

Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------



Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system 205, 1.9i CAT 1991 to 1993

Type		XU9J1/L/Z (DFZ) 75kW
Capacity (cm ³) / number of cylinders		1905 / 4
Compression ratio / pressure	bar	8.4 / _
Oil pressure	bar	2.1 [4.1]
Oil temperature	°C	80
Valve clearance - inlet	mm	0.20
Valve clearance - exhaust	mm	0.40
Firing order		1-3-4-2
No 1 cylinder position		FE
Thermostat opening temperature	°C	82
Radiator cap pressure	bar	1.0

Fuel system 205, 1.9i CAT 1991 to 1993

Idle speed - manual [auto]	rpm	900±50
Fast idle speed - manual [auto]	rpm	_
CO @ idle speed [3000 rpm] - see page VI	%	≤0.3
HC @ idle speed [3000 rpm] - see page VI	ppm	≤200
CO ₂ @ idle speed [3000 rpm] - see page VI	%	_
O ₂ @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection		Bosch
Type / ref		LU2-Jetronic
Main jet / needle		_
Injection pressure	bar	_
Pump pressure	bar	2.5
Octane rating	RON	95[U]

Ignition system 205, 1.9i CAT 1991 to 1993

Type		Electronic
Ignition coil		_
Primary resistance	ohms	0.82
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor		Bosch
Points gap (air gap)	mm	_
Dwell angle	° (%)	_
Condenser capacity	µF	_
Rotation		Anticlockwise
Ignition timing - basic [static	° Crankshaft @ rpm	10 BTDC @ 900
V = Vacuum NV = No Vacuum		_
Total ignition advance	° Crankshaft @ rpm	C031-D022
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	9 to 15 @ 1300
	° Crankshaft @ rpm	23 to 28 @ 2000
	° Crankshaft @ rpm	33 to 37 @ 5000
Vacuum range check	mbar	186 to 733
Maximum vacuum advance	° Crankshaft	20 to 24
Spark plugs		Eyquem/Champion
Type		RFC52LS / C9YCX
Electrode gap	mm	0.80

Electrical system 205, 1.9i CAT 1991 to 1993

Battery	V / CC / RC	12 / 210 / 65
Alternator voltage / full load current / engine rpm		13.8 to 14.8 / _ / 3000
Starter motor current / voltage - cranking	A / V	_
- locked	A / V	_

Running gear 205, 1.9i CAT 1991 to 1993

Brakes -		
Front (min. friction material thickness)	mm	1.0
Rear (min. friction material thickness)	mm	_
Tyres		
Saloon	Size	185/60x14
Estate / Van	Size	_
Pressure - front / rear - Saloon	bar	2.0 / 2.0
- Estate / Van	bar	_
Front suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	+1.0±0.5 PW
Camber		0±30'
Castor		+2°50'±30'
King pin inclination		+10°±30'
Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	+1.8±0.8 PW
Camber		-50'±30'

Torque wrench settings 205, 1.9i CAT 1991 to 1993


Cylinder head - stage 1	Nm	60
- stage 2	Nm	Slacken
Cylinder head - stage 3	Nm	20
- stage 4	Nm	+ 300°
Big-end bearings	Nm	40 ¹
Main bearings	Nm	49
Clutch cover	Nm	_
Flywheel [driveplate]	Nm	49 LkC
Front hubs	Nm	260
Rear hubs	Nm	200
Wheel nuts / bolts	Nm	85
Spark plugs	Nm	25 to 30

Capacities 205, 1.9i CAT 1991 to 1993


Engine oil & filter	litres	5.0. 93 MY: 4.5
Gearbox - 4-speed [5-speed]	litres	2.0
Automatic transmission - refill	litres	2.4
Final drive	litres	WT
Cooling system	litres	6.6
Fuel tank	litres	50

Notes and Illustrations

¹Slacken, then 20 + 70°

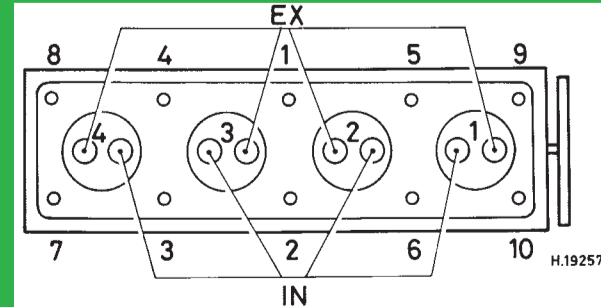

1905 cm³

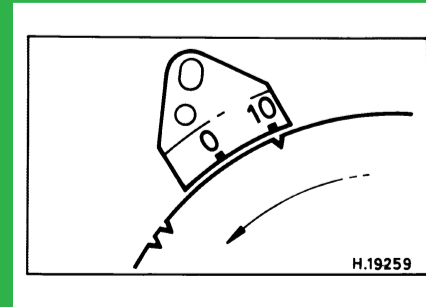

1905 cm³