


Service
Service
Service

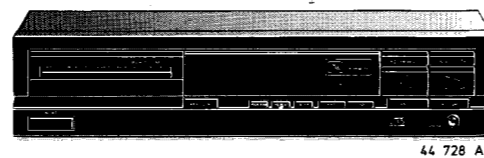

44 728 A11

Service Manual

COMPACT
disc
DIGITAL AUDIO

CONTENTS

- 1 Operations
- 2 Technical data
Servicing hints
Exploded view and parts list mechanical components
- 3 Measurements and adjustments
Blockdiagram
Circuit diagram
Panel data
Wiring diagram
Partslist electrical components

(GB)

Safety regulations require that the set be restored to its original condition and that parts which are identical with those specified be used.

(NL)

Veiligheidsbepalingen vereisen, dat het apparaat in zijn oorspronkelijke toestand wordt teruggebracht en dat onderdelen, identiek aan de gespecificeerde worden toegepast.

(F)

Les normes de sécurité exigent que l'appareil soit remis à l'état d'origine et que soient utilisées les pièces de rechange identiques à celles spécifiées.

(D)



Bei jeder Reparatur sind die geltenden Sicherheitsvorschriften zu beachten. Der Originalzustand des Geräts darf nicht verändert werden für Reparaturen sind Original-Ersatzteile zu verwenden.

(I)

Le norme di sicurezza esigono che l'apparecchio venga rimesso nelle condizioni originali e che siano utilizzati pezzi di ricambio identici a quelli specificati.

CLASS 1
LASER PRODUCT

3122 110 03420

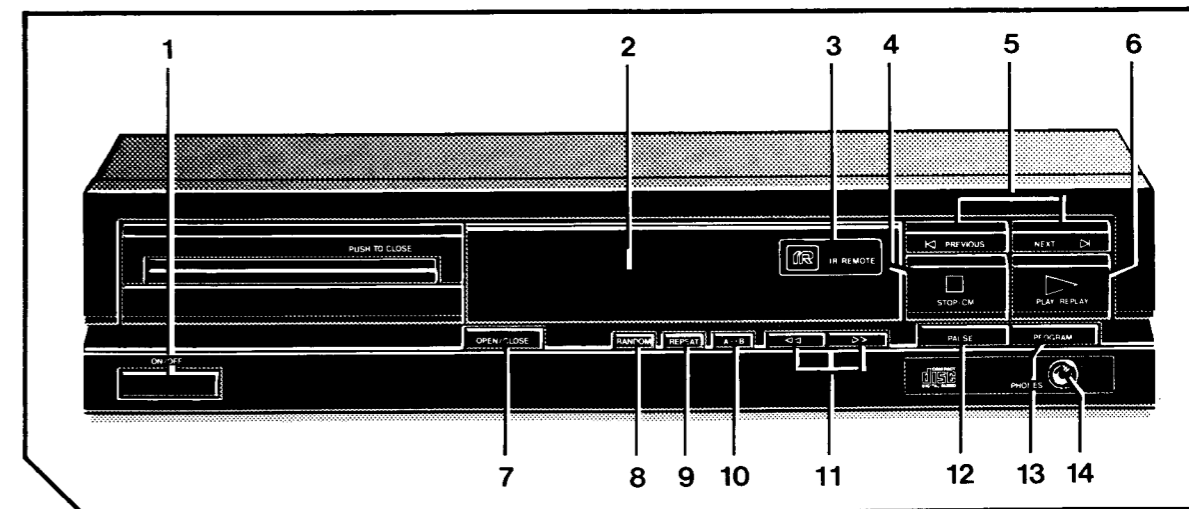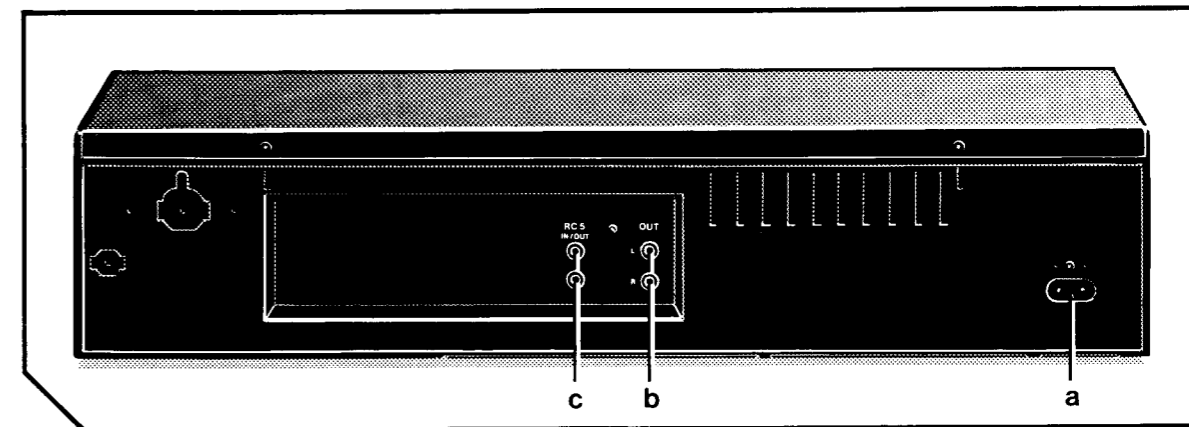

44 729 A11

OPERATION

Explanation of keys

- 1 **ON/OFF**
For switching on and off.
- 2 **DISPLAY**
Informs you about the functioning of the player.
Displays details from the disc contents list.
- 3 **IR REMOTE (not for CD600)**
Receives the signals from the remote control.
- 4 **STOP/CM**
For stopping play (STOP)
For erasing a programme (CM = Clear Memory).
- 5 **PREVIOUS and NEXT**
For selecting another track during play.
For selecting a track number to start play.
For selecting track numbers when compiling a programme.
(PREVIOUS from high to low and NEXT from low to high.)
- 6 **PLAY/REPLAY**
For starting play (PLAY)
For returning to the beginning of a track (REPLAY).
- 7 **OPEN/CLOSE**
For opening and closing the disc tray.
- 8 **RANDOM**
For playing in random order.
- 9 **REPEAT**
For repeating a disc or a programme.
- 10 **'A-B'**
For setting the starting and stopping point of a passage to be repeated.

11 'FF FF'

For fast search to a particular passage during play. ('<<' backwards and '>>' forwards.)

12 PAUSE

For interrupting play.
For holding play at the start of a disc, track or passage.

13 PROGRAM

For storing track numbers in a programme.
For erasing track numbers from a programme.
For checking a programme.

14 PHONES

For connection of headphones

CONNECTIONS

- a. Connection for the mains lead.
- b. **OUT L R**: the connecting cable to the amplifier.
 - Insert a red plug into the 'R' socket (right-hand channel) and the other plug into the 'L' socket (left-hand channel).
 - Insert the two other plugs into the corresponding sockets of the CD or AUX input of your amplifier. You can also use the TUNER or TAPE IN connection, but **never** the PHONO input. This is not suitable for Compact Disc reproduction.
- c. **RC 5 IN/OUT**: for a remote control system.
Use this connection for:
 - Connecting up the equipment when you are incorporating the player in a PHILIPS HiFi system with its own remote control system.
 - Connecting the remote control receiver EM 2200, available as an accessory, if the siting of the player prevents its IR REMOTE eye from receiving the signals from the remote control directly.

TECHNICAL DATA

General

1. Mains voltage : /00R/05R: 220, 240 Volt (+/- 10%)
: /07R/17R: 117 Volt
2. Mains frequency : 50-60 Hz
3. Mains voltage selection : By soldering (220/240 Volt-version)
By changing transformer (110/127 Volt-version)
4. Power consumption mains, operated : 15 W

External RC-5 connection

Specification: V-in Low: from -2,0 V to +1,6 V
V-in High: from +3 V to +7,5 V
R-in: from 47 kOhm to 68 kOhm

Line output

- Number of channels : 2
- Output voltage : 2 Vrms +/- 2 dB
- Unbalance Left-Right : max. +/- 0,5 dB
- Output resistance : 1kOhm
- Amplitude linearity : max. +/- 0,15 dB from 20 Hz to 20 kHz
- Phase non-linearity : max. +/- 1,0° from 20 Hz to 20 kHz
- Signal to noise ratio : min 90 dB from 20 Hz to 20 kHz
- Dynamic range : min 80 dB from 20 Hz to 20 kHz
- Total harmonic distortion + noise : min 66 dB from 20 Hz to 20 kHz
- Intermodulation distortion : max. 0,05% (min 66 dB) from 20 Hz to 20 kHz
- Out-band attenuation : min 50 dB above 24,8 kHz from 20 Hz to 20 kHz
- Channel separation : min 80 dB from 20 Hz to 20 kHz
- Muting during random access : min 90 dB from 20 Hz to 20 kHz
- Automatic switched de-emphasis with time constants: 15/50 µs

Headphone

- Output voltage : Max. 2 Vrms +/- 2 dB
- Unbalance Left-right : Max. +/- 0,5 dB
- Output resistance : 150 Ohm
- Load impedance range : 32 Ohm to 600 Ohm
- Output power : Max. 6 mW into 32 Ohm load
Max. 10 mW into 150 Ohm load
Max. 6 mW into 600 Ohm load

Dimensions and weight

- Place and height of feet acc. to Philips C6 specification
- Apparatus tray closed WxDxH : 420 x 280 x 90/104 mm
- Apparatus tray open WxDxH : 420 x 423 x 90/104 mm
- Weight : 3,8 kg

GB WARNING

All ICs and many other semi-conductors are susceptible to electrostatic discharges (ESD). Careless handling during repair can reduce life drastically. When repairing, make sure that you are connected with the same potential as the mass of the set via a wrist wrap with resistance. Keep components and tools also at this potential.

F ATTENTION

Tous les IC et beaucoup d'autres semi-conducteurs sont sensibles aux décharges statiques (ESD). Leur longévité pourrait être considérablement écourtée par le fait qu'aucune précaution n'est prise à leur manipulation. Lors de réparations, s'assurer de bien être relié au même potentiel que la masse de l'appareil et enfilez le bracelet muni d'une résistance de sécurité. Veiller à ce que les composants ainsi que les outils que l'on utilise soient également à ce potentiel.

D WARNUNG

Alle ICs und viele andere Halbleiter sind empfindlich gegenüber elektrostatischen Entladungen (ESD). Unvorsichtige Behandlung im Reparaturfall kann die Lebensdauer drastisch reduzieren. Veranlassen Sie, dass Sie im Reparaturfall über ein Pulsarmband mit Widerstand verbunden sind mit dem gleichen Potential wie die Masse des Gerätes. Bauteile und Hilfsmittel auch auf dieses gleiche Potential halten.

NL WAARSCHUWING

Alle IC's en vele andere halfgeleiders zijn gevoelig voor electrostatische ontladingen (ESD). Onzorgvuldig behandelen tijdens reparatie kan de levensduur drastisch doen verminderen. Zorg ervoor dat u tijdens reparatie via een polsband met weerstand verbonden bent met hetzelfde potentiaal als de massa van het apparaat. Houd componenten en hulpmiddelen ook op ditzelfde potentiaal.

I AVVERTIMENTO

Tutti IC e parecchi semi-conduttori sono sensibili alle scariche statiche (ESD). La loro longevità potrebbe essere fortemente ridotta in caso di non osservazione della più grande cauzione alla loro manipolazione. Durante le riparazioni occorre quindi essere collegato allo stesso potenziale che quello della massa dell'apparecchio tramite un braccialetto a resistenza. Assicurarasi che i componenti e anche gli utensili con quali si lavora siano anche a questo potenziale.



SERVICING HINTS

In the set chip components have been applied. For disassembly and assembly of chip components see the figure below.


The disc should always rest properly on the turntable. To achieve this a disc hold-down has been mounted in a bracket of the tray mechanism. If the tray mechanism has to be disassembled for servicing, a separate disc hold-down should be used. (See drawing "Service disc hold-down")


The set can function normally then. Code number of the disc hold-down is 4822 462 50383.

When the tray mechanism has been disassembled, the tray switch must be activated immediately after pressing the play button in order to ensure normal operation. By servicing the apparatus in the upside down position it is also possible to short circuit points A and B temporarily instead of activating the switch.


SERVICE TOOLS

Audio signals disc	4822 397 30184
Disc without errors (test disc 5) + disc with DO errors, black spots and fingerprints (test disc 5A)	4822 397 30096
Disc 65 min 1 kHz without pause	4822 397 30155
Max. diameter disc(58.0 mm)	4822 397 60141
Torx screwdrivers	
Set (straight)	4822 395 50145
Set (square)	4822 395 50132
13th order filter	4822 395 30204
Service cable (4p)	4822 321 21284
Service flexfoil (14p)	4822 322 40066
Service connector (14p)	4822 267 50676
Green LED CQY G11	5322 130 32182

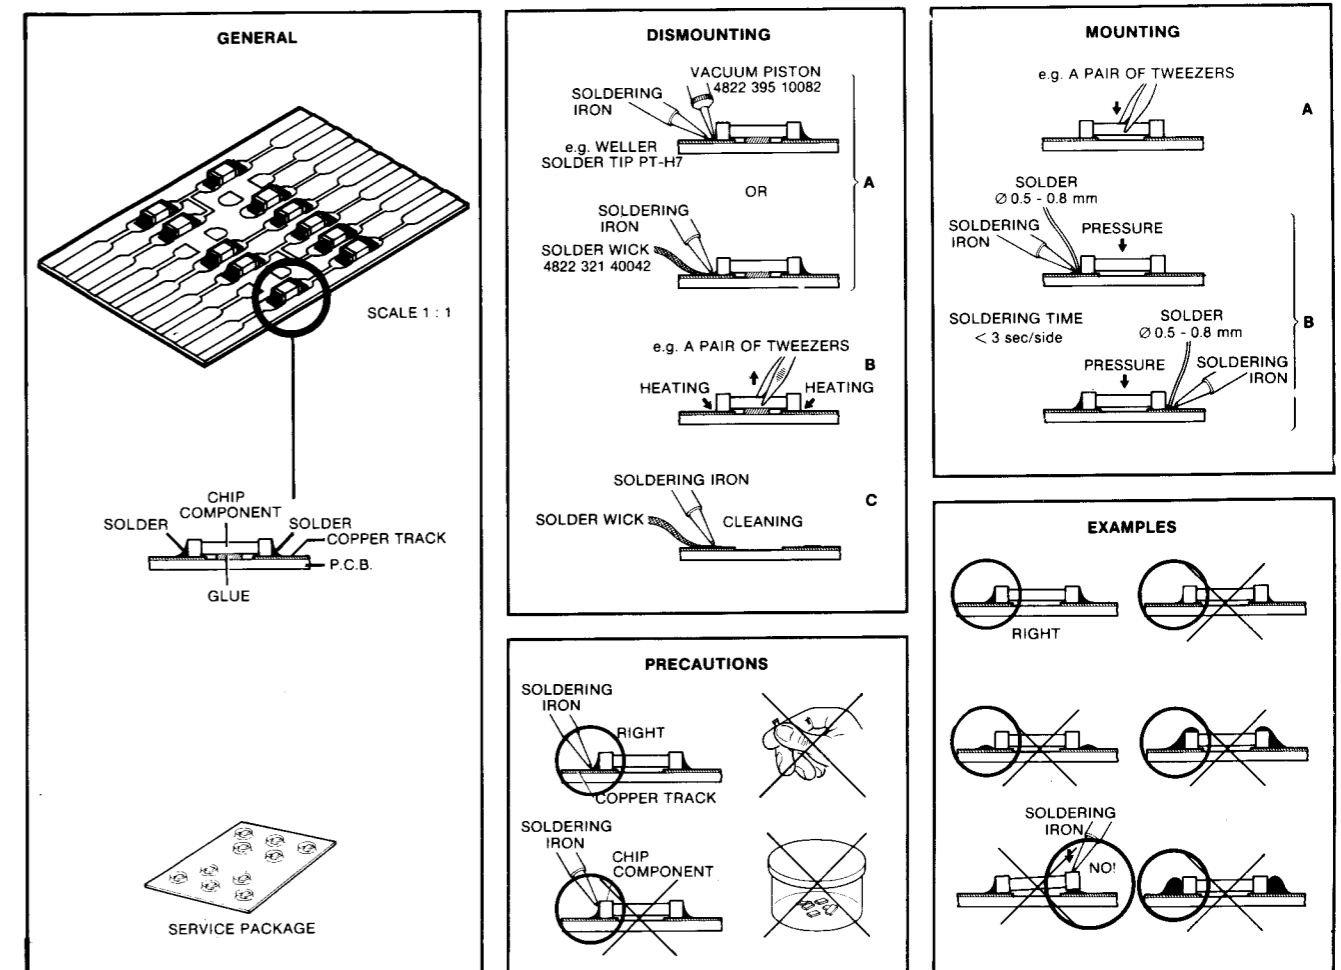

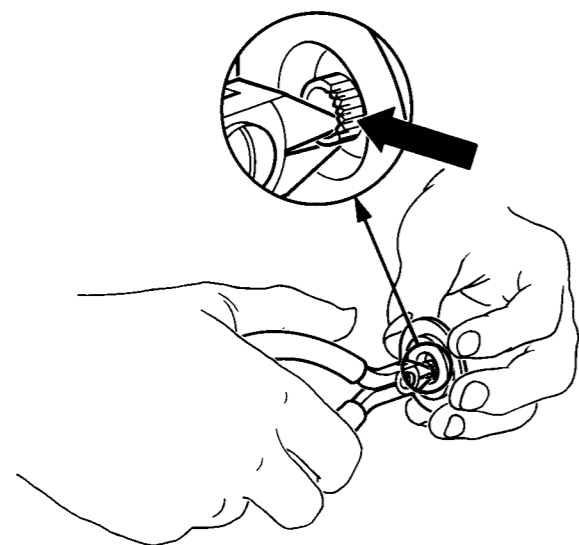


42 565 A12

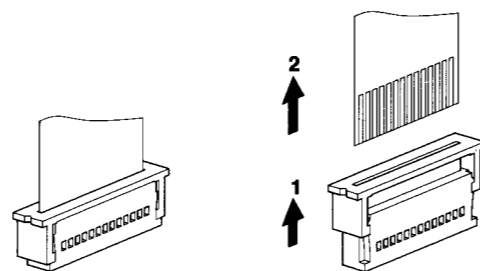


MDA.01408
T29/922

MEASURING AND ADJUSTMENT POSITION
OF THE SET

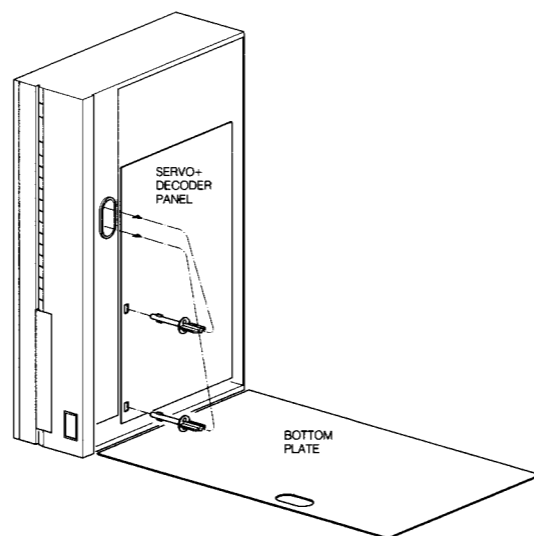


MDA.02138
916/T19

FOIL CONNECTION POSITION.

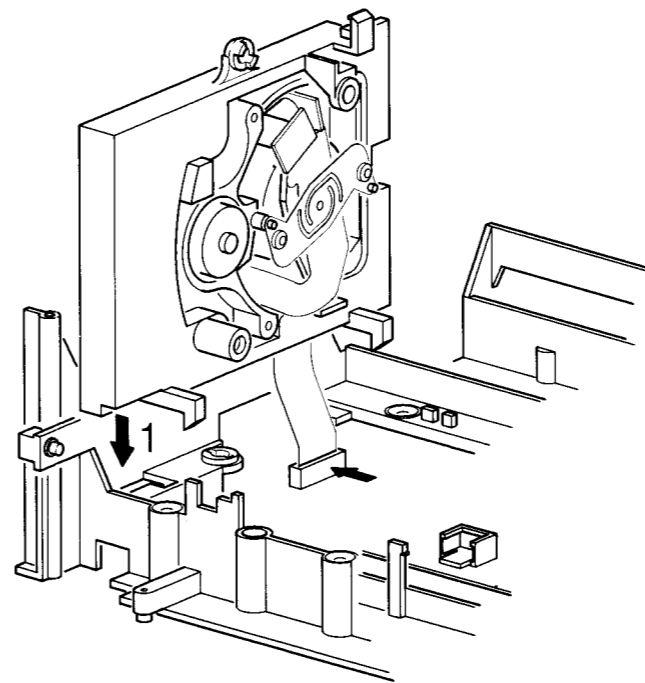


FLAY-SERVICE POSITION

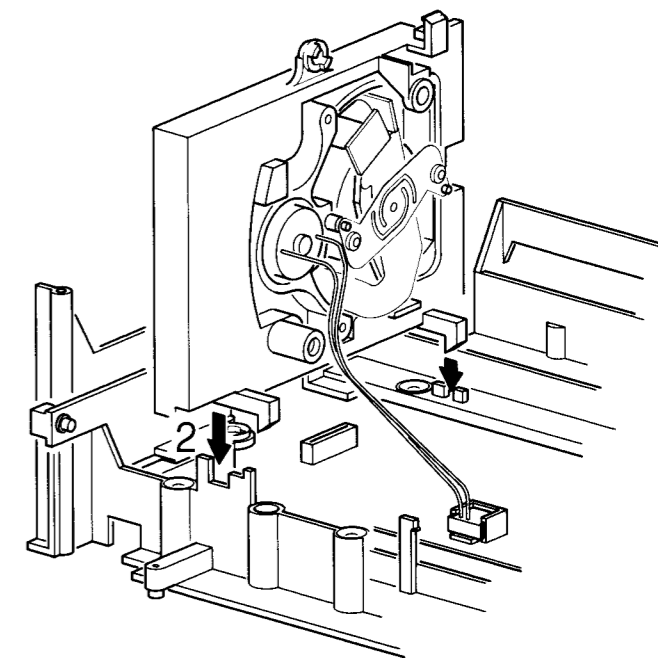



EVA.00848
916/T19

EXTENSION CABLE

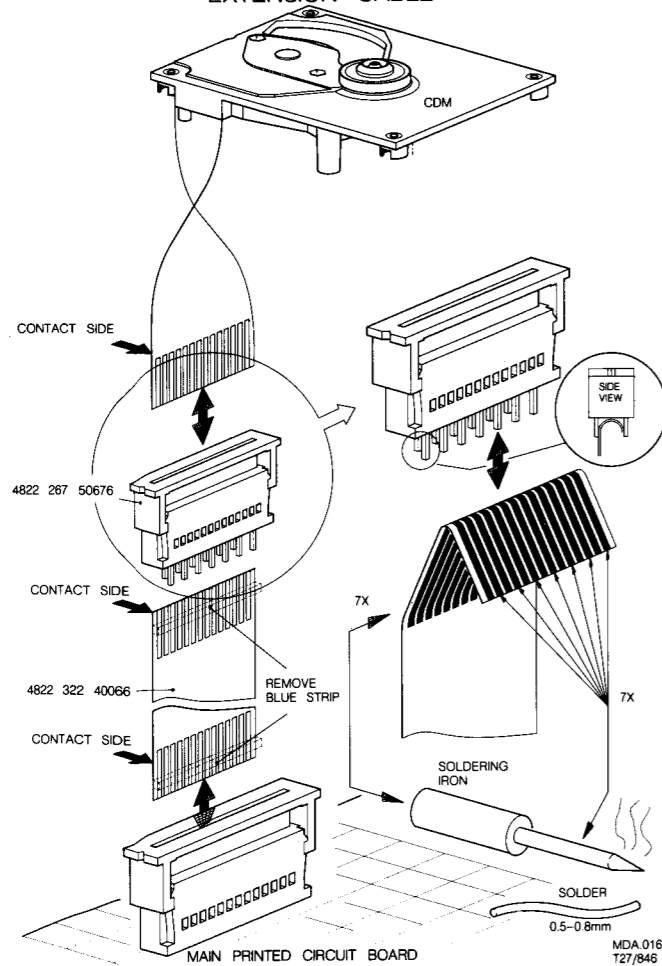


MDA.01671
T27/846

CABINET DISASSEMBLY HINTS

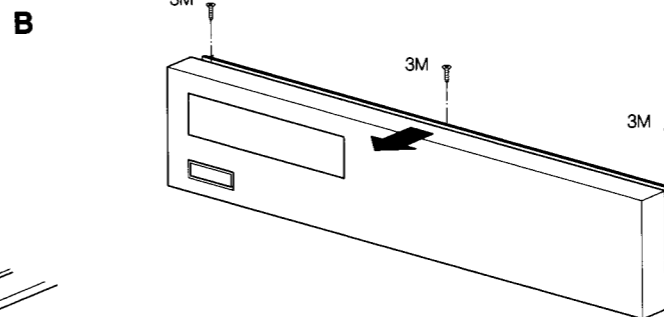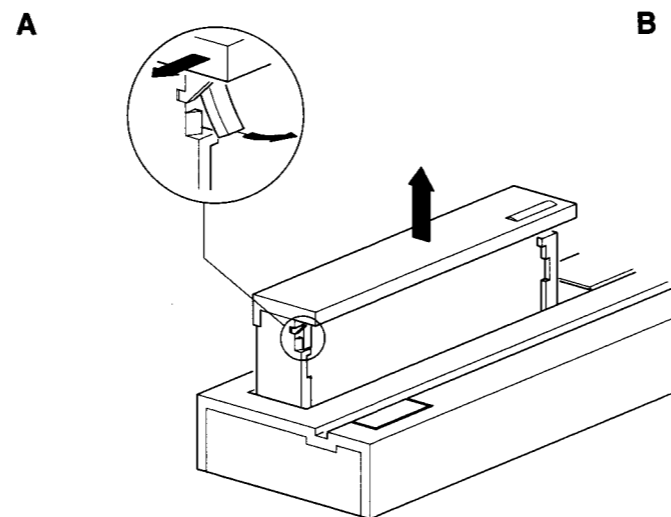


MDA.02137
916/T19

SERVICE POSITION PLAY

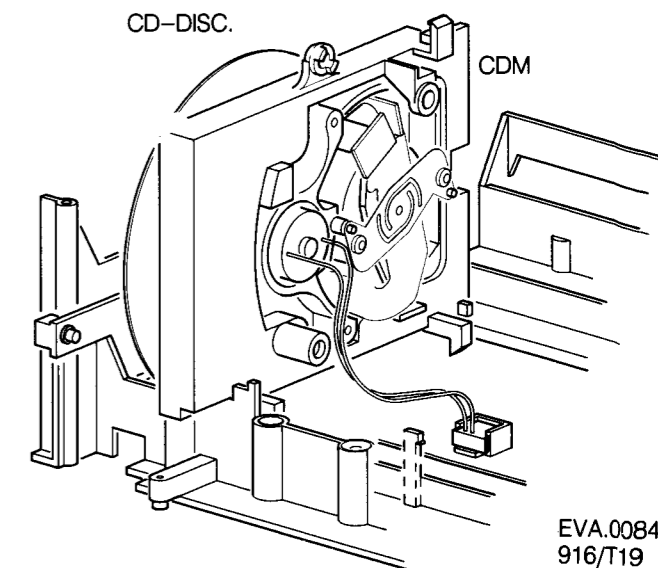

EVA.00849
916/T19

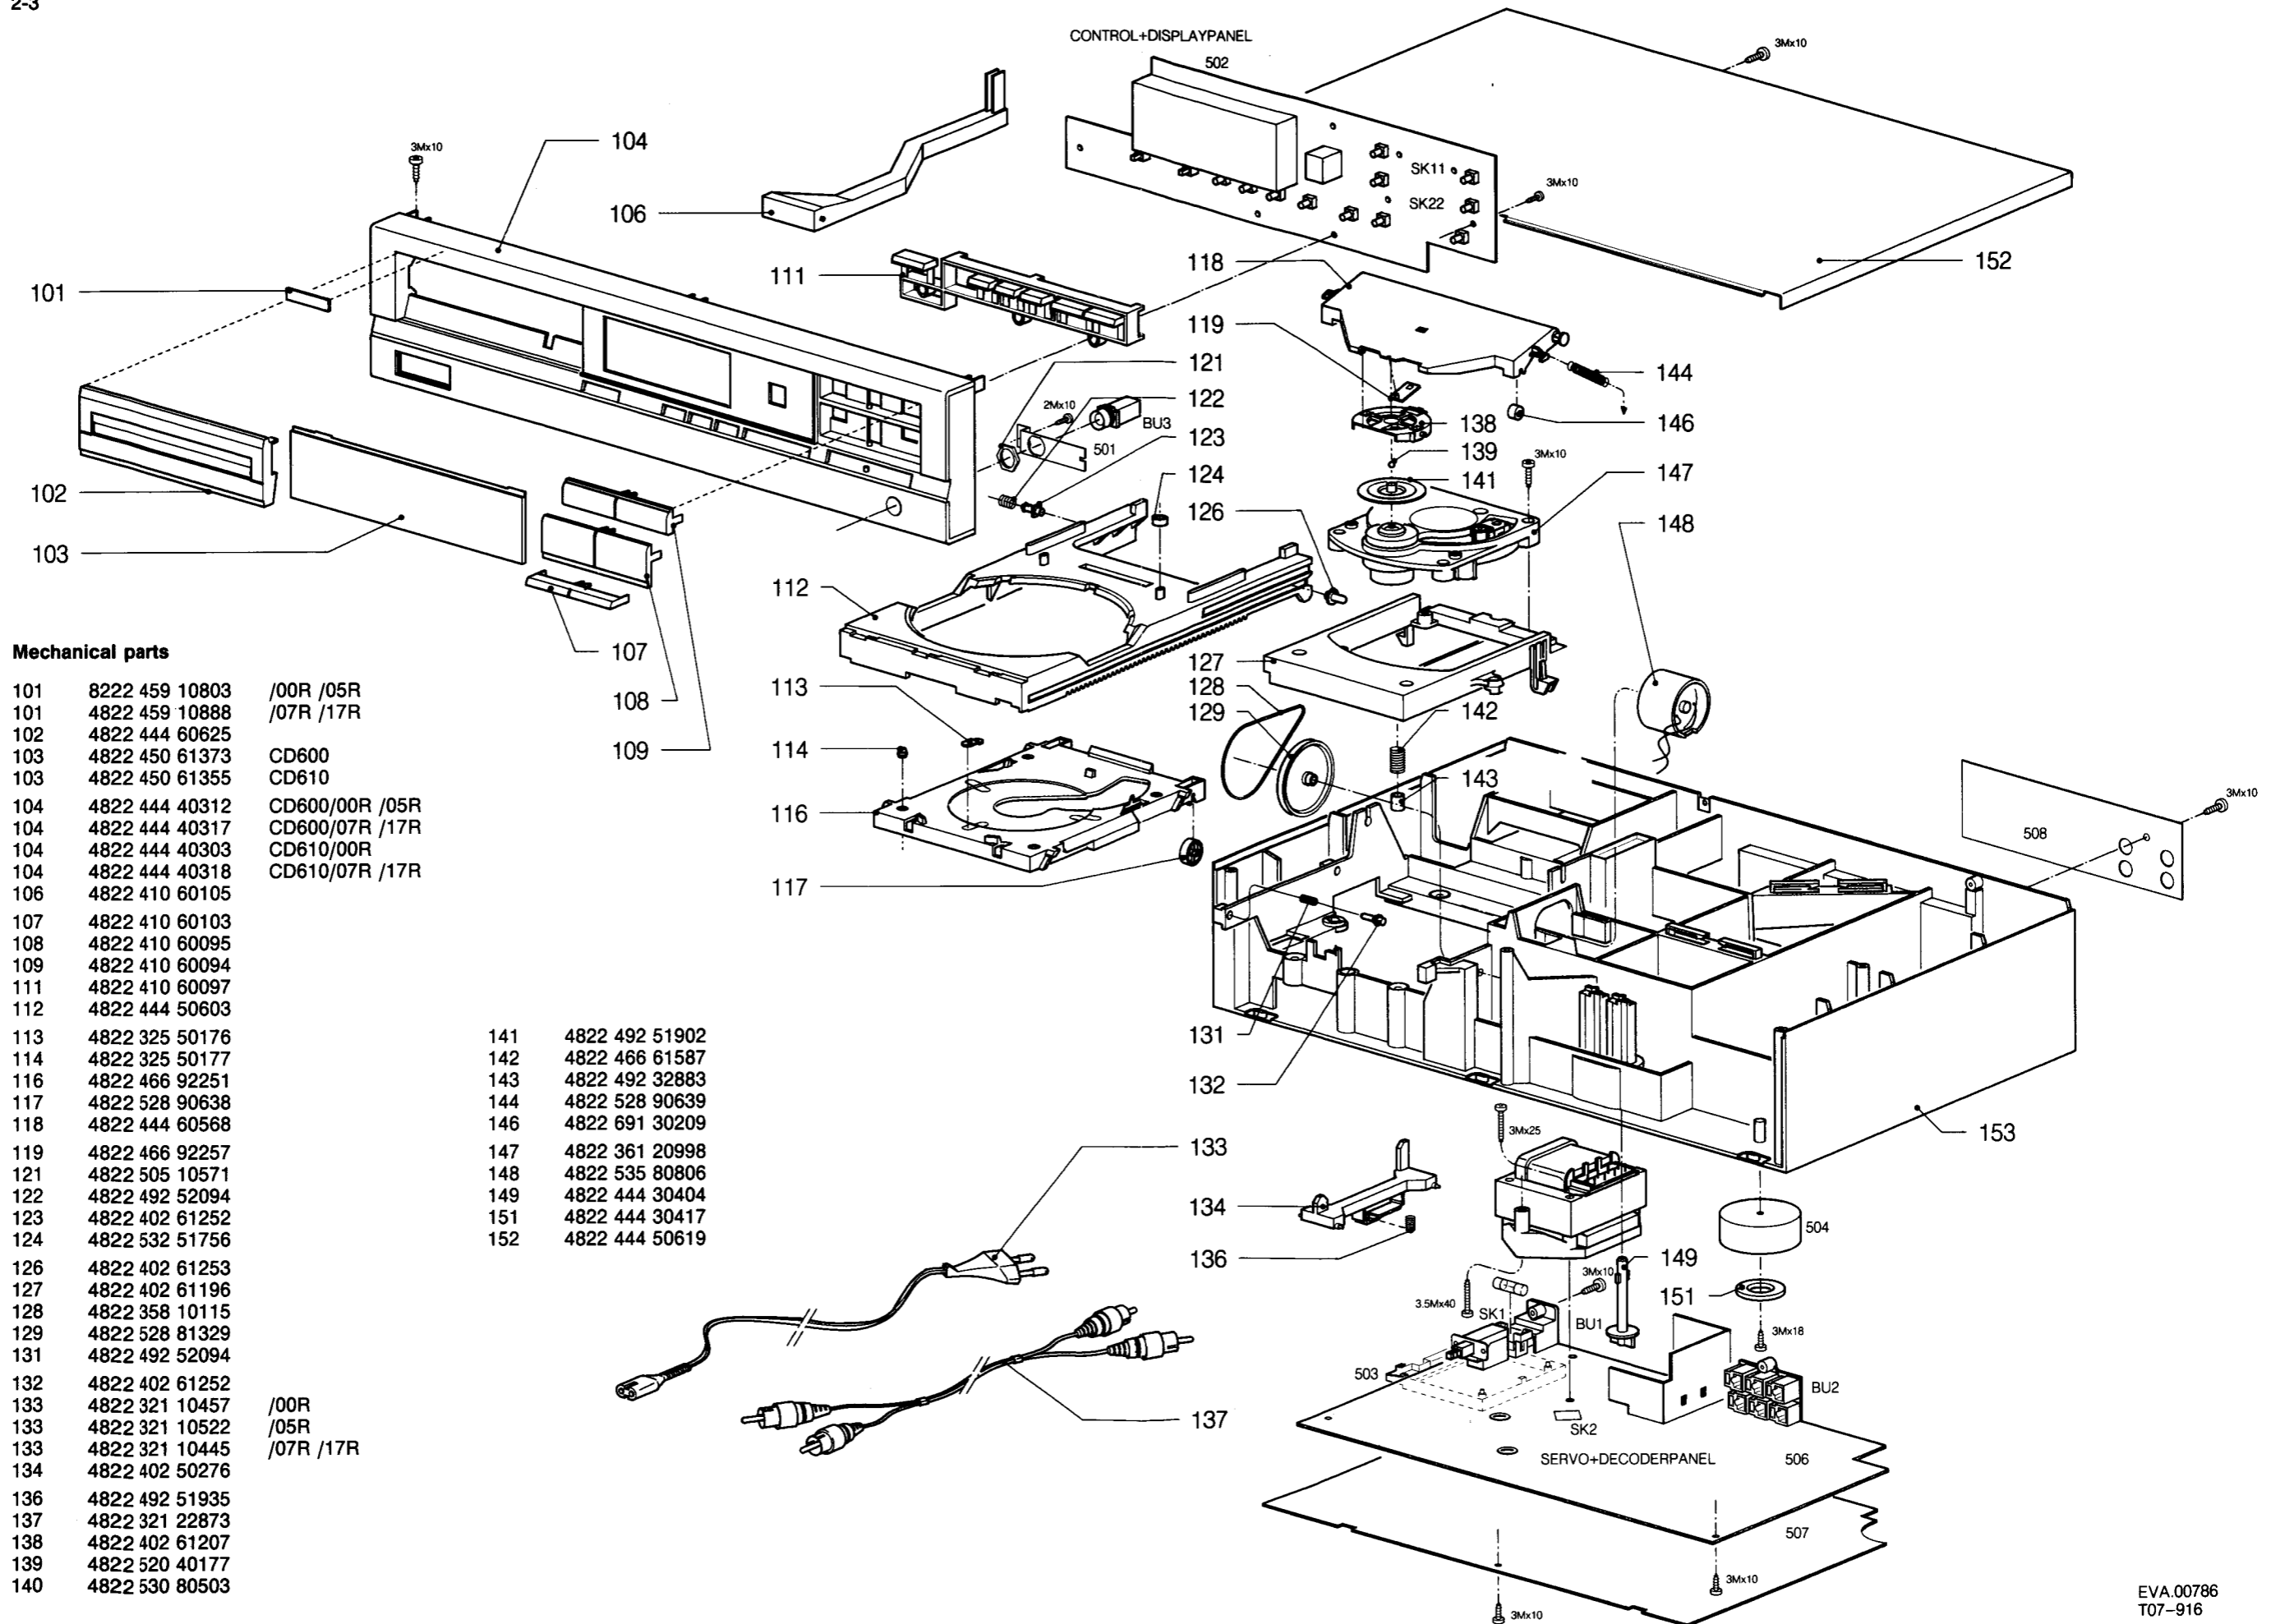

Mechanical parts

101	8222 459 10803	/00R /05R
101	4822 459 10888	/07R /17R
102	4822 444 60625	
103	4822 450 61373	CD600
103	4822 450 61355	CD610
104	4822 444 40312	CD600/00R /05R
104	4822 444 40317	CD600/07R /17R
104	4822 444 40303	CD610/00R
104	4822 444 40318	CD610/07R /17R
106	4822 410 60105	
107	4822 410 60103	
108	4822 410 60095	
109	4822 410 60094	
111	4822 410 60097	
112	4822 444 50603	
113	4822 325 50176	
114	4822 325 50177	
116	4822 466 92251	
117	4822 528 90638	
118	4822 444 60568	
119	4822 466 92257	
121	4822 505 10571	
122	4822 492 52094	
123	4822 402 61252	
124	4822 532 51756	
126	4822 402 61253	
127	4822 402 61196	
128	4822 358 10115	
129	4822 528 81329	
131	4822 492 52094	
132	4822 402 61252	
133	4822 321 10457	/00R
133	4822 321 10522	/05R
133	4822 321 10445	/07R /17R
134	4822 402 50276	
136	4822 492 51935	
137	4822 321 22873	
138	4822 402 61207	
139	4822 520 40177	
140	4822 530 80503	


141	4822 492 51902
142	4822 466 61587
143	4822 492 32883
144	4822 528 90639
146	4822 691 30209
147	4822 361 20998
148	4822 535 80806
149	4822 444 30404
151	4822 444 30417
152	4822 444 50619

TROUBLE SHOOTING (FAULT FINDING TREE)

START-UP PROCEDURE

Follow the path of the faultfinding tree beginning at the top left. Perform the actions you come across in the various blocks. Look at the various side branches to find out if the information you see there applies to your problem. If, for instance, you find the indication "display", this means that no picture appears on the display.

If you establish this fault, follow the branch and perform the recommended actions. Check the signals mentioned. In a number of branches further reference is made to measurements you could carry out. These measurements are explained in several tables further on in this manual.

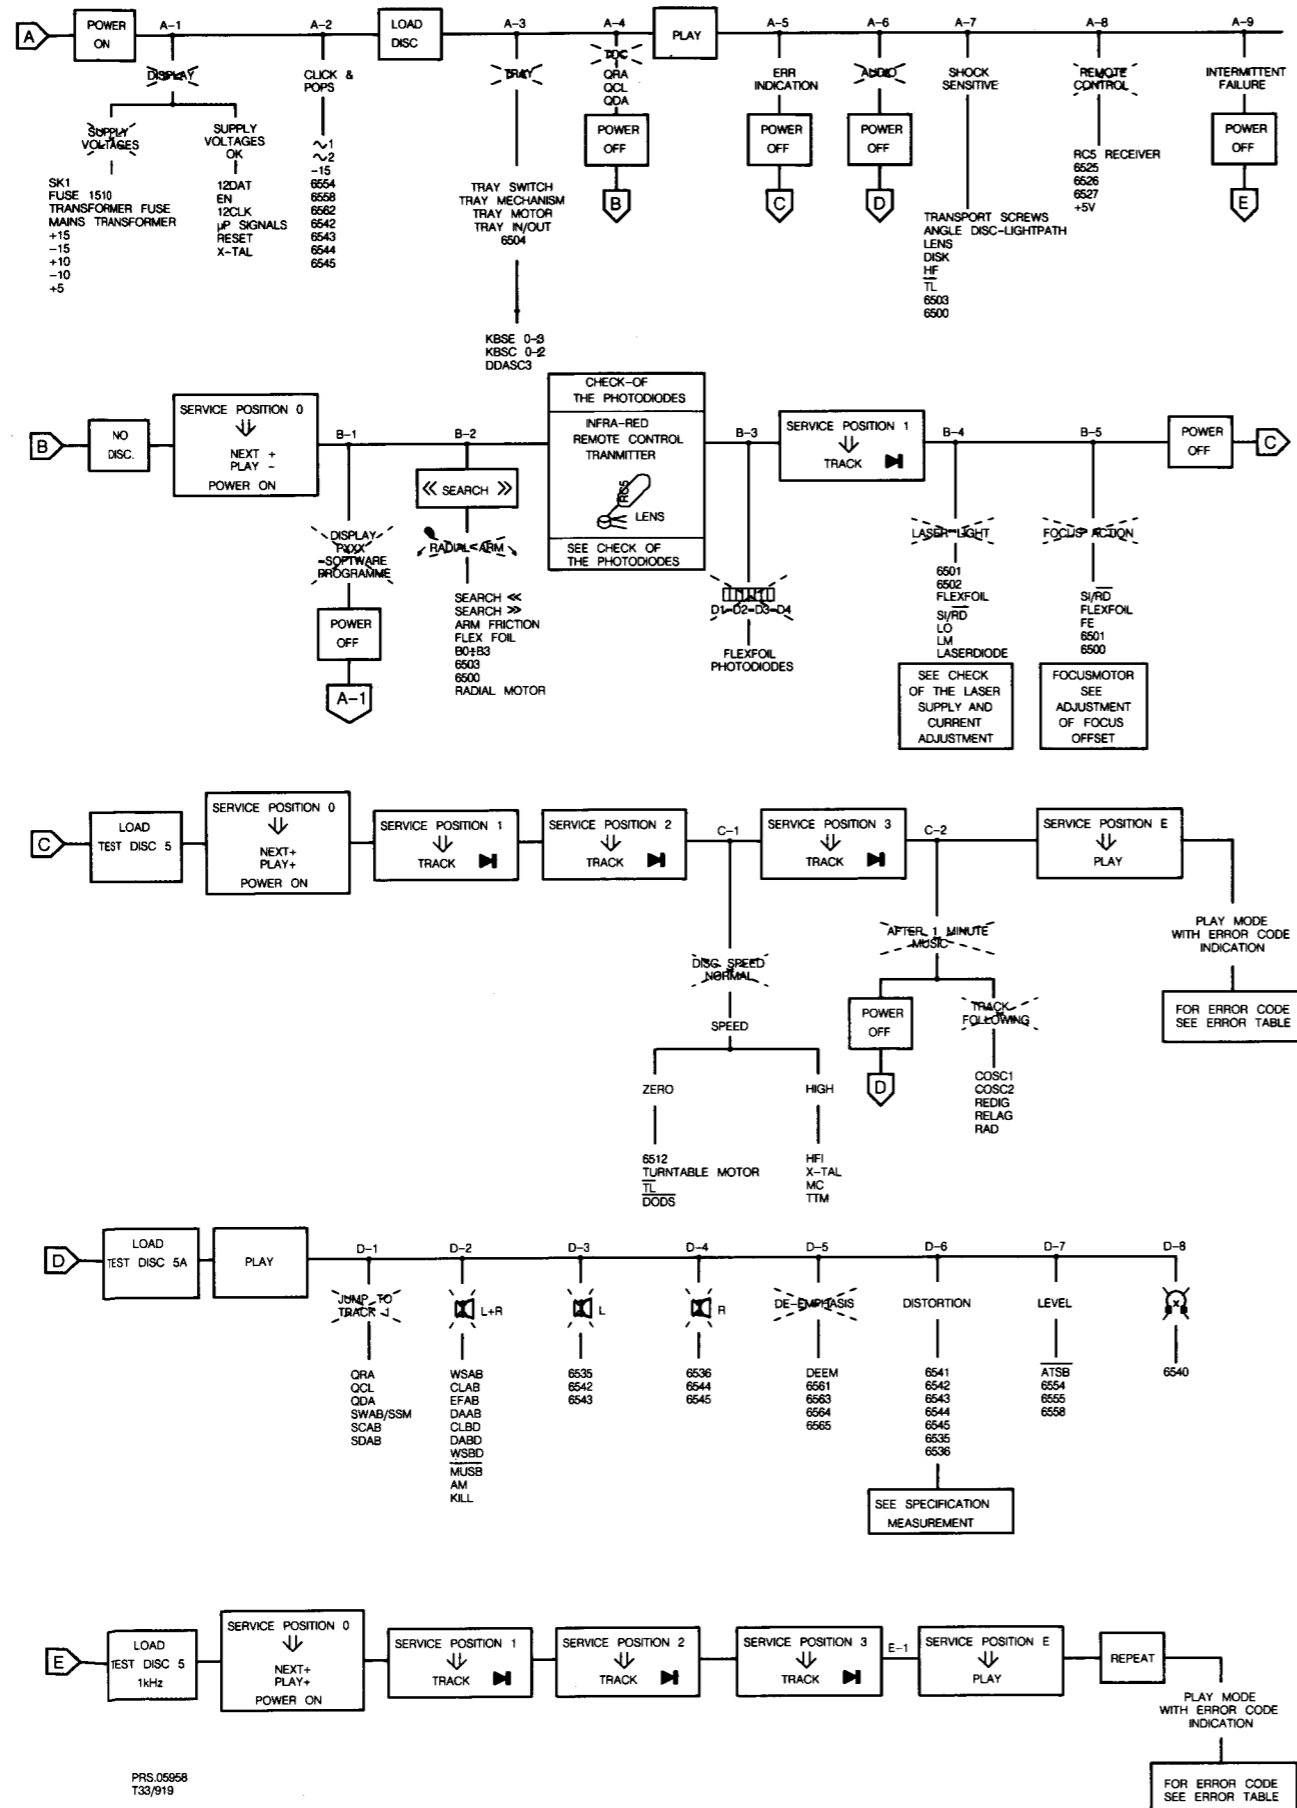

PRS 05958
T33/919

B-3 CHECK OF THE PHOTODIODES

Step	Signal	Mode					Remarks
1	D2 D1 D3 D4	power on		-	-		signal 4±6±7±8 IR LED of remote control

T-22407A

B-4 CHECK OF LASER SUPPLY

The laser, the lasersupply plus the monitor diode form a feedback system. A defect in the lasersupply may result in the destruction of the laser. If, in that case, the laser is replaced, (= complete D.C.M.-unit) the new laser will also become defective. However, it is impossible to check and repair a feedback system if a link is missing. For this reason the laser supply can be checked with the replacement circuit for laser assembly.

Step	Signal	Mode			Remarks
1	LO	serv. pos. 2 SK		1.8<V <2.3	PRS05539
	LM			170<mV <220	
2	LO	serv. pos. 2 SK		1.8<V <2.3	PRS05540
	LM			170<mV <220	
3	LO	Power on		0V ± 0.2V	No light

T-22407B

B-4 LASER CURRENT ADJUSTMENT

Step	Signal	Mode					Remarks
1	-	Power off		R3520	1kΩ	-	Pre-adjustment Ohmic value
2	Eye-pattern HF	Power on Test disc 5 play		-	-	-	EYE pattern
3	laser current = voltage across R3508	Test disc 5 play track 1		R3520	50 mV DC	-	High-ohmic measurement

T-22407C

B-5 ADJUSTMENT OF FOCUS-OFFSET

Step	Signal	Mode					Remarks
1	-	Power on no disc	-	-	R3568	-	adjust for optical mid-position of the focus motor
2	FE LAG	Play Test disc 5 Track 1	27	-	R3568	400mV ± 40 mV DC	fine adjustment

T-22407D

ERROR TABLE

System errors

Er 01: RD pulse is missing. Check the start capacity Sc, the RD signal and the photodiode signal processor. (Starting error)

Er 02: TL pulse is missing during start-up. Check the TL signal, the HF-signal and the Photodiode signal processor. (Starting error)

Er 03: Lead-in track not found. Check the disc used. Check also that the radial arm rests against the inside. Check the RE-dig signal and the Radial error processor. (Starting error)

Er 04: Too many TL pulses during play. Check the quality of the disc used. Check the HFD signal. (Error during PLAY)

Er 05: TL pulse is low for more than 50 msec. Check the disc used. Check the HF-in signal and the photodiodes (Error during PLAY)

Er 06: No TL pulse received within 0.5 sec. in case of track jumping. Check the RE-lag circuit. (Error during SEARCH or NEXT/PREVIOUS)

Er 07: Subcode error. In case of track loss during play the information of the subcode is used to determine the place of the last information that was still well readable. In case of an interruption of HF or other signals, this will lead to Er 07. (Error during PLAY)

Er 08: TOC error (Table of Contents). Check the quality of the disc used. Check the initial speed of the turntable motor and the motor control. Check also that the radial arm rests against the inside. (Starting error)

Operating errors

Er 30: NEXT when repeat is off.

Er 31: PREVIOUS when repeat is off.

Er 32: INDEX selected when no track selected.

Er 33: Selected index does not exist on this CD.

Er 34: Review error: no program.


Er 35: Program memory full.

Er 36: Programmed track is non existing on this CD.


Er 37: Selected track is non existing on this CD.

Er 60: Fast forward bound.

Er 61: Fast reverse bound.

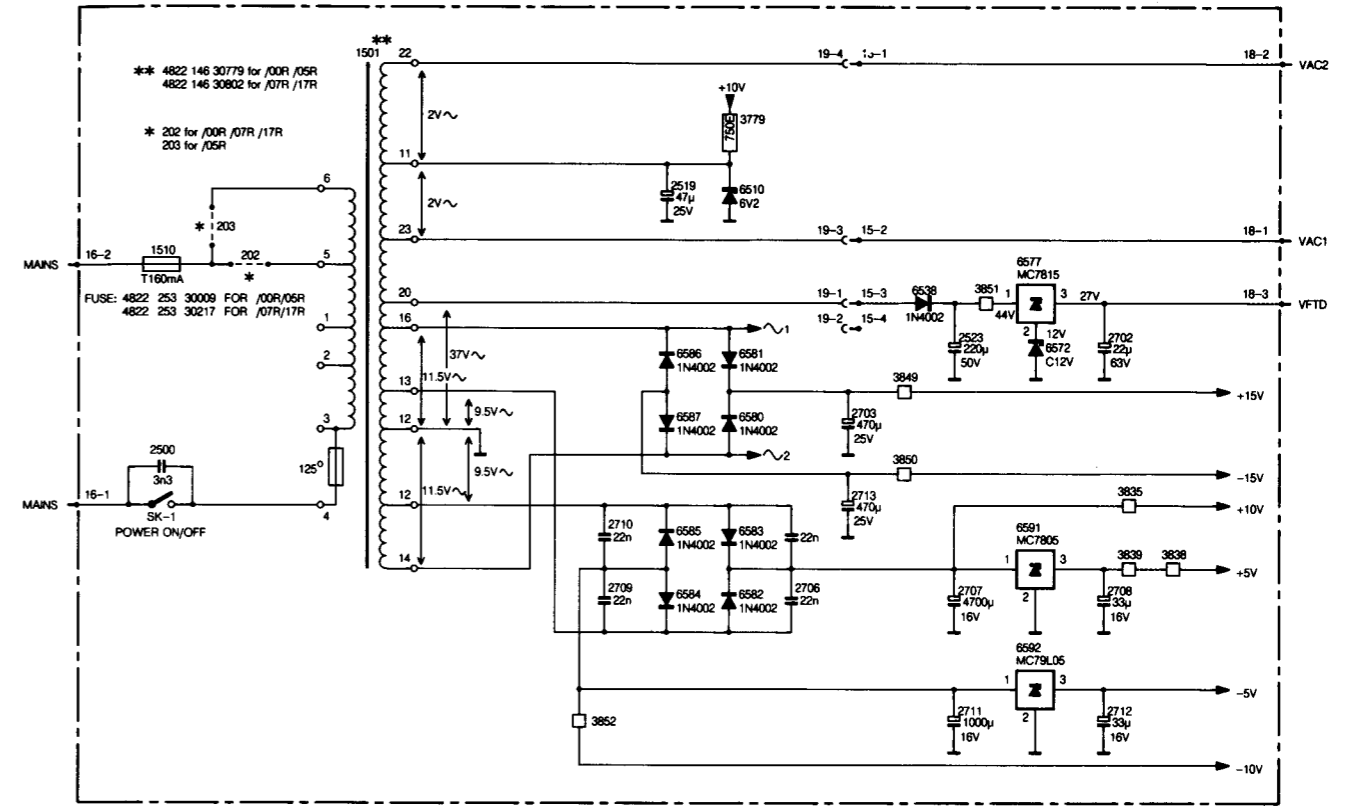


U.S. VERSIONS:

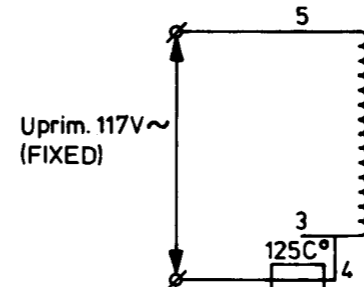


THERMAL FUSE : 4822 252 20108

EUROPEAN VERSIONS:

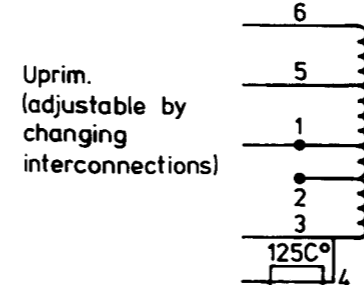


THERMAL FUSE : 4822 252 20017

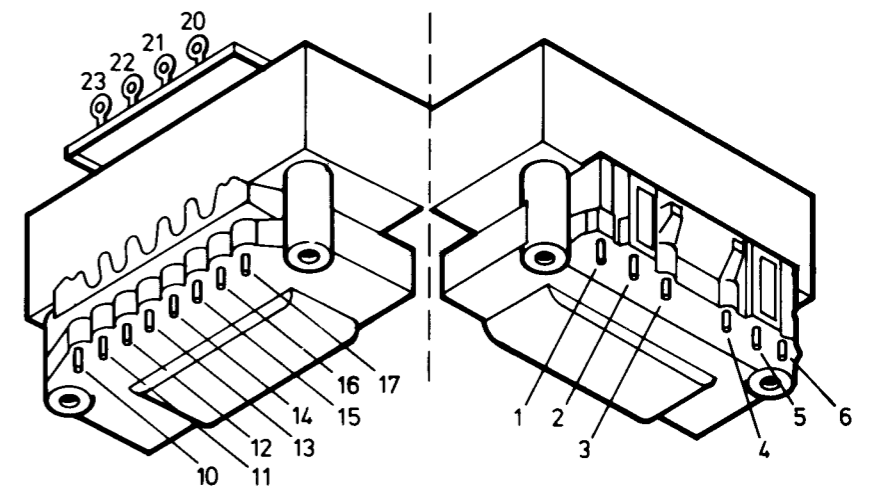

44 737 A11


100	F 2	119	E 4	135	E 5	151	C 5	167	E 5	186	B 8	203	B 2	2507	E 4	2532	D 2	2564	E 2	2612	F 9	2647	F 5	2693	F 7	2712	B 6	3522	F 3	3575	F 4	3602	E 8	3626	C 8	3648	C 10	3672	C 9	3702	B 7	3737	D 9	3803	A 6	3821	E 5	3836	F 5	
101	F 10	120	F 6	137	D 7	152	D 5	168	D 5	188	F 6	11	F 5	2508	E 2	2534	D 2	2565	F 6	2620	F 4	2664	C 10	2696	D 10	2712	F 11	B 6	3523	F 3	3576	F 4	3603	E 7	3627	C 8	3649	C 10	3673	C 9	3703	B 7	3738	E 9	3804	A 6	3822	B 8	3837	F 5
103	B 8	121	F 3	138	F 9	153	E 3	170	F 9	189	C 6	14	F 5	2509	E 2	2535	D 2	2566	F 6	2621	F 4	2665	C 10	2697	D 10	2713	F 11	B 6	3524	F 3	3577	F 4	3604	E 7	3628	C 8	3650	C 10	3674	C 9	3704	B 7	3739	D 9	3805	D 10	3823	B 8	3838	D 6
104	CC 8	122	F 7	139	D 9	154	D 4	171	D 5	190	F 10	15	B 6	2510	E 3	2536	D 2	2567	F 6	2622	F 4	2666	C 10	2698	D 9	2714	F 11	B 6	3525	F 3	3578	F 4	3605	E 7	3629	C 8	3651	C 10	3675	B 8	3705	B 8	3740	D 10	3807	F 4	3824	F 4	3839	C 7
105	CC 8	123	F 3	140	F 9	155	D 5	172	D 5	191	C 10	1501	A 4	2511	E 3	2537	D 2	2568	F 6	2623	F 4	2667	C 10	2699	D 9	2715	F 11	B 6	3526	F 3	3579	F 4	3606	E 7	3630	D 8	3652	F 10	3676	B 8	3706	B 8	3741	D 9	3808	E 4	3825	E 5	3840	E 2
106	F 6	124	B 9	141	D 5	156	D 5	173	D 5	192	B 6	1502	F 10	2512	E 3	2538	D 2	2569	F 6	2624	F 4	2668	C 10	2700	B 9	2716	F 11	B 6	3527	F 3	3580	F 4	3607	E 7	3631	D 7	3653	F 11	3677	B 8	3707	B 8	3742	D 9	3809	C 9	3826	F 6	3841	D 2
107	F 6	125	B 8	142	F 7	157	D 6	174	D 6	193	B 8	1503	D 6	2513	E 3	2539	D 2	2570	F 6	2625	F 4	2669	C 10	2701	C 6	2717	F 11	B 6	3528	F 3	3581	F 4	3608	E 7	3632	D 7	3654	F 11	3678	B 8	3708	B 8	3743	D 9	3810	B 7	3827	F 6	3842	D 2
108	F 8	126	C 7	143	F 7	158	E 8	175	E 8	194	B 8	1504	D 6	2514	E 3	2540	F 2	2571	F 6	2626	F 4	2670	C 10	2702	A 5	2718	F 11	B 6	3529	F 3	3582	F 4	3609	E 7	3633	D 7	3655	B 10	3679	B 8	3709	C 9	3744	D 9	3811	B 7	3828	D 7	3843	D 3
110	F 7	127	C 10	144	B 9	159	E 4	176	E 4	195	E 3	18	B 7	2515	E 3	2541	F 2	2572	F 6	2627	F 4	2671	C 9	2703	A 5	2719	F 11	B 6	3530	F 3	3583	F 4	3610	E 7	3634	D 7	3656	B 10	3680	B 8	3710	C 9	3745	D 9	3812	B 7	3829	F 2	3844	D 3
111	CC 7	128	C 10	145	E 9	160	E 8	177	E 8	196	B 5	2	B 11	2516	E 3	2542	F 2	2573	F 6	2628	F 4	2672	C 9	2704	A 5	2720	F 11	B 6	3531	F 3	3584	F 4	3611	E 7	3635	D 7	3657	B 10	3681	B 11	3725	F 4	3775	D 7	3813	F 2	3830	D 5	3847	D 8
112	DD 4	129	E 7	146	E 10	162	D 4	181	E 2	197	E 2	2500		2517	F 2	2543	F 2	2574	F 6	2629	F 4	2673	B 8	2705	A 5	2721	F 11	B 6	3532	F 3	3585	F 4	3612	E 7	3636	D 7	3658	B 10	3682	C 10	3726	F 4	3779	C 5	3814	F 5	3831	D 5	3848	A 7
113	DD 4	130	D 4	147	E 10	163	D 4	182	E 2	198	D 9	2501		2518	F 2	2544	F 2	2575	F 6	2630	F 4	2674	C 9	2706	A 5	2722	F 11	B 6	3533	F 3	3586	F 4	3613	E 7	3637	D 7	3659	B 10	3683	C 10	3727	F 4	3780	C 5	3815	F 5	3832	E 8	3849	A 6
114	EE 5	132	F 8	148	B 10	164	D 4	183	E 2	199	E 2	2502		2519	F 2	2545	F 2	2576	F 6	2631	F 4	2675	C 9	2707	A 5	2723	F 11	B 6	3534	F 3	3587	F 4	3614	E 7	3638	D 7	3660	B 10	3684	C 10	3728	F 4	3781	C 5	3816	F 5	3833	C 10	3849	A 6
115	F 8	133	C 7	149	B 10	165	C 8	184	E 2	201	D 7	2503		2520	F 2	2546	F 2	2577	F 6	2632	F 4	2676	C 9	2708	A 5	2724	F 11	B 6	3535	F 3	3588	F 4	3615	E 7	3639	D 7	3661	B 10	3685	C 10	3729	F 4	3782	C 5	3817	E 2	3834	F 7	3851	C 6
116	B 5	134	E 9	150	E 6	166	F 10	185	D 5	202	D 7	2504		2521	F 2	2547	F 2	2578	F 6	2633	F 4	2677	C 9	2709	A 5	2725	F 11	B 6	3536	F 3	3589	F 4	3616	E 7	3640	E 8	3662	B 10	3686	C 10	3730	F 4	3783	C 5	3818	E 2	3835	C 5	3852	C 6

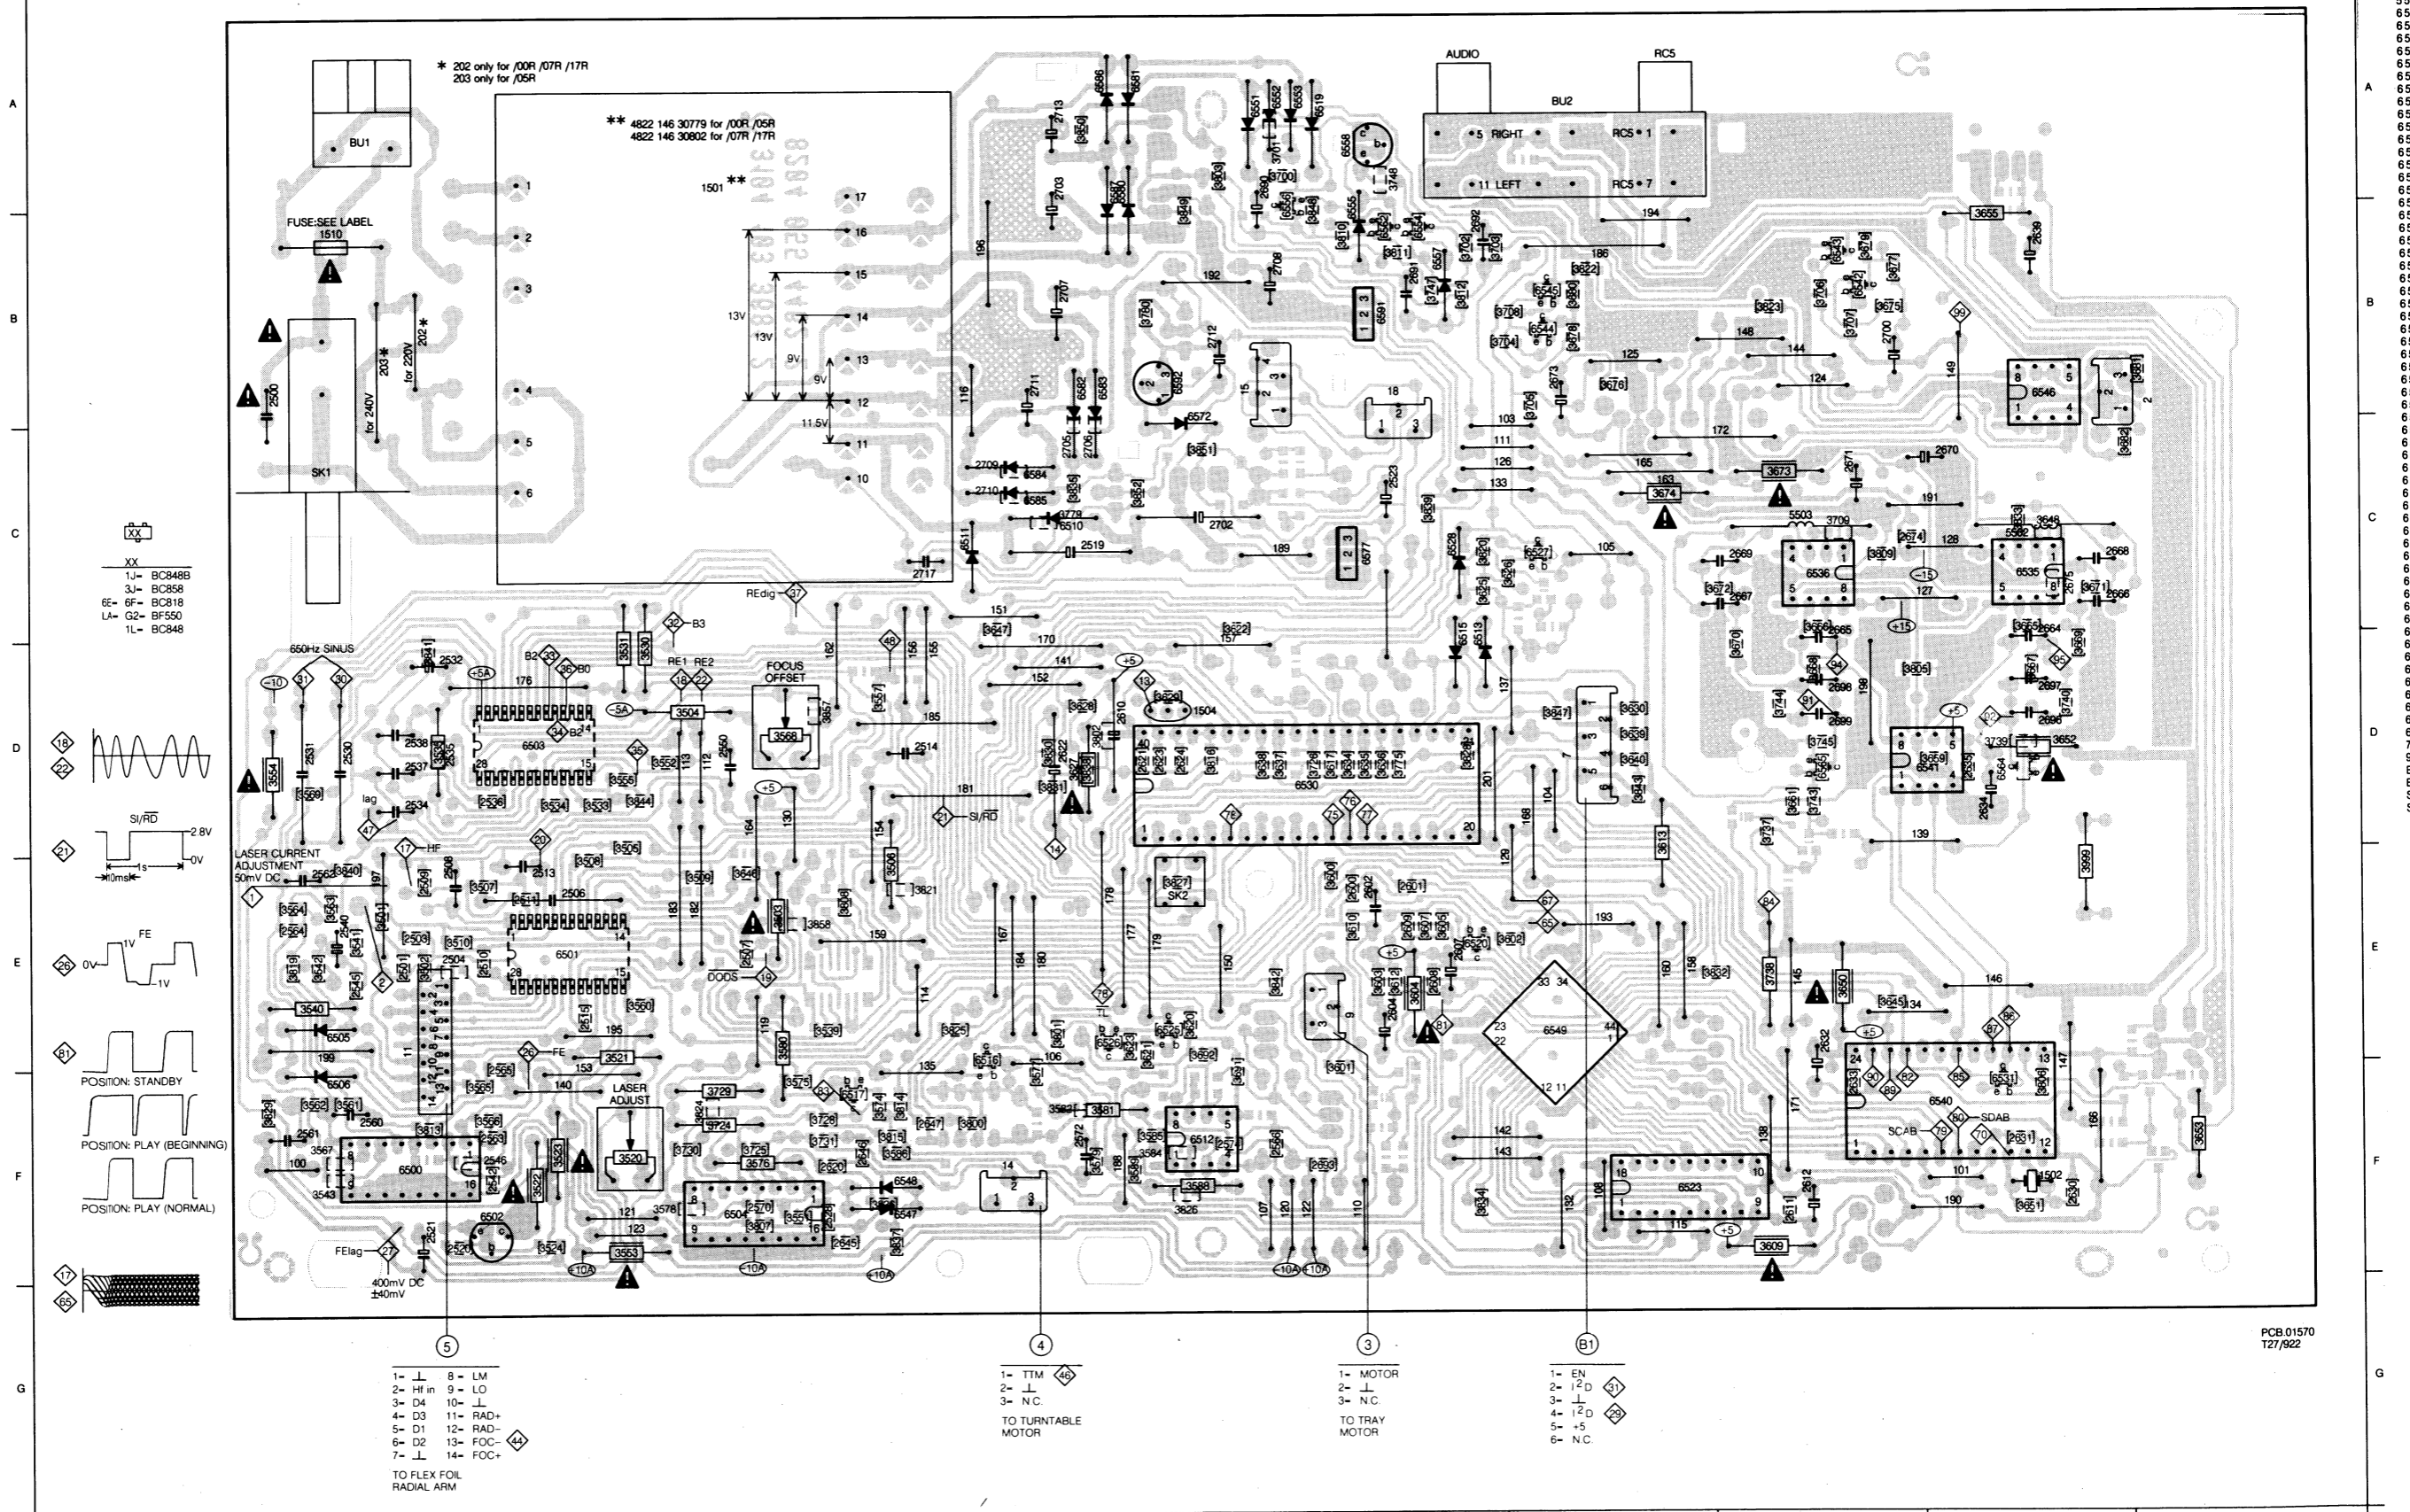


3857	D 4	3999	E 10	5502	C 10	5503	C 9	6500	F 2	6501	E 3	6502	F 3	6503	D 3	6504	F 4	6505	E 2	6506	E 2	6510	C 5	6511	C 5	6512	F 6	6513	CC 7	6515	E 5	6516	E 5	6517	F 4	6519	A 7	6520	E 7	6523	F 8	6525	E 6	6526	E 6	6527	C 8	6528	C 7	6530	D 7	6531	F 10	6535	C 9	6536	C 9	6540	F 10	6541	D 10	6542	B 9	6543	B 9	6544	B 8	6545	B 8	6546	B 10	6547	F 5	6548	F 5	6549	E 8	6551	A 6	6552	A 6	6553	A 6	6554	B 7	6555	A 7	6556	A 6	6557	B 7	6558	A 7	6562	B 7	6564	D 10	6565	D 9	6572	B 6	6577	C 7	6580	A 6	6581	A 6	6582	B 5	6583	B 6	6584	C 5	6585	C 5	6586	A 6	6587	A 6	6591	B 7	6592	B 6	6593	D 8	7	9	BU1	A 2	BU2	A 8	SK1	C 2	SK2	E 6
------	-----	------	------	------	------	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	------	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	------	------	-----	------	-----	------	------	------	------	------	-----	------	-----	------	-----	------	-----	------	------	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	------	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	------	-----	---	---	-----	-----	-----	-----	-----	-----	-----	-----

PCB.01570
127/922

100	F	2	116	B	5	133	C	7	148	B	9	163	C	8	181	D	5	196	B	5	18	B	7	2515	E	3	2540	F	2	2574	F	6	2623	D	6	2666	C	10	2697	D	10	2713	A	5	3522	F	3	3552	D	3	3569	D	2	3589	F	6	3621	E	6	3639	D	8	3666	C	9	3680	B	8	3709	C	9	3745	D	9	3809	C	9	3825	E	5
101	F	10	119	B	4	134	E	9	149	B	10	164	D	4	182	D	5	197	B	2	18	B	11	2519	F	3	2542	F	3	2574	F	7	2623	D	7	2666	C	9	2697	D	11	2713	A	6	3522	F	4	3552	D	4	3569	D	3	3589	F	7	3621	E	7	3639	D	9	3666	C	10	3680	B	9	3709	C	10	3745	D	10	3809	C	10	3825	E	6
102	F	11	120	B	5	135	F	10	150	B	11	165	E	5	183	E	6	198	B	3	19	B	12	2520	F	4	2543	F	4	2574	F	8	2623	D	8	2666	C	10	2697	D	12	2713	A	7	3522	F	5	3552	D	5	3569	D	4	3589	F	8	3621	E	8	3639	D	10	3666	C	11	3680	B	10	3709	C	11	3745	D	11	3809	C	11	3825	E	7
103	D	8	121	F	3	136	D	9	151	C	5	166	F	10	184	F	11	199	B	4	20	B	13	2521	F	5	2544	F	5	2574	F	9	2623	D	9	2666	C	11	2697	D	13	2713	A	8	3522	F	6	3552	D	6	3569	D	5	3589	F	9	3621	E	9	3639	D	11	3666	C	12	3680	B	11	3709	C	12	3745	D	12	3809	C	12	3825	E	8
104	D	9	122	F	4	137	E	10	152	D	6	167	F	11	190	F	12	205	B	5	21	B	14	2522	F	6	2545	F	6	2574	F	10	2623	D	10	2666	C	12	2697	D	14	2713	A	9	3522	F	7	3552	D	7	3569	D	6	3589	F	10	3621	E	10	3639	D	12	3666	C	13	3680	B	12	3709	C	13	3745	D	13	3809	C	13	3825	E	9
105	C	8	123	F	5	138	F	11	153	E	7	168	F	12	191	F	13	206	B	6	22	B	15	2523	F	7	2546	F	7	2574	F	11	2623	D	11	2666	C	13	2697	D	15	2713	A	10	3522	F	8	3552	D	8	3569	D	7	3589	F	11	3621	E	11	3639	D	13	3666	C	14	3680	B	13	3709	C	14	3745	D	14	3809	C	14	3825	E	10
106	E	5	124	B	9	139	D	10	154	D	7	169	D	5	192	B	7	207	B	7	23	B	16	2524	F	8	2547	F	8	2574	F	12	2623	D	12	2666	C	14	2697	D	16	2713	A	11	3522	F	9	3552	D	9	3569	D	8	3589	F	12	3621	E	12	3639	D	14	3666	C	15	3680	B	14	3709	C	15	3745	D	15	3809	C	15	3825	E	11
107	F	8	125	B	10	140	D	11	155	D	8	170	D	6	193	B	8	208	B	8	24	B	17	2525	F	9	2548	F	9	2574	F	13	2623	D	13	2666	C	15	2697	D	17	2713	A	12	3522	F	10	3552	D	10	3569	D	9	3589	F	13	3621	E	13	3639	D	15	3666	C	16	3680	B	15	3709	C	16	3745	D	16	3809	C	16	3825	E	12
108	F	9	126	B	11	141	F	12	156	D	9	171	F	13	194	B	9	209	B	9	25	B	18	2526	F	10	2549	F	10	2574	F	14	2623	D	14	2666	C	16	2697	D	18	2713	A	13	3522	F	11	3552	D	11	3569	D	10	3589	F	14	3621	E	14	3639	D	16	3666	C	17	3680	B	16	3709	C	17	3745	D	17	3809	C	17	3825	E	13
109	F	10	127	C	7	142	F	13	157	D	10	172	F	14	195	B	10	210	B	10	26	B	19	2527	F	11	2550	F	11	2574	F	15	2623	D	15	2666	C	17	2697	D	19	2713	A	14	3522	F	12	3552	D	12	3569	D	11	3589	F	15	3621	E	15	3639	D	17	3666	C	18	3680	B	17	3709	C	18	3745	D	18	3809	C	18	3825	E	14
110	C	7	128	C	8	143	F	14	158	D	11	173	F	15	196	B	11	211	B	11	27	B	20	2528	F	12	2551	F	12	2574	F	16	2623	D	16	2666	C	18	2697	D	20	2713	A	15	3522	F	13	3552	D	13	3569	D	12	3589	F	16	3621	E	16	3639	D	18	3666	C	19	3680	B	18	3709	C	19	3745	D	19	3809	C	19	3825	E	15
111	D	4	129	C	9	144	B	9	159	E	8	174	F	16	197	B	12	212	B	12	28	B	21	2529	F	13	2552	F	13	2574	F	17	2623	D	17	2666	C	19	2697	D	21	2713	A	16	3522	F	14	3552	D	14	3569	D	13	3589	F	17	3621	E	17	3639	D	19	3666	C	20	3680	B	19	3709	C	20	3745	D	20	3809	C	20	3825	E	16
112	D	5	130	E	7	145	E	9	160	E	9	175	F	17	198	B	13	213	B	13	29	B	22	2530	F	14	2553	F	14	2574	F	18	2623	D	18	2666	C	20	2697	D	22	2713	A	17	3522	F	15	3552	D	15	3569	D	14	3589	F	18	3621	E	18	3639	D	20	3666	C	21	3680	B	20	3709	C	21	3745	D	21	3809	C	21	3825	E	17
113	D	6	131	F	8	146	F	10	161	F	10	176	F	18	199	B	14	214	B	14	30	B	23	2531	F	15	2554	F	15	2574	F	19	2623	D	19	2666	C	21	2697	D	23	2713	A	18	3522	F	16	3552	D	16	3569	D	15	3589	F	19	3621	E	19	3639	D	21	3666	C	22	3680	B	21	3709	C	22	3745	D	22	3809	C	22	3825	E	18
114	E	5	132	F	9	147	F	11	162	D	11	177	F	19	200	B	15	215	B	15	31	B	24	2532	F	16	2555	F	16	2574	F	20	2623	D	20	2666	C	22	2697	D	24	2713	A	19	3522	F	17	3552	D	17	3569	D	16	3589	F	20	3621	E	20	3639	D	22	3666	C	23	3680	B	22	3709	C	23	3745	D	23	3809	C	23	3825	E	19
115	F	8	132	F	10	147	F	12	162	D	12	177	F	20	201	B	16	216	B	16	32	B	25	2533	F	17	2556	F	17	2574	F	21	2623	D	21	2666	C	23	2697	D	25	2713	A	20	3522	F	18	3552	D	18	3569	D	17	3589	F	21	3621	E	21	3639	D	23	3666	C	24	3680	B	23	3709	C	24	3745	D	24	3809	C	24	3825	E	20

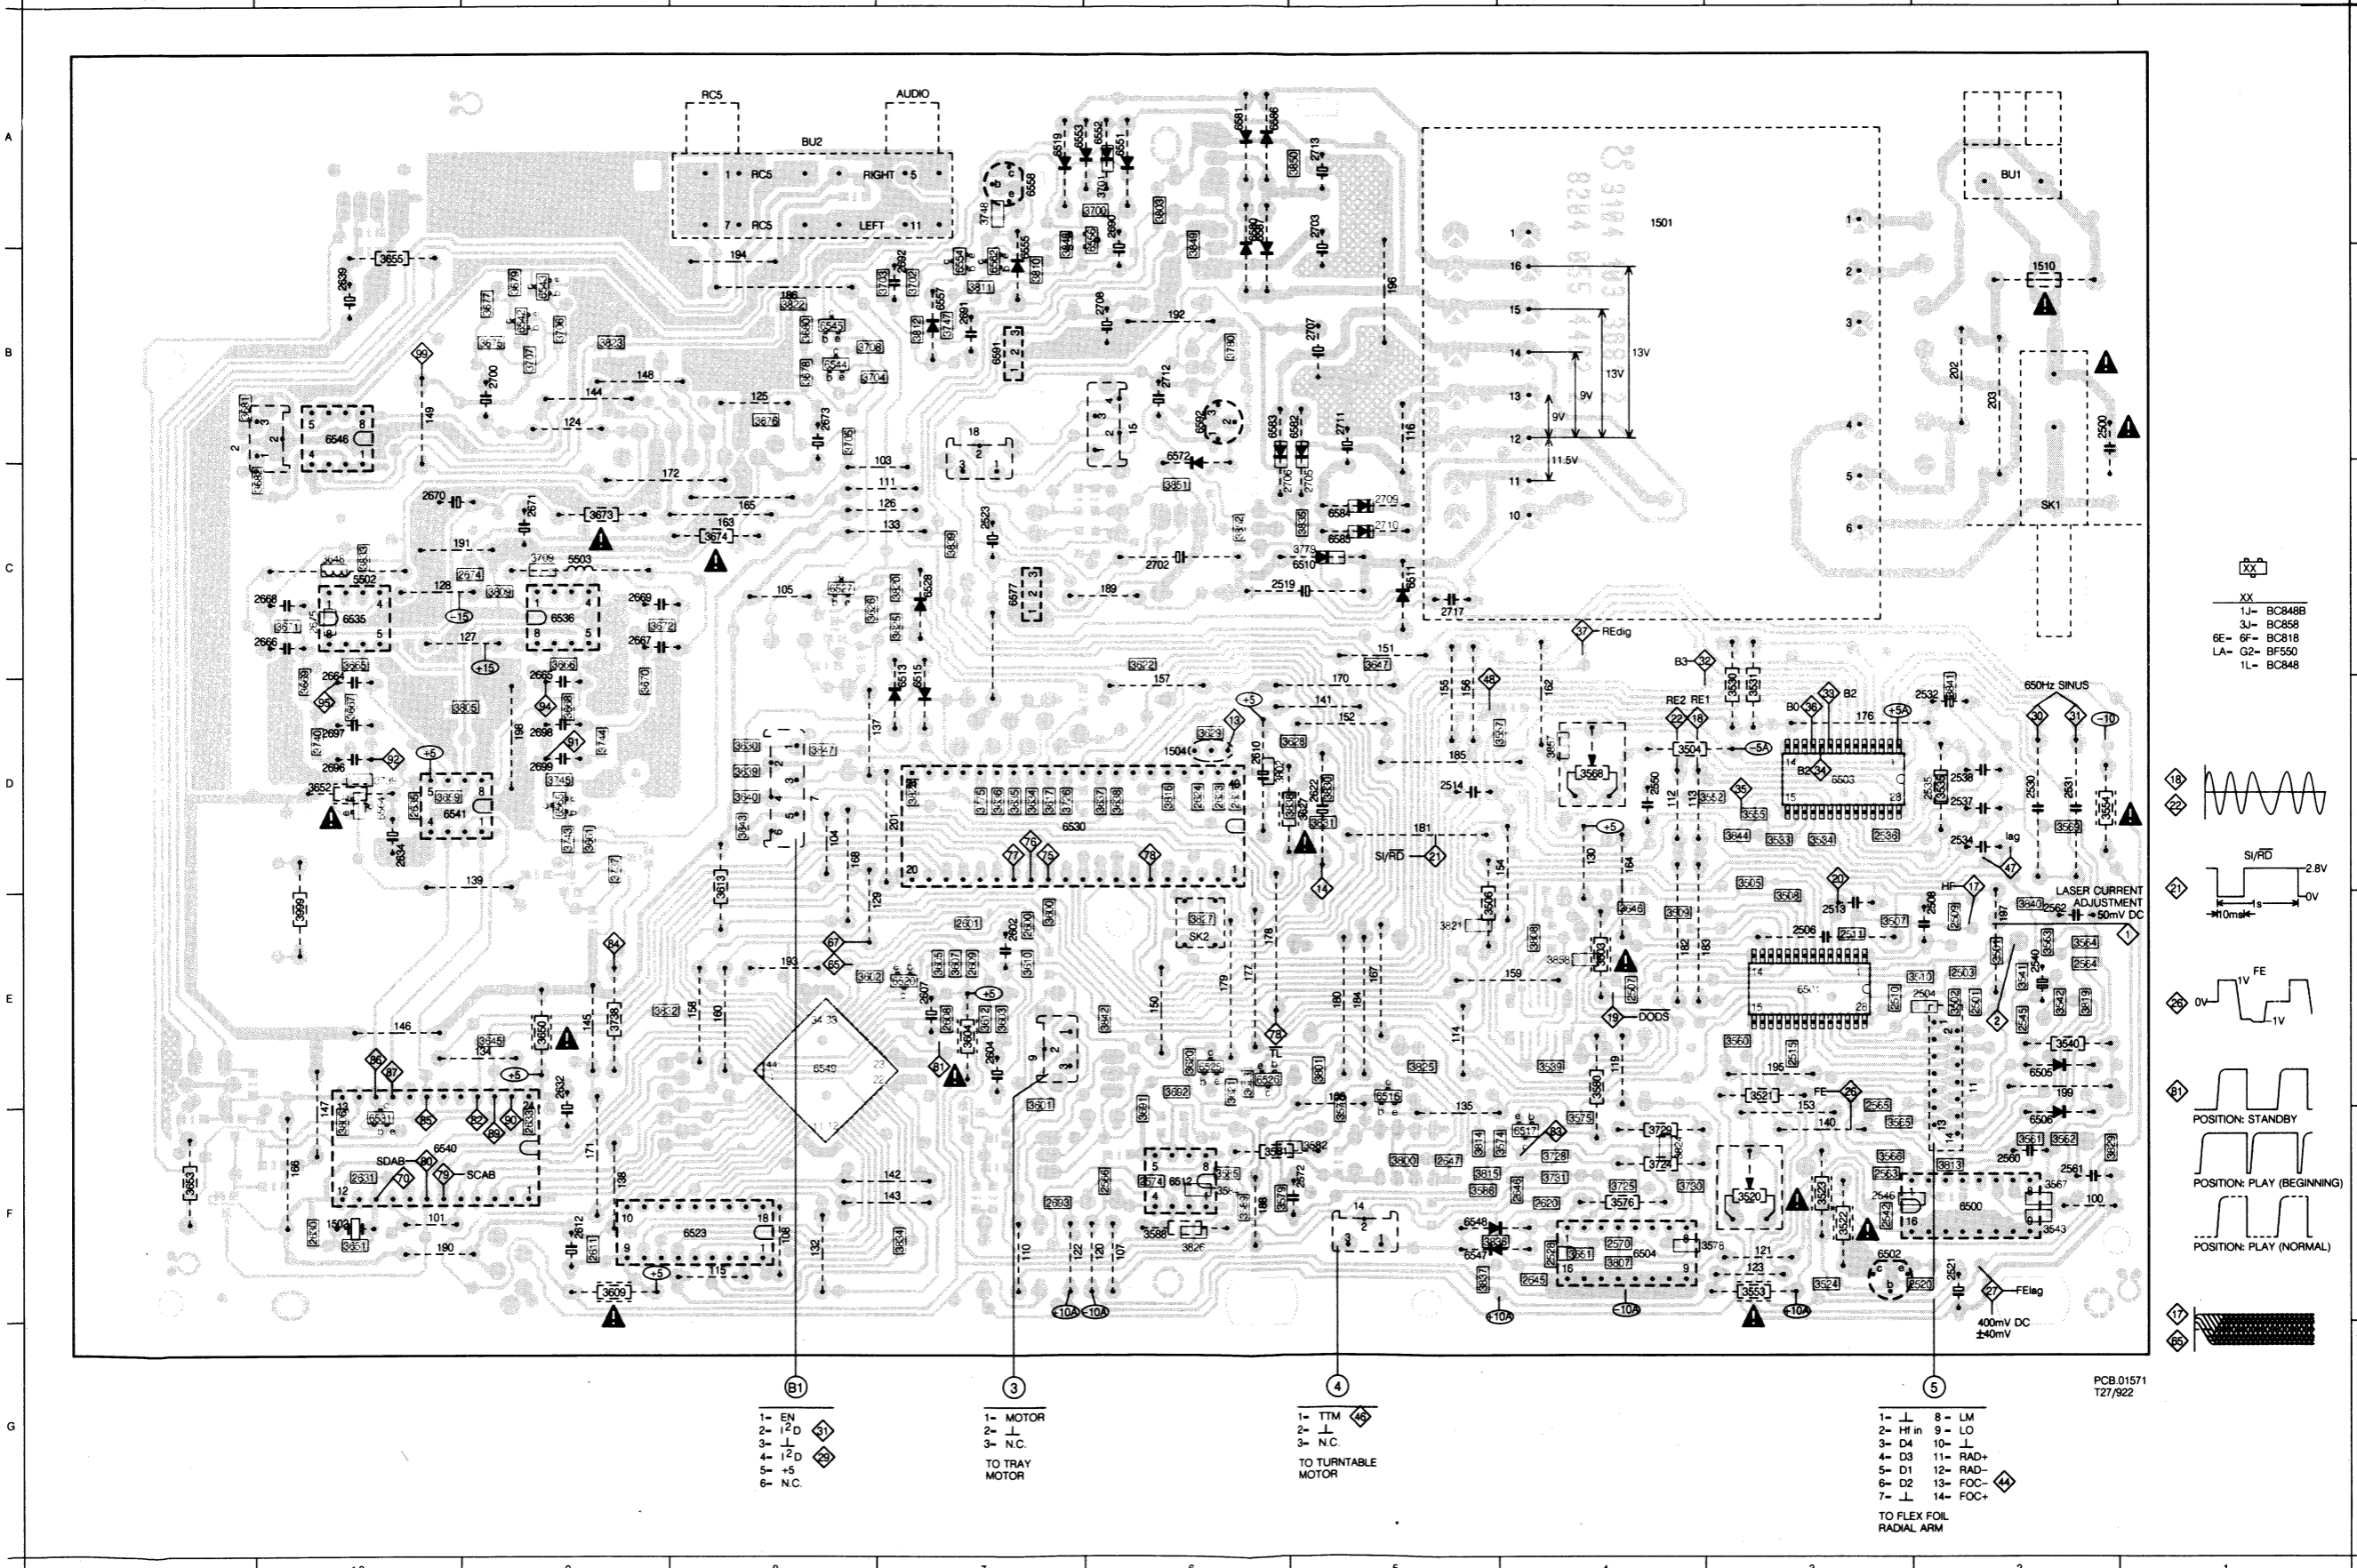

BLOCK DIAGRAM


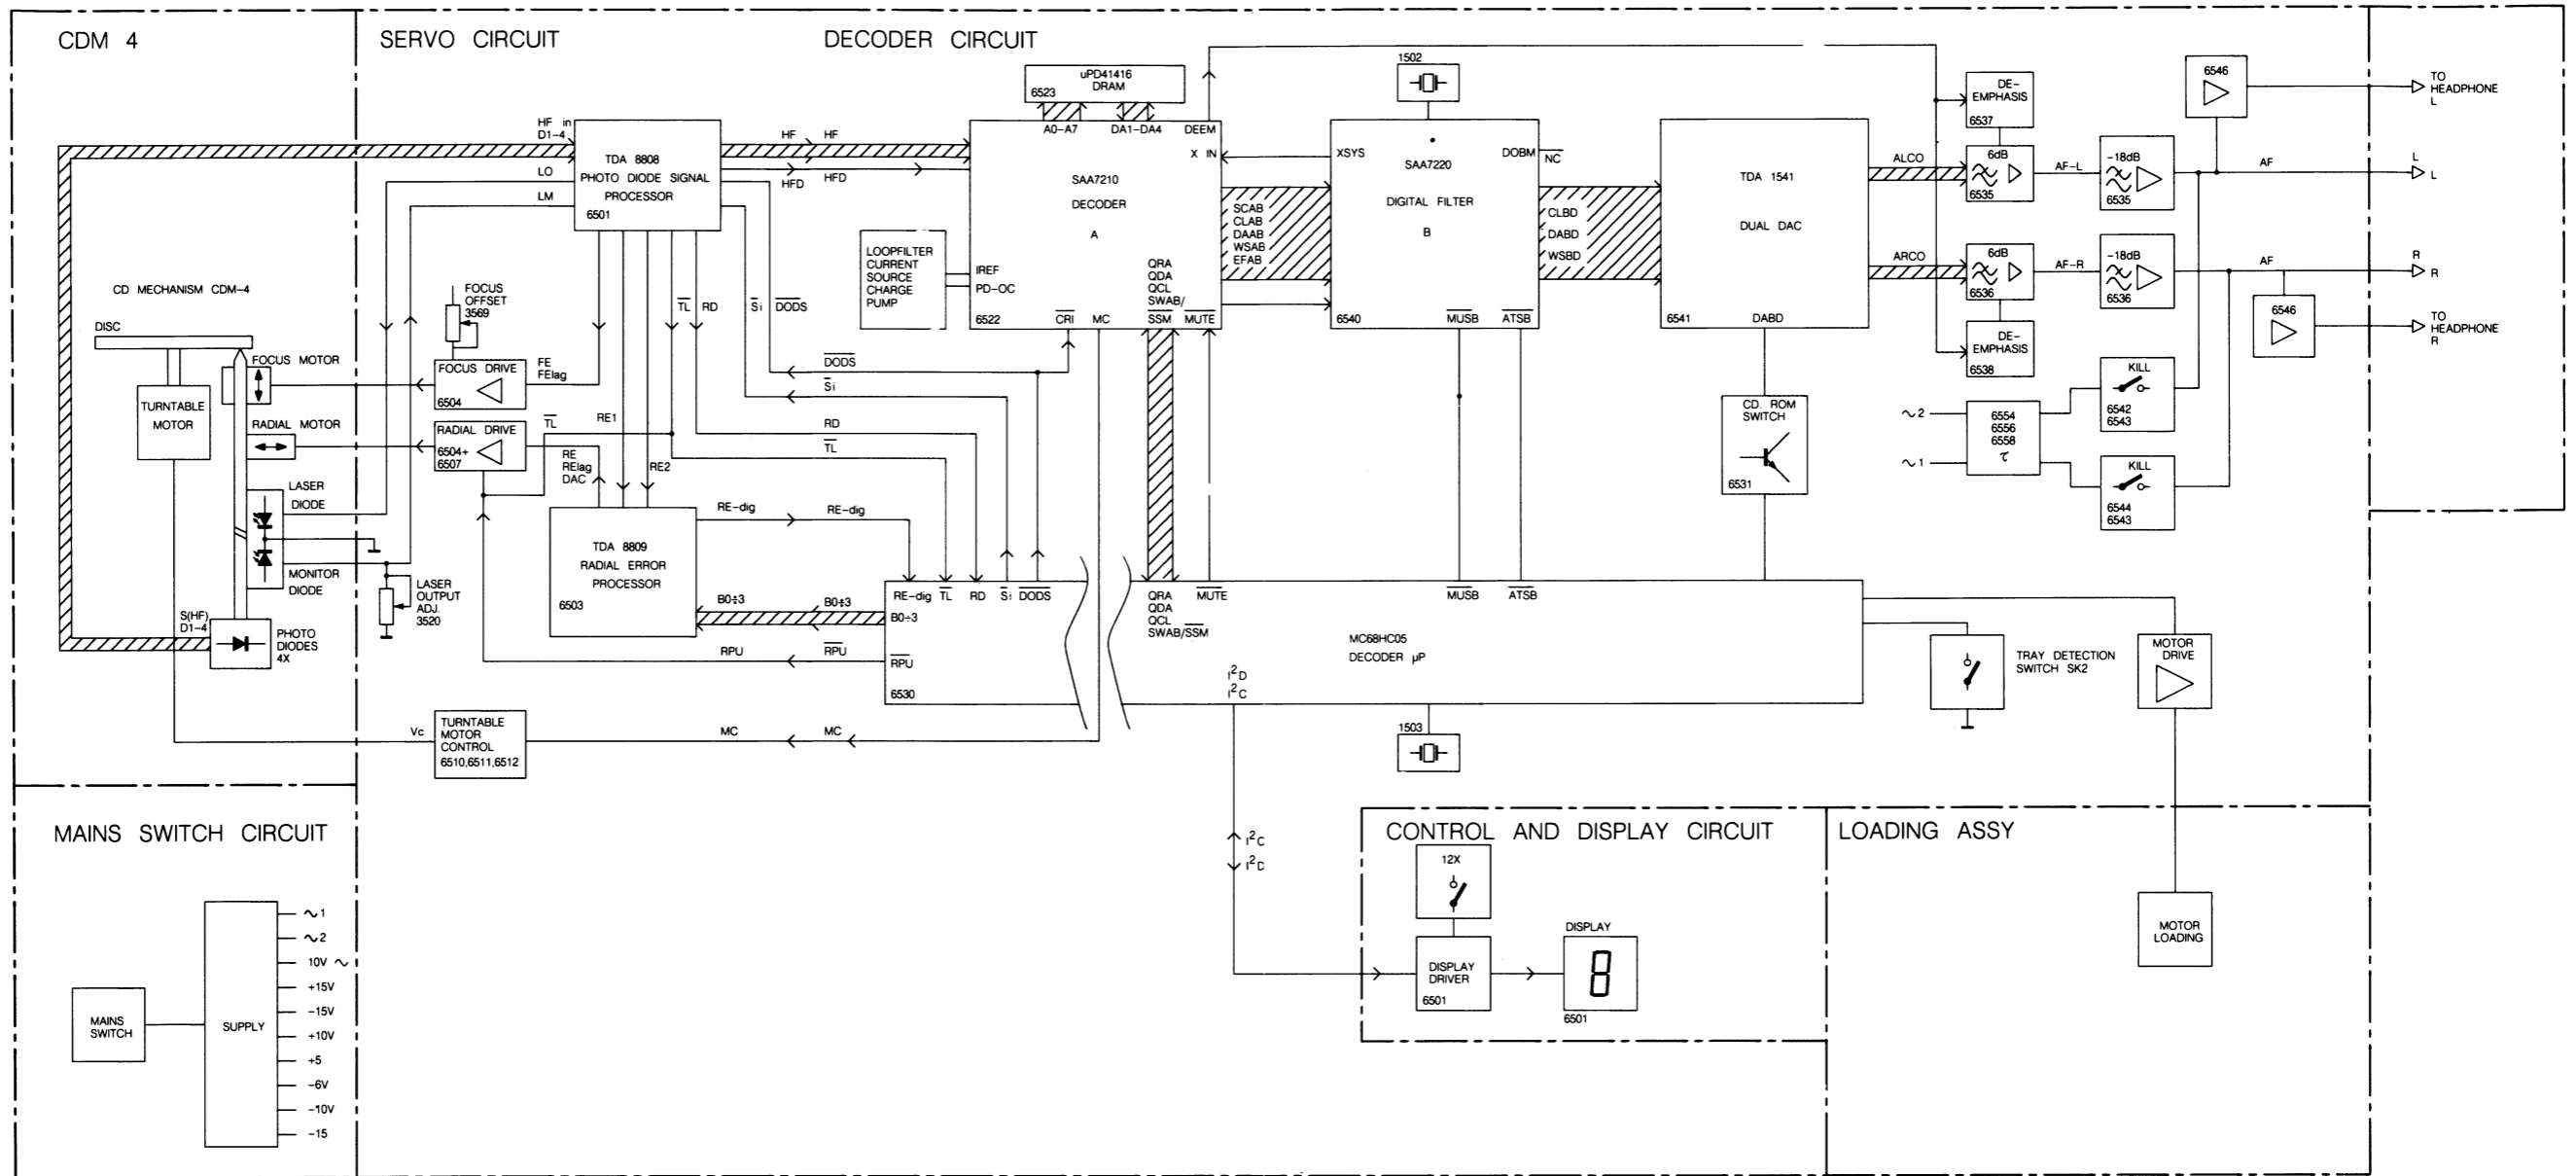


PRS 05151
T02-823

- | | | | | | | | |
|------------|---|--------|---|---------------|--|----------|--|
| AGC | - Automatic Gain Control | Rosc | - Resistor wobble oscillator | ATSB | - Attenuation of Audio level in Search position (Cueing) | MUSB | - Soft Mute signal |
| B0-B3 | - Control bits for radial circuit | Rwob | - Wobble generator input | CD ROM Switch | - Digital Data information on disc signal | PD/OC | - Phase detector - oscillator control |
| BEQ | - Equalizer reference current input | RE1 | - Radial error signal 1 (summation of amplified currents D ₃ and D ₄) | CEFM | - Clock Eight-to-Fourteen Modulator | QCL | - Q-channel Clock signal |
| BGC | - DC and LF gain control reference input | RE2 | - Radial error signal 2 (summation of amplified currents D ₁ and D ₂) | CLAB | - Clock signal Decoder-A to Filter-B | QDA | - Q-channel Data signal |
| Cosc1 | - Capacitor wobble oscillator | RE dig | - Radial error digital | CLBD | - Clock signal Filter-B to DAC | QRA | - Q-channel Request Acknowledge |
| Cosc2 | - Capacitor wobble oscillator | RE lag | - Radial error signal for LAG network | CREF | - Reference Current | SCAB | - Subcode clock Decoder-A to Filter-B |
| DEC | - Decoupling input of inkruat bypass | Sc | - Starting up capacitor input | CRI | - Counter Reset Inhibit | SDAB | - Subcode data Decoder-A to Filter-B |
| DET | - HF detector voltage input | Si/RD | - On/off control for laser supply and focus circuit. Ready signal, Starting up procedure succesful. | DAAB | - Data signal Decoder-A to Filter-B | SWAB/SSM | - Subcode Word/Start-stop motor signal |
| DIV4 | - Divide by 4 input | TL | - Track loss output signal | DABD | - Data signal Filter-B to DAC | WSAB | - Word select Decoder-A to Filter-B |
| DODS | - Drop out detector suppression | TTM- | - Control voltage for turntable motor | DEEM | - Deemphasis | WSBD | - Word Select Filter-B to DAC |
| D1+4 | - Photodiode currents | TTM+ | - Control voltage for turntable motor | DOBM | - Digital out signal | XIN | - Oscillator signal in Decoder-A |
| FE | - Focus error signal | Vext- | - Supply connection | EFAB | - Error flag Decoder-A to Filter-B | XSYS | - Oscillator signal out Filter-B |
| FE lag | - Focus error signal for LAG network | Vext+ | - Supply connection | MUTE | - Mute signal | | |
| HF | - HF output for DEMOD | TCMP | - Turntable control motor pulse | | | | |
| HFD | - HF detector output for DEMOD | | | | | | |
| HF-in | - HF current input to HF amplifier | | | | | | |
| HF-out | - HF amplifier and equalizer voltage output | | | | | | |
| LM | - Laser monitor diode input | | | | | | |
| LO | - Laser amplifier current output | | | | | | |
| MC | - Motor control signal | | | | | | |
| offset IN | - Offset control input | | | | | | |
| offset OUT | - Offset control output | | | | | | |
| PLLH | - PLL on hold output | | | | | | |
| RADout | - output of RE2-RE1 input | | | | | | |
| RE | - Radial error signal (Amplified RE ₂ -RE ₁ currents) | | | | | | |


1502 K15	2604 H 3	2611 L 4	2632 K19	2664 F24	2668 F28	2673 H30	2691 E27	2698 I 27	3602 D 3	3607 F 2	3613 B 9	3652 F21	3666 I 24	3670 H27	3674 F29	3678 H30	3682 G32	3703 E25	3707 F30	3737 C23	3743 I 25	3748 C27	3811 C29	3826
2600 D 2	2607 K 2	2612 L 4	2633 K18	2665 I 24	2669 H28	2674 F29	2692 E26	2699 I 26	3603 G 3	3609 K 4	3648 F28	3659 H23	3667 E26	3671 E27	3675 F30	3679 E31	3700 C27	3704 J30	3708 I 30	3738 D22	3744 H26	3776 F25	3812 D26	3832
2601 C 2	2608 K 2	2630 K14	2634 F21	2666 F27	2670 H24	2675 H24	2696 F26	2700 E30	3604 J 2	3610 F 2	3650 K19	3661 D25	3668 H26	3672 H27	3676 I 30	3680 H31	3701 D25	3705 C29	3709 I 28	3739 F27	3745 I 27	3809 H28	3822 H32	3833
2602 E 3	2609 F 1	2631 K15	2635 F21	2667 I 27	2671 G29	2690 C27	2697 F27	3600 C 2	3605 F 3	3612 H 2	3651 K15	3665 F24	3669 E27	3673 G24	3677 E30	3681 F32	3702 D26	3706 G30	3736 C24	3740 F26	3747 D29	3810 C28	3823 H32	3835

SERVO DECODER 2

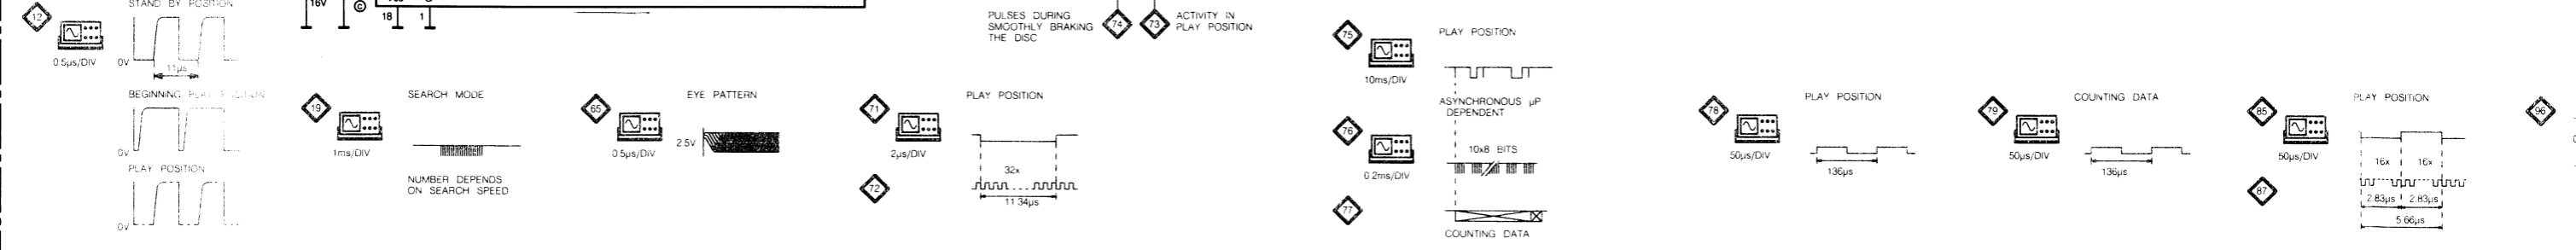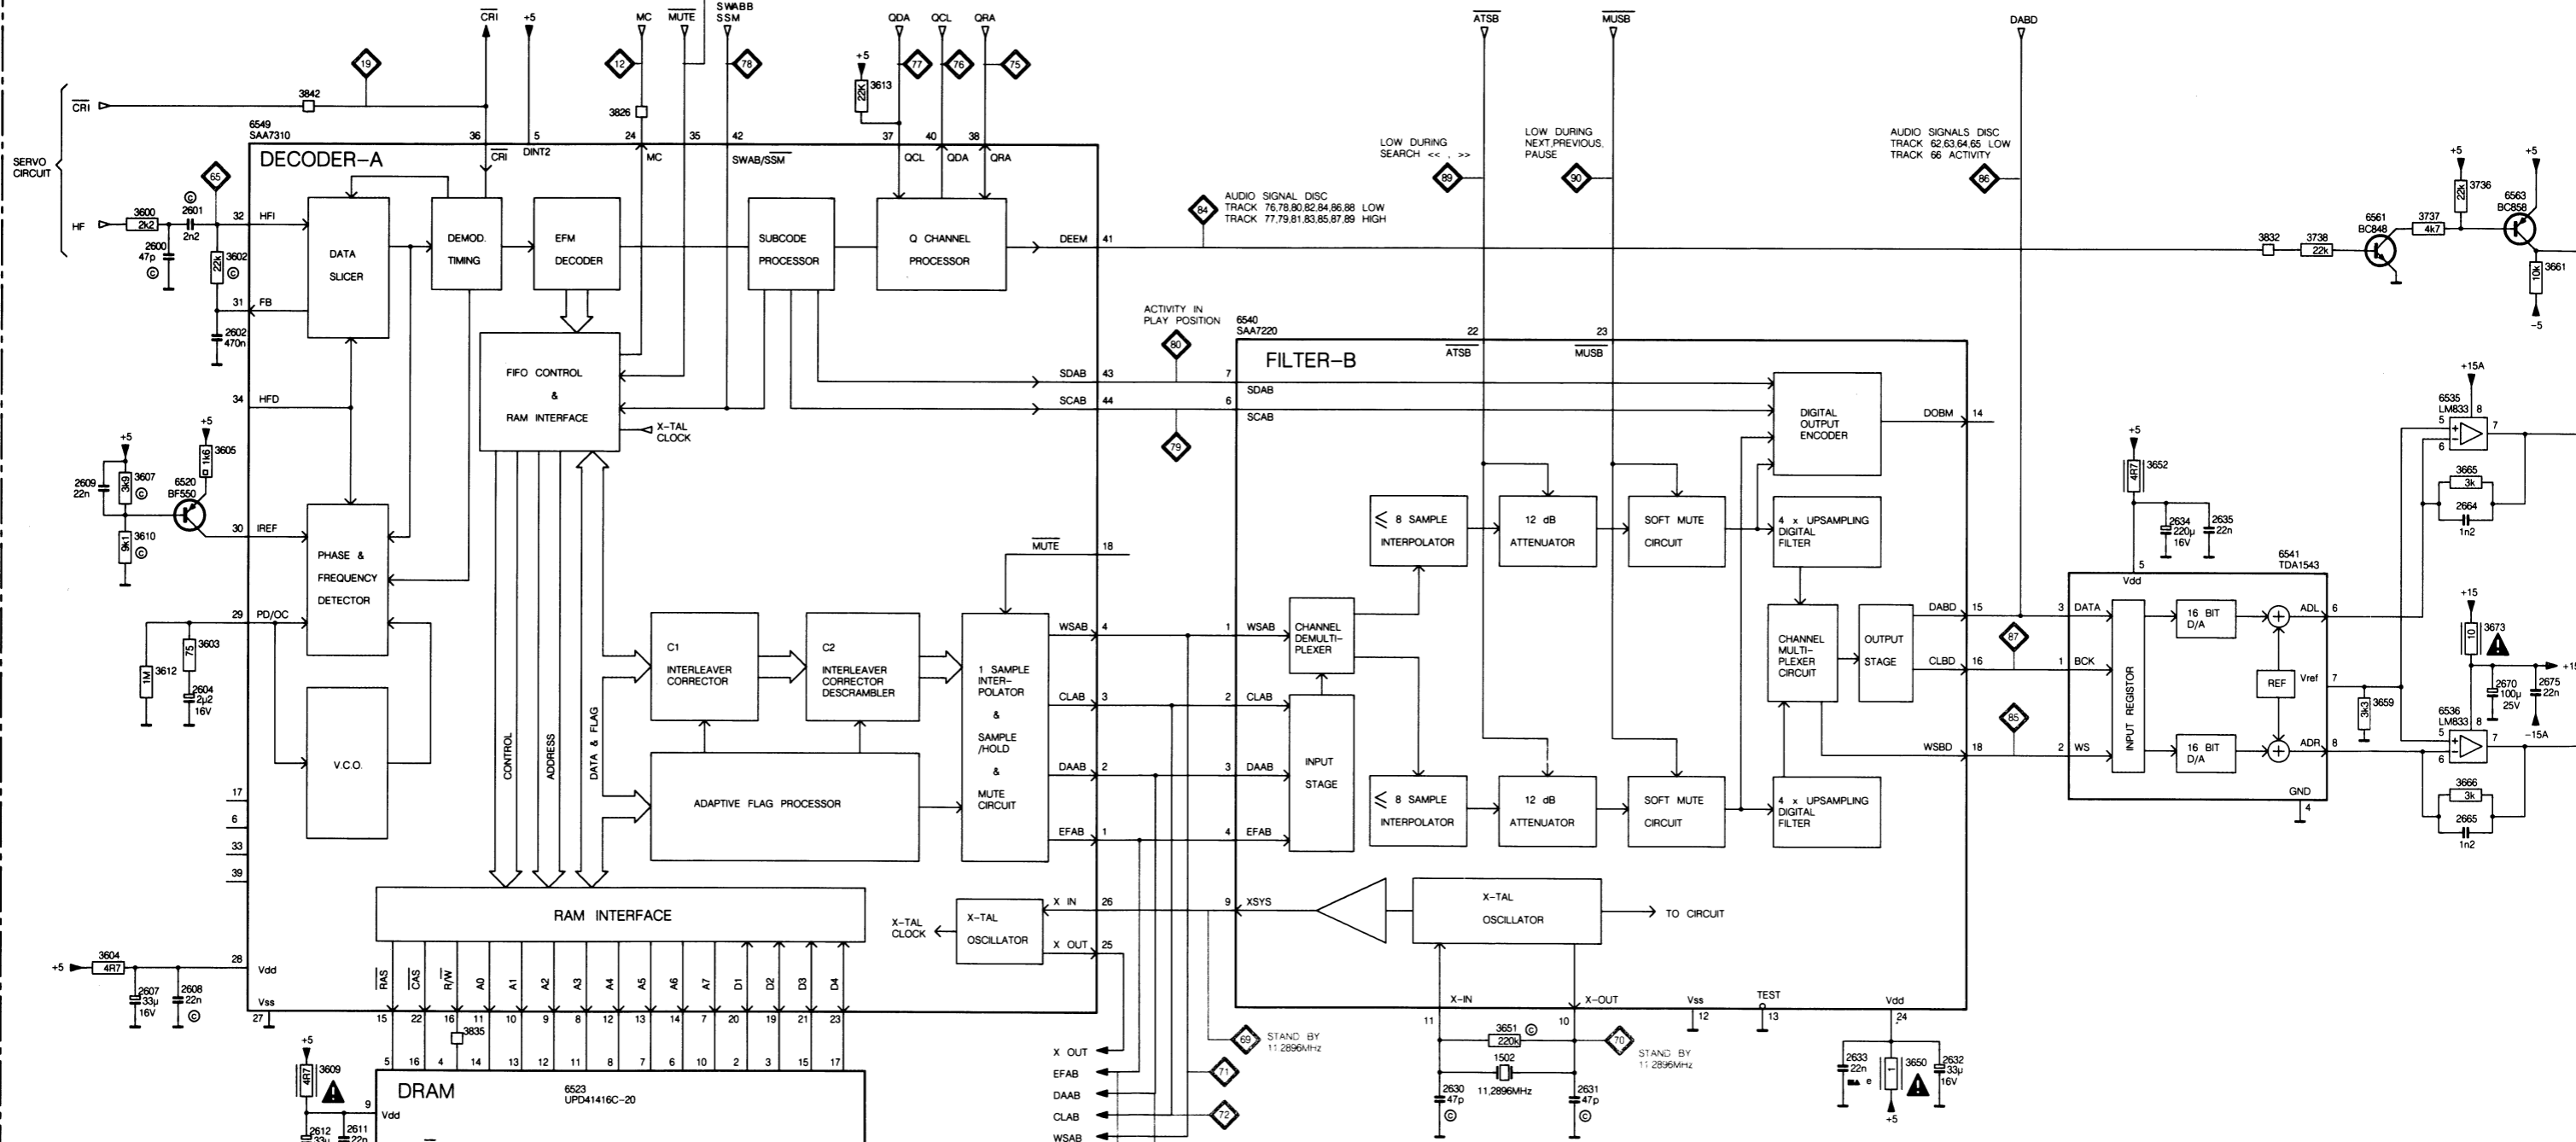


27	3602	D 3	3607	F 2	3613	B 9	3652	F21	3666	I 24	3670	H27	3674	F29	3678	H30	3682	G32	3703	E25	3707	F30	3737	C23	3743	I 25	3748	C27	3811	C29	3826	B 6	3842	B 3	6519	B26	6535	E24	6541	G22	6545	I 30	6551	B27	6557	D26	6563	C24
26	3603	G 3	3609	K 4	3648	F28	3659	H23	3667	E26	3671	E27	3675	F30	3679	E31	3700	C27	3704	J30	3708	I 30	3738	D22	3744	H26	3776	F25	3812	D26	3832	D22	3848	D27	6520	F 2	6536	H28	6542	F30	6546	F32	6553	B25	6558	C27	6564	F26
30	3604	J 2	3610	F 2	3650	K19	3661	D25	3668	H26	3672	H27	3676	I 30	3680	H31	3701	D26	3705	C29	3709	I 28	3739	F27	3745	I 27	3809	H28	3833	E28	5502	F27	6523	K 6	6536	H24	6543	G31	6546	G32	6554	C29	6561	C23	6565	I 26		
C 2	3605	F 3	3612	H 2	3651	K15	3665	F24	3669	E27	3673	G24	3677	E30	3681	F32	3702	D26	3706	G30	3736	C24	3740	F26	3747	D29	3810	C28	3823	H32	3835	K 5	5503	I 27	6535	E28	6540	D12	6544	J31	6549	C 3	6555	D28	6562	C28	6562	B26

9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33
---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

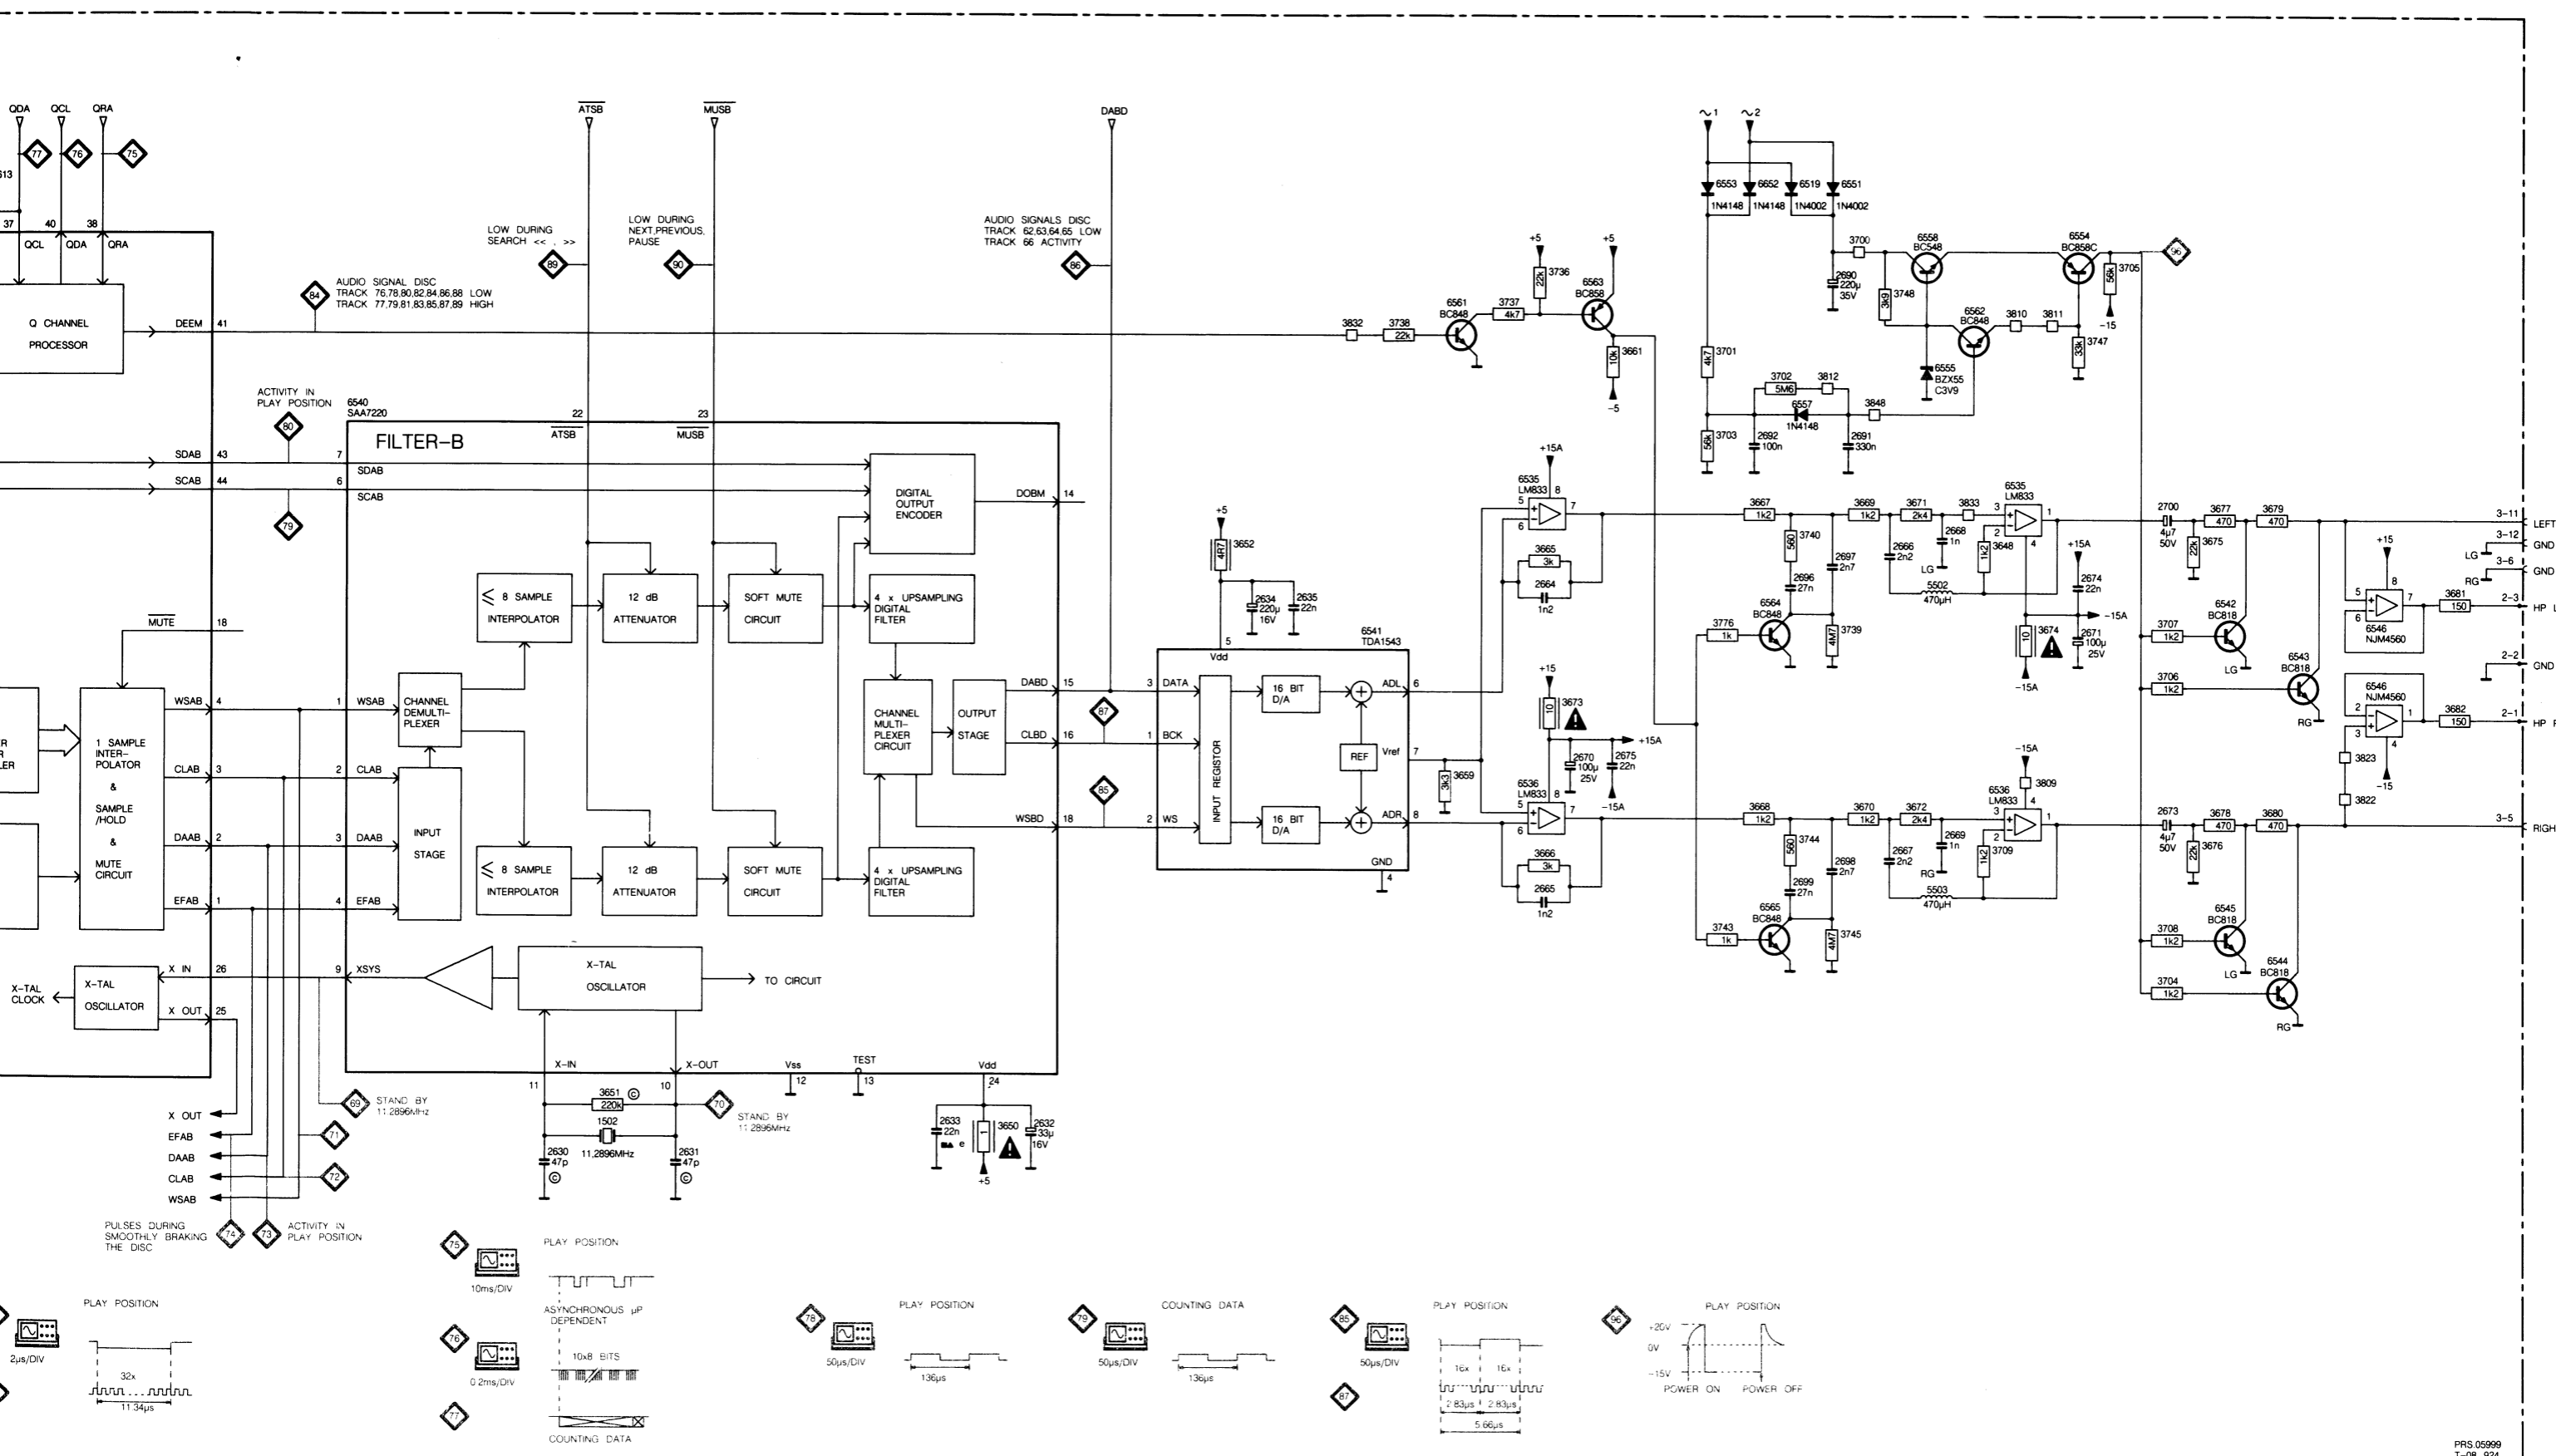



PRS 05999 T-08 924

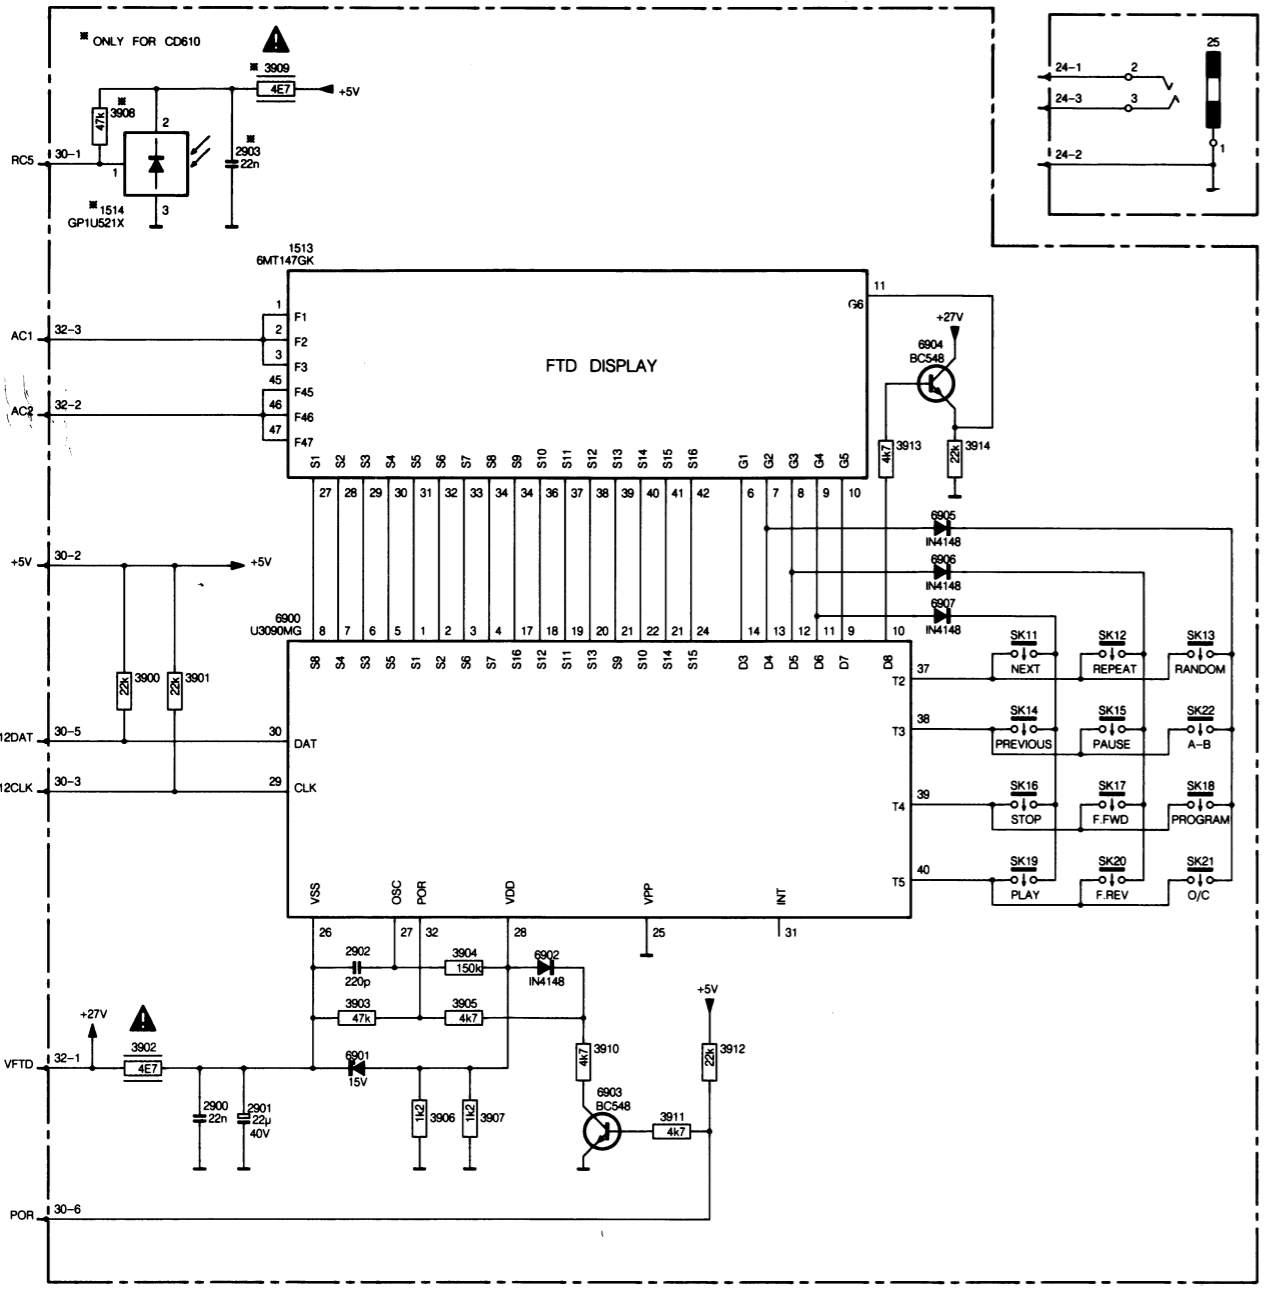



PRS.06005
T06-923

100	B 3	103	C 6	106	C 4	109	C 3	112	C 2	115	B 6	24	C10	2901	B 2	30	C 5	3901	C 3	3904	B 4	3907	B 4	3910	C 3	3913	B 5	3916	C 4	6902	B 5
101	B 3	104	B 5	107	C 6	110	C 4	113	C 4	1513	A 3	25	C10	2902	C 4	32	C 4	3902	C 2	3905	B 5	3908	B 7	3911	C 2	3914	A 7	6900	B 3	6903	C 3
102	B 3	105	B 6	108	C 3	111	C 6	114	B 5	1514	B 7	2900	B 2	2903	B 7	3900	C 3	3903	B 5	3906	B 4	3909	C 6	3912	C 3	3915	C 2	6901	C 3	6904	A 6

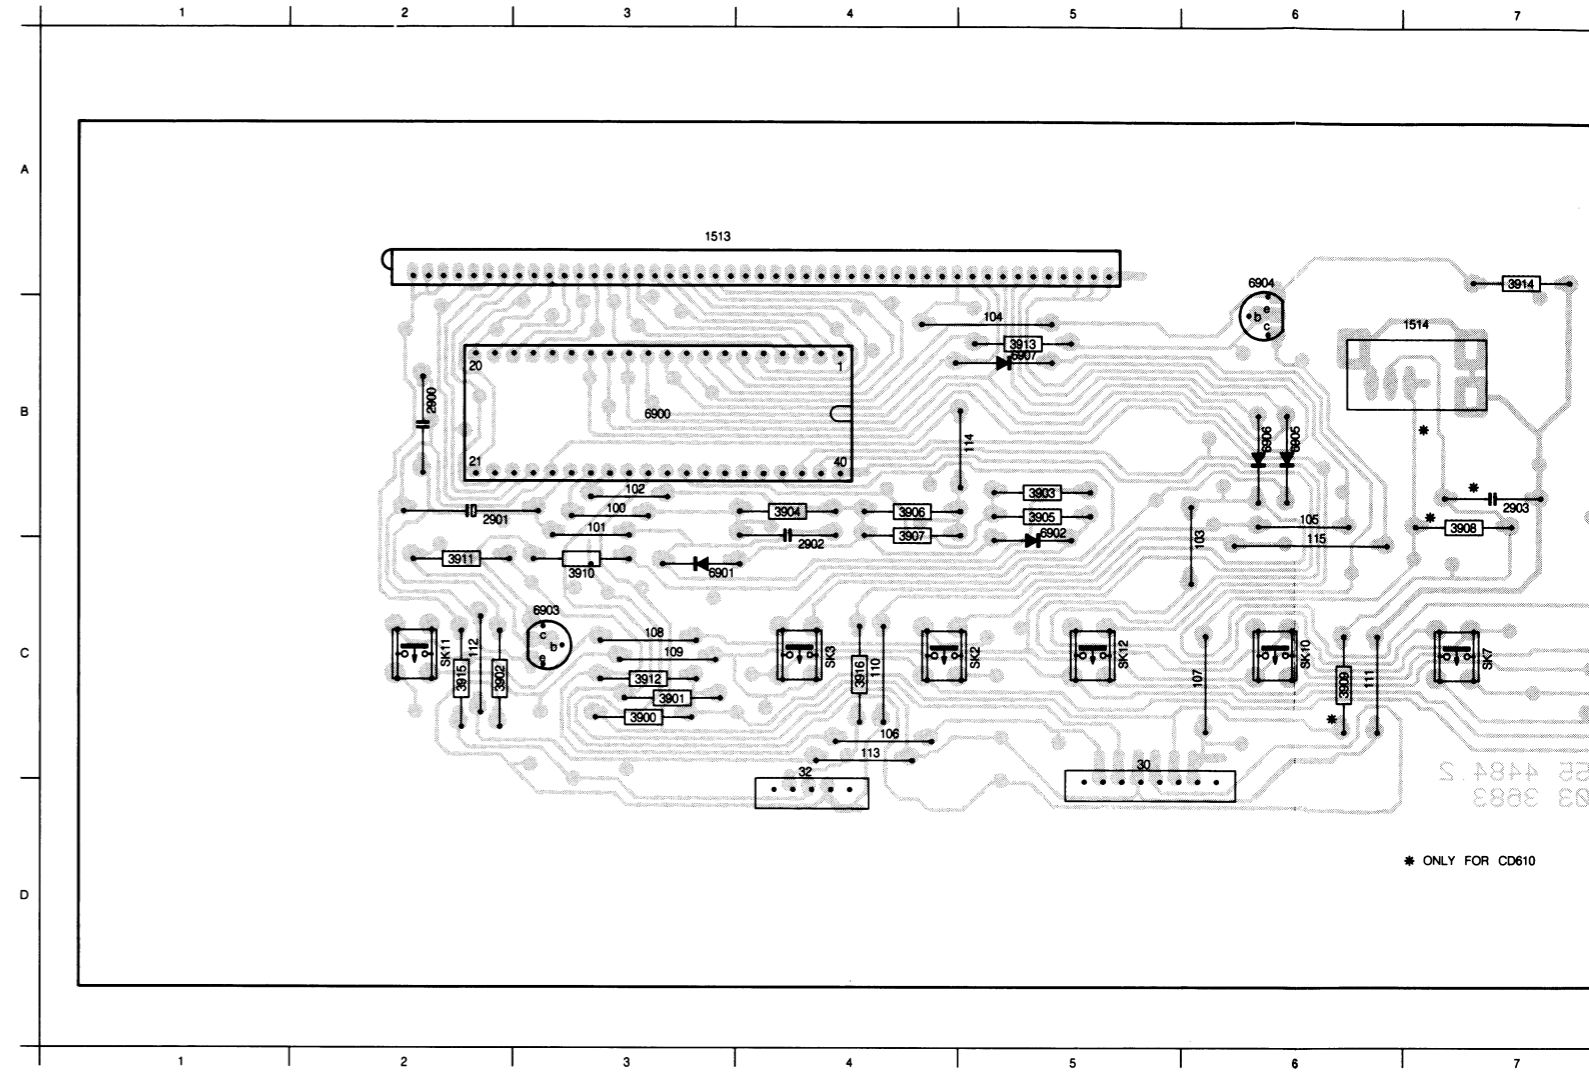




100	B 3	103	C 6	106	C 4	109	C 3	112	C 2	115	B 6	24	C10	2901	B 2	30	C 5	3901	C 3	3904	B 4	3907	B 4	3910	C 3	3913	B 5	3916	C 4	6902	B 5	6905	B 6	SK1	B10	SK12	C 5	SK4	B 8	SK7	C 7
101	B 3	104	B 5	107	C 6	110	C 4	113	C 4	1513	A 3	25	C10	2902	C 4	32	C 4	3902	C 2	3905	B 5	3908	B 7	3911	C 2	3914	A 7	6900	B 3	6903	C 3	6906	B 6	SK10	C 6	SK2	C 5	SK5	C 8	SK8	C10
102	B 3	105	B 6	108	C 3	111	C 6	114	B 5	1514	B 7	2800	B 2	2903	B 7	3900	C 3	3903	B 5	3906	B 4	3909	C 6	3912	C 3	3915	C 2	6901	C 3	6904	A 6	6907	B 5	SK11	C 2	SK3	C 4	SK6	B 8	SK9	B10

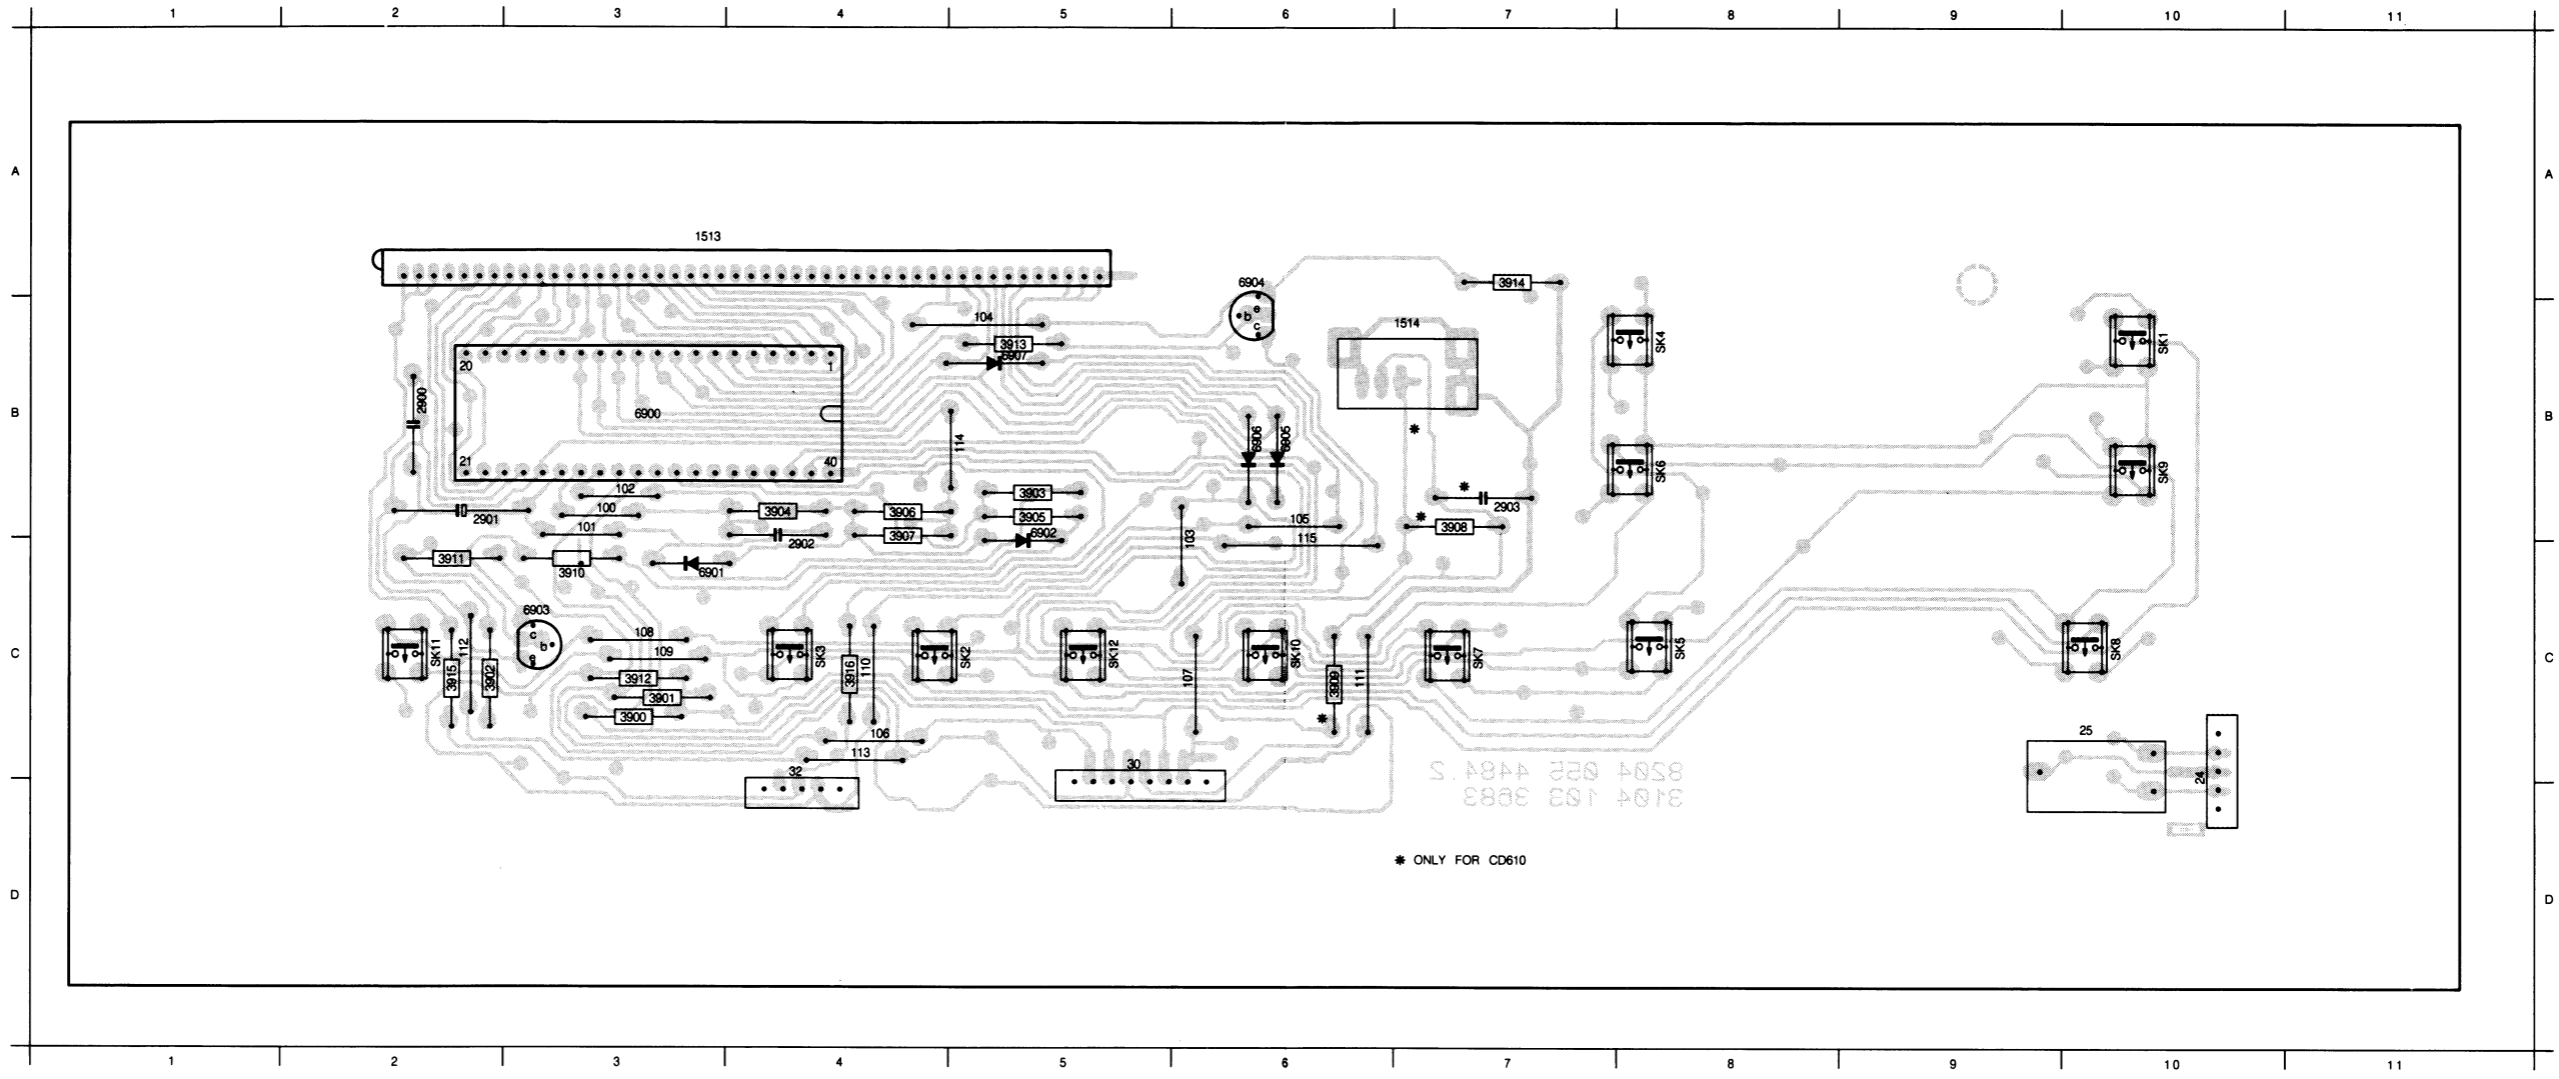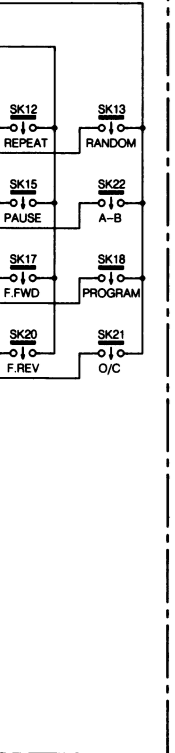


3104 103 3983
8504 022 4484 S


* ONLY FOR CD610

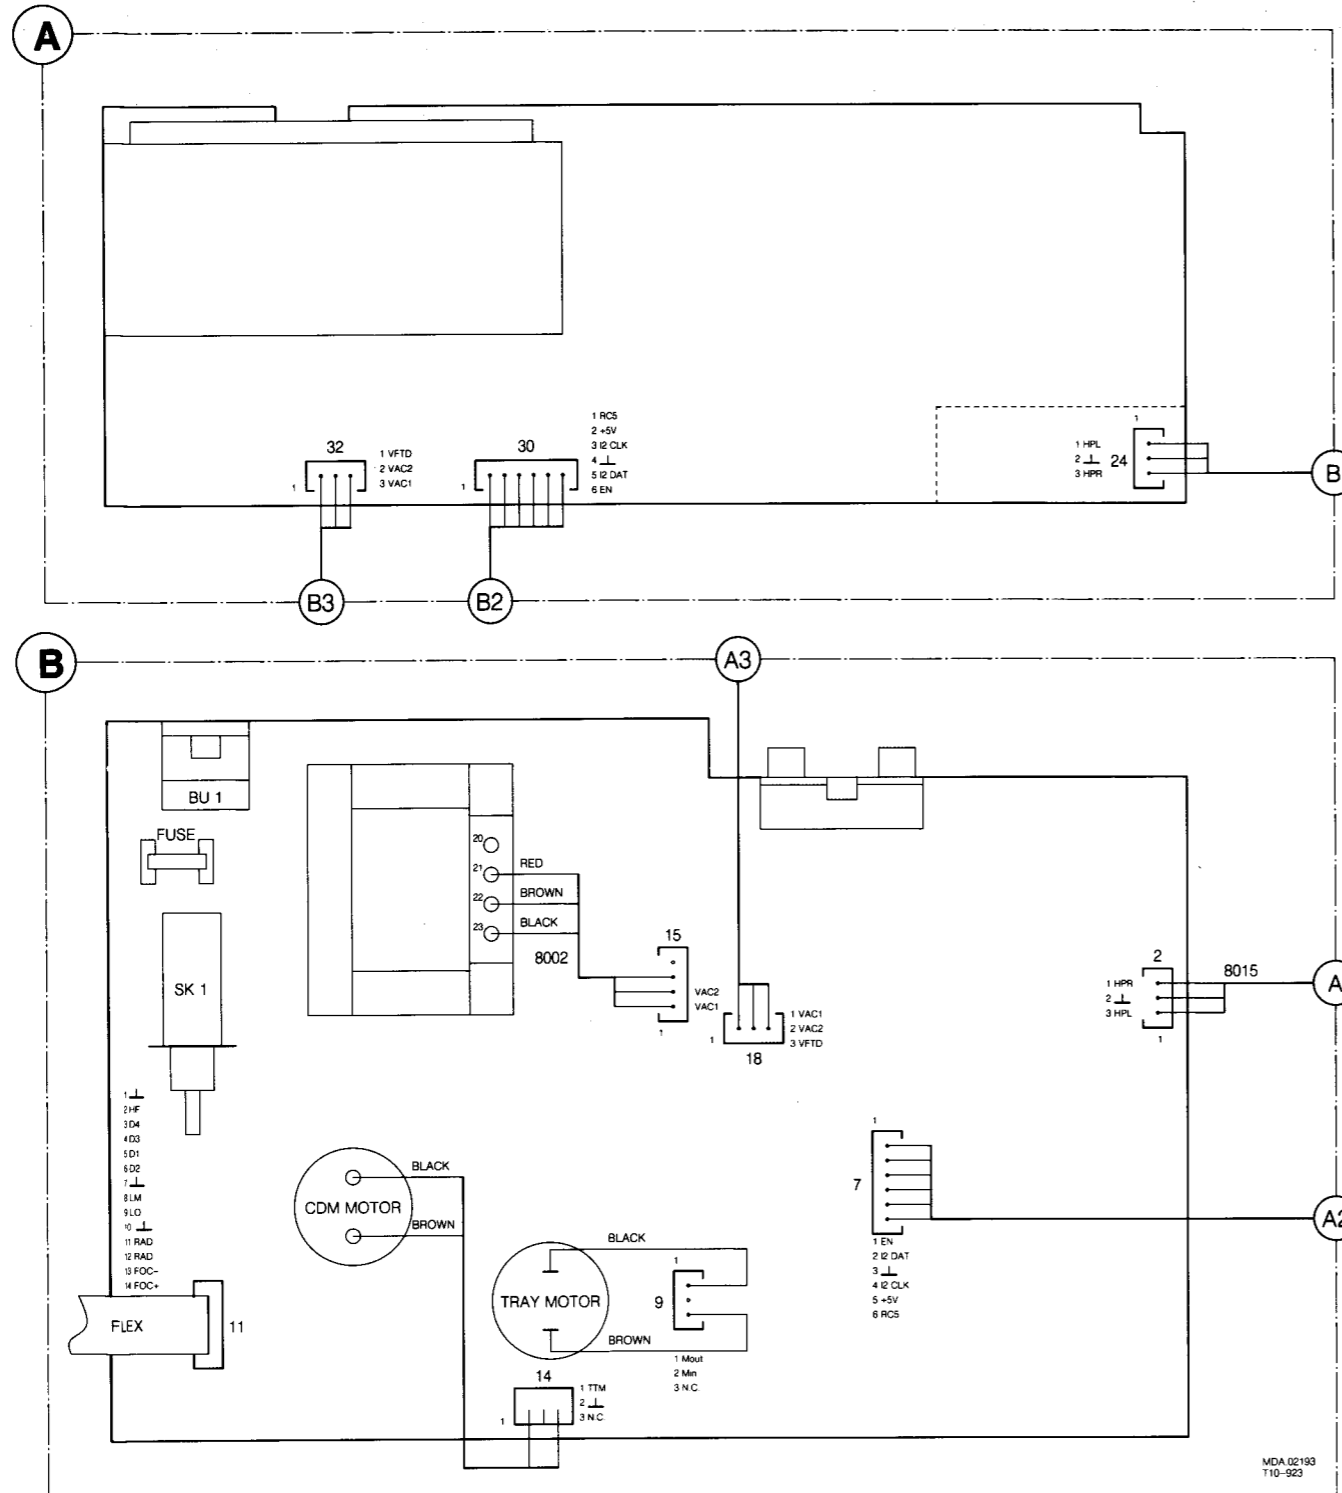

Electrical parts

2500	4822 126 10005	3,3nF 20% 400V	2669	4822 121 51324	1,2nF 5% 50V
2501	4822 122 33147	22nF 20%	2670	4822 124 41528	100µF 20% 25V
2503	4822 122 33147	22nF 20%	2671	4822 124 41528	100µF 20% 25V
2504	4822 122 31727	470pF 5% 63V	2673	4822 124 41577	4,7µF 20% 50V
2506	4822 122 10166	22nF 30% 16V	2674	4822 122 33147	22nF 20%
2507	4822 122 31644	2,2nF 10% 63V	2675	4822 122 33147	22nF 20%
2508	5322 121 42604	47nF 5% 63V	2690	4822 124 41572	220µF 20% 35V
2509	4822 122 31765	100pF 5% 50V	2691	5322 121 42661	330nF 5% 63V
2510	4822 122 32442	10nF 10% 50V	2692	5322 121 42386	100nF 5% 63V
2511	4822 122 31746	1nF 5% 50V	2693	4822 122 33147	22nF 20%
2513	4822 121 42245	220nF 10% 63V	2696	4822 121 42888	27nF 5% 50V
2514	4822 121 51252	470nF 5% 100V	2697	4822 121 51312	2,7nF 5% 50V
2515	4822 122 31746	1nF 5% 50V	2698	4822 121 51312	2,7nF 5% 50V
2519	4822 124 22027	47µF 20% 25V	2699	4822 121 42888	27nF 5% 50V
2520	4822 122 31965	220pF 5% 63V	2700	4822 124 41577	4,7µF 20% 50V
2521	4822 124 40272	33µF 20% 16V	2702	4822 124 22337	22µF 20% 63V
2523	4822 124 41595	220µF 20% 50V	2703	4822 124 23031	470µF 20% 25V
2528	4822 122 33104	100nF 10% 63V	2705	4822 122 33147	22nF 20%
2530	4822 121 51321	8,2mF 1% 63V	2706	4822 122 33147	22nF 20%
2531	4822 121 51321	8,2mF 1% 63V	2707	4822 124 41458	4700µF 20% 16V
2532	4822 124 40272	33µF 20% 16V	2708	4822 124 40272	33µF 20% 16V
2534	5322 121 42661	330nF 5% 63V	2709	4822 122 33147	22nF 20%
2535	5322 122 31848	33nF 10% 63V	2710	4822 122 33147	22nF 20%
2536	5322 122 31848	33nF 10% 63V	2711	4822 124 41571	1000µF 20% 16V
2537	4822 121 42245	220nF 10% 63V	2712	4822 124 40272	33µF 20% 16V
2538	4822 121 42245	220nF 10% 63V	2713	4822 124 23031	470µF 20% 25V
2540	4822 124 41583	680nF 20% 50V	2900	4822 122 10166	22nF 30% 16V
2542	4822 122 33147	22nF 20%	2901	4822 124 22027	47µF 20% 25V
2545	4822 122 33104	100nF 10% 63V	2902	4822 122 31465	270pF 10% 50V
2546	4822 122 33147	22nF 20%	2903	4822 122 10166	22nF 30% 16V
2550	5322 121 42604	47nF 5% 63V			
2560	4822 121 51314	4,7nF 5% 50V			
2561	4822 121 51252	470nF 5% 100V			
2562	5322 121 42661	330nF 5% 63V			
2563	4822 122 33104	100nF 10% 63V			
2566	4822 122 33147	22nF 20%			
2570	4822 122 31644	2,2nF 10% 63V			
2572	5322 121 42661	330nF 5% 63V			
2574	4822 122 31759	18nF 10%			
2600	4822 122 31772	47pF 5% 50V			
2601	4822 122 31644	2,2nF 10% 63V			
2602	4822 121 51252	470nF 5% 100V			
2604	4822 124 41576	2,2µF 20% 50V			
2607	4822 124 40272	33µF 20% 16V			
2608	4822 122 33147	22nF 20%			
2609	4822 122 33147	22nF 20%			
2610	4822 124 22027	47µF 20% 25V			
2611	4822 122 33147	22nF 20%			
2612	4822 124 40272	33µF 20% 16V			
2620	4822 122 33147	22nF 20%			
2621	4822 122 33147	22nF 20%			
2622	4822 124 22031	4,7µF 20% 63V			
2623	4822 122 31772	47pF 5% 50V			
2624	4822 122 31772	47pF 5% 50V			
2630	4822 122 31772	47pF 5% 50V			
2631	4822 122 31772	47pF 5% 50V			
2632	4822 124 40272	33µF 20% 16V			
2633	4822 122 33147	22nF 20%			
2634	4822 124 40196	220µF 20% 16V			
2635	4822 122 33147	20nF 20%			
2645	4822 122 33147	20nF 20%			
2646	4822 122 33104	100nF 10% 63V			
2664	4822 121 51309	1,2nF 5% 50V			
2665	4822 121 51309	1,2nF 5% 50V			
2666	4822 121 51325	2,2nF 5% 50V			
2667	4822 121 51325	2,2nF 5% 50V			
2668	4822 121 51324	1,2nF 5% 50V			
3501	5322 116 80445	4,7k 1% 0,125W			
3502	5322 116 80429	100k 1% 0,125W			
3503	4822 111 30499	4,7Ω 5% 0,33W			
3504	4822 111 30499	4,7Ω 5% 0,33W			
3505	4822 111 90253	12k 2% 0,125W			
3506	4822 116 52389	100Ω 5% 0,5W			
3507	5322 116 80427	1k 1% 0,125W			
3508	4822 111 90512	24k 2% 0,125W			
3509	4822 116 81208	5,6k 1% 0,125W			
3510	4822 111 90249	10k 2% 0,125W			
3520	4822 101 10685	Trimpot. LIN 4k7 20% 0.05W			
3521	4822 116 52407	220Ω 5% 0,5W			
3522	4822 111 30515	18Ω 5% 0,33W			
3523	4822 111 30511	12Ω 5% 0,33W			
3524	5322 116 80426	100Ω 1% 0,125W			
3533	5322 111 90268	5,1k 2% 0,125W			
3534	4822 111 90197	220k 2% 0,125W			
3535	4822 116 53081	12k 1% 0,6W			
3539	4822 111 90251	22k 2% 0,125W			
3540	4822 111 30499	4,7Ω 5% 0,33W			
3541	4822 111 90544	6,8k 2% 0,125W			
3542	4822 116 90539	33Ω 5% 0,125W			
3543	4822 111 90544	6,8k 2% 0,125W			
3551	4822 116 81206	22Ω 1% 0,4W			
3552	5322 111 90101	1,8k 2% 0,125W			
3553	4822 111 30483	1Ω 5% 0,33W			
3554	4822 111 30483	1Ω 5% 0,33W			
3555	4822 111 90238	18k 2%			
3557	4822 111 90197	220k 2% 0,125W			
3560	4822 111 91494	11k 2%			
3561	4822 116 90417	150k 2%			
3562	4822 111 90568	120k 2% 0,125W			
3563	4822 111 90573	56k 2% 0,125W			
3564	4822 111 91495	160k 2%			
3565	5322 111 90105	27Ω 2% 0,125W			

			
3566	4822 116 81206	22Ω 1% 0,4W	
3567	4822 111 90575	82k 2% 0,125W	
3568	4822 100 20522	Trimpot. LIN 22k 20% 0,05W	
3569	5322 116 80447	470k 1% 0,125W	
3574	5322 116 80441	33k 1% 0,125W	
3575	5322 116 80445	4,7k 1% 0,125W	
3576	4822 116 52848	200k 1% 0,6W	
3577	4822 116 90418	1,2k 2%	
3578	4822 111 90575	82k 2% 0,125W	
3579	4822 116 90417	150k 2%	
3580	4822 116 52426	4,7k 5% 0,5W	
3581	4822 116 53105	3,3k 1% 0,6W	
3582	4822 111 90572	5,6k 2% 0,125W	
3584	4822 111 91492	91k 2%	
3585	4822 111 90214	100k 2% 0,125W	
3586	4822 111 90368	680k 2% 0,125W	
3588	4822 116 52472	47k 5% 0,5W	
3589	5322 116 80445	4,7k 1% 0,125W	
3600	4822 111 90248	2,2k 2% 0,125W	
3602	4822 111 90251	22k 2% 0,125W	
3603	4822 111 90371	75Ω 2% 0,125W	
3604	4822 111 30499	4,7Ω 5% 0,33W	
3605	5322 111 90265	1,6k 2% 0,125W	
3607	4822 111 90571	3,9k 2% 0,125W	
3609	4822 111 30499	4,7Ω 5% 0,33W	
3610	4822 111 90373	9,1k 2% 0,125W	
3612	4822 116 81165	1M 1% 0,125W	
3613	4822 111 90251	22k 2% 0,125W	
3617	4822 111 90251	22k 2% 0,125W	
3620	4822 111 90238	180k 5% 0,25W	
3621	4822 111 90238	180k 5% 0,25W	
3622	5322 116 80446	47k 1% 0,125W	
3623	4822 111 90238	180k 5% 0,25W	
3624	4822 111 90248	2,2k 2% 0,125W	
3625	4822 111 90249	10k 2% 0,125W	
3626	4822 111 90249	10k 2% 0,125W	
3627	4822 111 30499	4,7Ω 5% 0,33W	
3628	4822 111 90251	22k 2% 0,125W	
3629	4822 111 90197	220k 2% 0,125W	
3630	4822 111 90251	22k 2% 0,125W	
3634	4822 111 90251	22k 2% 0,125W	
3635	4822 111 90251	22k 2% 0,125W	
3636	4822 111 90251	22k 2% 0,125W	
3637	4822 111 90251	22k 2% 0,125W	
3638	4822 111 90251	22k 2% 0,125W	
3639	4822 111 90251	22k 2% 0,125W	
3640	4822 111 90251	22k 2% 0,125W	
3645	5322 116 80445	4,7k 1% 0,125W	
3646	4822 111 90251	22k 2% 0,125W	
3647	4822 111 90251	22k 2% 0,125W	
3648	5322 111 90096	1,2k 2% 0,125W	
3650	4822 111 30483	1Ω 5% 0,33W	
3651	4822 111 90197	220k 2% 0,125W	
3652	4822 111 30499	4,7Ω 5% 0,33W	
3659	4822 111 91183	3,3k 2%	
3661	4822 111 90249	10k 2% 0,125W	
3665	4822 116 90416	3k 2%	
3666	4822 116 90416	3k 2%	
3667	4822 116 90418	1,2k 2%	
3668	4822 116 90418	1,2k 2%	
3669	4822 116 90418	1,2k 2%	
3670	4822 116 90418	1,2k 2%	
3671	4822 116 90271	2,4k 2%	
3672	4822 116 90271	2,4k 2%	
3673	4822 111 30508	10Ω 5% 0,33W	
3674	4822 111 30508	10Ω 5% 0,33W	
3675	4822 111 90251	22k 2% 0,125W	
3676	4822 111 90251	22k 2% 0,125W	
3677	5322 116 80444	470Ω 1% 0,125W	
3678	5322 116 80444	470Ω 1% 0,125W	
3679	5322 116 80444	470Ω 1% 0,125W	
3680	5322 116 80444	470Ω 1% 0,125W	
3681	5322 116 80431	150Ω 5%	
3682	5322 116 80431	150Ω 5%	
3691	4822 111 90251	22k 2% 0,125W	
3692	4822 111 90251	22k 2% 0,125W	
3700	4822 111 90163	jumper	
3701	5322 116 80445	4,7k 1% 0,125W	
3702	4822 111 90425	5,6M 5% 0,125W	
3703	4822 116 90541	56k 5% 0,125W	
3704	5322 111 90096	1,2k 2% 0,125W	
3705	4822 116 90541	56k 5% 0,125W	
3706	5322 111 90096	1,2k 2% 0,125W	
3707	5322 111 90096	1,2k 2% 0,125W	
3708	5322 111 90096	1,2k 2% 0,125W	
3709	5322 111 90096	1,2k 2% 0,125W	
3724	4822 116 53081	12k 1% 0,6W	
3725	4822 111 90253	12k 2% 0,125W	
3726	4822 111 90251	22k 5%	
3728	5322 116 80445	4,7k 1% 0,125W	
3729	4822 116 53081	12k 1% 0,6W	
3730	4822 111 90253	12k 2% 0,125W	
3731	4822 116 81206	22k 1% 0,4W	
3736	4822 111 90251	22k 2% 0,125W	
3737	5322 116 80445	4,7k 1% 0,125W	
3738	4822 111 90251	22k 2% 0,125W	
3739	4822 111 90423	4,7M 5% 0,125W	
3740	5322 111 90113	560Ω 2%	
3743	5322 116 80427	1k 1% 0,125W	
3744	5322 111 90113	560Ω 2%	
3745	4822 111 90423	4,7M 5% 0,125W	
3747	5322 116 80441	33k 1% 0,125W	
3748	4822 111 90571	3,9k 2% 0,125W	
3775	4822 111 90251	22k 2% 0,125W	
3776	5322 116 80427	1k 1% 0,125W	
3779	5322 111 90306	750Ω 5%	
3800	4822 111 90163	jumper	
3801	4822 111 90163	jumper	
3802	4822 111 90163	jumper	
3803	4822 111 90163	jumper	
3804	4822 111 90163	jumper	
3805	4822 111 90163	jumper	
3806	4822 111 90163	jumper	
3807	4822 111 90163	jumper	
3808	4822 111 90163	jumper	
3809	4822 111 90163	jumper	
3810	4822 111 90163	jumper	
3811	4822 111 90163	jumper	
3812	4822 111 90163	jumper	
3813	4822 111 90163	jumper	
3814	4822 111 90163	jumper	
3815	4822 111 90163	jumper	
3816	4822 111 90163	jumper	
3817	4822 111 90163	jumper	
3818	4822 111 90163	jumper	
3819	4822 111 90163	jumper	
3820	4822 111 90163	jumper	
3821	4822 111 90163	jumper	
3822	4822 111 90163	jumper	
3823	4822 111 90163	jumper	
3824	4822 111 90163	jumper	
3825	4822 111 90163	jumper	
3826	4822 111 90163	jumper	
3827	4822 111 90163	jumper	
3828	4822 111 90163	jumper	
3829	4822 111 90163	jumper	

			
3830	4822 111 90163	jumper	
3831	4822 111 90163	jumper	
3832	4822 111 90163	jumper	
3833	4822 111 90163	jumper	
3834	4822 111 90163	jumper	
3835	4822 111 90163	jumper	
3851	4822 111 90163	jumper	
3900	4822 116 52463	22k 5% 0,5W	
3901	4822 116 52463	22k 5% 0,5W	
3902	4822 116 52366	4,7Ω 5% 0,5W	
3903	4822 116 52472	47k 5% 0,5W	
3904	4822 116 52501	150k 5% 0,5W	
3905	4822 116 52426	4,7k 5% 0,5W	
3906	4822 116 52433	820Ω 5% 0,5W	
3907	4822 116 52433	820Ω 5% 0,5W	
3910	4822 116 52426	4,7k 5% 0,5W	
3911	4822 116 52426	4,7k 5% 0,5W	
3912	4822 116 52463	22k 5% 0,5W	
3913	4822 116 52426	4,7k 5% 0,5W	
3914	4822 116 52463	22k 5% 0,5W	
6500	4822 209 72587	TCA0372DP2	
6501	4822 209 73234	TDA8808T/C3	
6502	4822 130 44121	BC338	
6503	4822 209 73235	TDA8809T/C2	
6504	4822 209 72587	TCA0372DP2	
6510	5322 130 32962	BZV85-C6V2	
6512	4822 209 83274	NJM4560D	
6513	4822 130 30621	1N4148	
6515	4822 130 30621	1N4148	
6516	5322 130 42012	BC858	
6517	5322 130 42012	BC858	
6519	5322 130 30684	1N4002	
6520	4822 130 42131	BF550	
6523	4822 209 70422	MN4264-15	
6525	4822 130 61207	BC848	
6526	4822 130 61207	BC848	
6527	5322 130 41983	BC858B	
6530	4822 209 61011	MC68HC05C8P/ZC99684	
6531	4822 130 42675	BC818	
6535	4822 209 83163	LM833N	
6536	4822 209 83163	LM833N	
6538	5322 130 30684	1N4002	
6540	4822 209 11157	SAA7220	
6541	4822 209 73236	TDA1543	
6542	4822 130 42675	BC818	
6543	4822 130 42675	BC818	
6544	4822 130 42675	BC818	
6545	4822 130 42675	BC818	
6546	4822 209 83274	NJM4560D	
6547	4822 130 30621	1N4148	
6548	4822 130 30621	1N4148	
6549	4822 209 60775	SAA7310	
6551	5322 130 30684	1N4002	
6552	4822 130 30621	1N4148	
6553	4822 130 30621	1N4148	
6554	5322 130 42012	BC858	
6555	4822 130 31981	BZX55-C3V9	
6557	4822 130 30621	1N4148	
6558	4822 130 40938	BC548	
6561	4822 130 61207	BC848	
6562	5322 130 42136	BC848C	
6563	5322 130 42012	BC858	
6564	4822 130 61207	BC848	
6565	4822 130 61207	BC848	
6572	4822 130 34197	BZX55-C12	

6577	4822 209 80808	MC7815CT
6580	5322 130 30684	1N4002
6581	5322 130 30684	1N4002
6582	5322 130 30684	1N4002
6583	5322 130 30684	1N4002
6584	5322 130 30684	1N4002
6585	5322 130 30684	1N4002
6586	5322 130 30684	1N4002
6587	5322 130 30684	1N4002
6591	4822 209 71579	TY40408
6592	4822 209 73233	MC79L05ACPRE
6900	4822 209 72226	U3090MG
6901	4822 130 81086	BZX55-C15
6902	4822 130 30621	1N4148
6903	4822 130 40938	BC548
6904	4822 130 40938	BC548
6905	4822 130 30621	1N4148
6906	4822 130 30621	1N4148
6907	4822 130 30621	1N4148
Miscellaneous		
BU3	4822 267 30743	HEADPHONE SOCKET
SK11	4822 276 12276	TACT SWITCH
SK12	4822 276 12276	TACT SWITCH
SK13	4822 276 12276	TACT SWITCH
SK14	4822 276 12276	TACT SWITCH
SK15	4822 276 12276	TACT SWITCH
SK16	4822 276 12276	TACT SWITCH
SK17	4822 276 12276	TACT SWITCH
SK18	4822 276 12276	TACT SWITCH
SK19	4822 276 12276	TACT SWITCH
SK20	4822 276 12276	TACT SWITCH
SK21	4822 276 12276	TACT SWITCH
SK22	4822 276 12276	TACT SWITCH
1502	4822 242 71349	11,2896 MHz X-TAL
1503	4822 242 70831	4 MHz CER. RES.
1510	4822 253 30009	FUSE 160mA T
1510	4822 253 30217	FUSE 300mA T
1513	4822 130 90661	DISPLAY 6-MT-147GK
1514	4822 214 51772	IR RECEIVER
5001	4822 146 30778	MAINS TRANSFORMER
5001	4822 146 30802	MAINS TRANSFORMER
5502	4822 157 53141	470μH 10%
5503	4822 157 53141	470μH 10%
	4822 218 10257	RC CD630
	4822 218 10293	RC NEUTRAL
	4822 267 40766	CINCH SOCKET 4P
	4822 492 63076	SPRING CLIP
	4822 265 20291	MAINS INLET