

MODEL : MULTICOM - 485

HOW TO CHANGE FROM 40CH TO 400CH (400CH TO 40CH)

THIS SAMPLE IS 40CH

< 40CH --> 400CH >

1. POWER SWITCH OFF
2. KEEP CH 9 BUTTON PRESSED (PRESS CH 9 SWITCH CONTINUOUSLY)
3. POWER SWITCH ON
4. RELEASE CH 9 BUTTON.
5. NOW THE UNIT BECAME 400CH AND CH 9 BUTTON BECAME BAND SWITCH.
(A, B, C, D, E, F, G, H, I, J)
6. LCR BUTTON BECAME +, -SKHz SWITCH

< 400CH --> 40CH >


1. POWER SWITCH OFF
2. POWER SWITCH ON
3. NOW THE UNIT BECAME 40CH AND CH 9 BUTTON BECAME CH 9 SWITCH.
4. LCR BUTTON BECAME LCR SWITCH

< SECURITY >

THE END USER CAN AVOID THE INSPECTION BY THE AUTHORITY (POLICE)
FOR USING 400CH.


= CPU MODE =

S2, S3	MODE
OPEN (0)	400CH
SHORT (1)	40CH

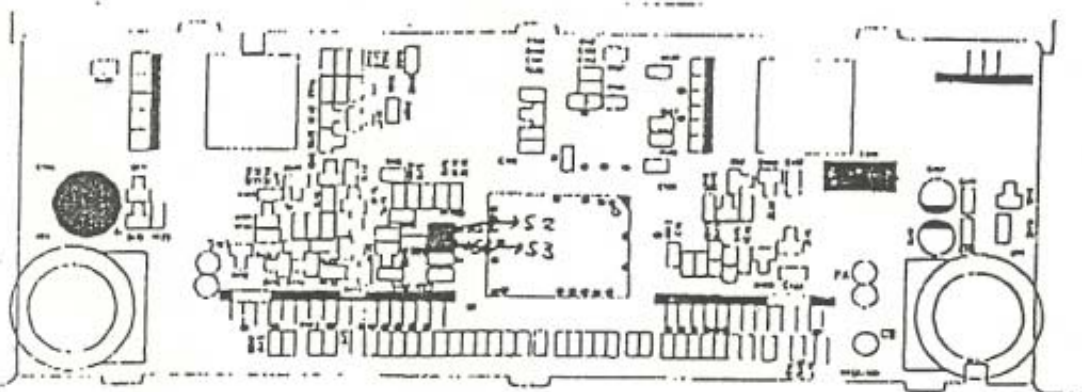

< FRONT PCB >

MULTICOM - 485

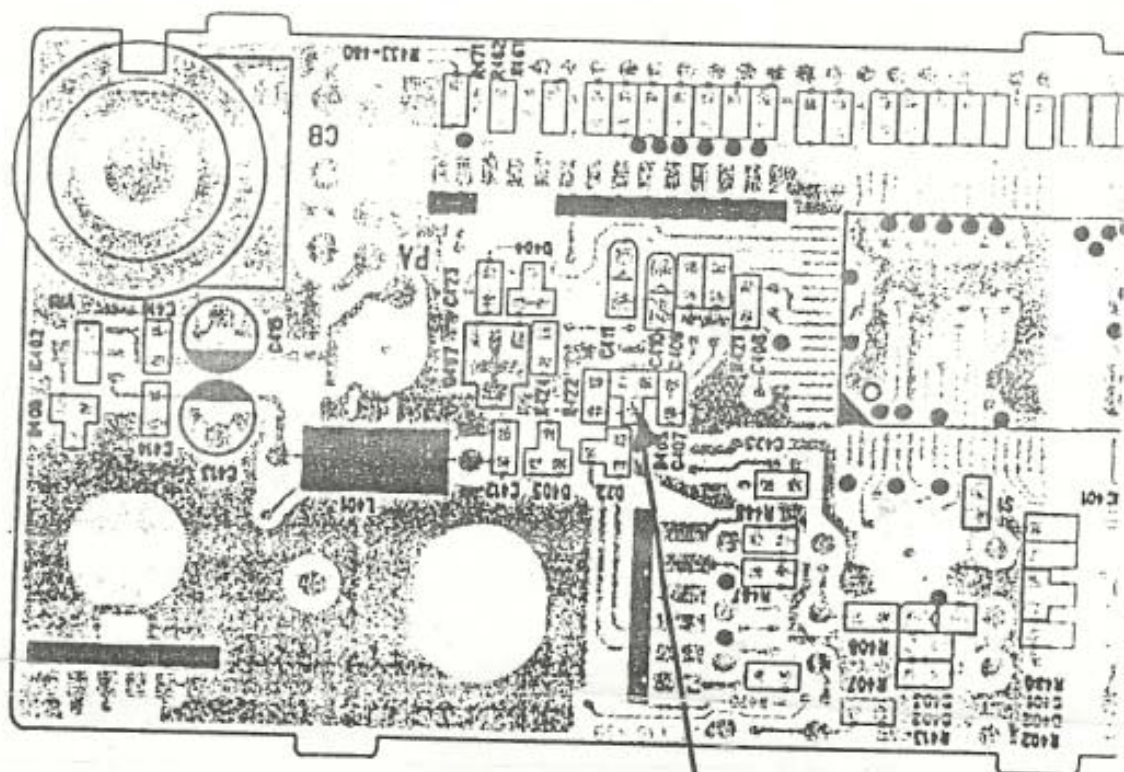

SCARICARE CATODO
DI D 403
SENZA ALIMENTAZIONE

