

OVERVIEW

Compaq ProLiant 3000


BENEFITS AT A GLANCE

- 300-MHz and 333-MHz Intel Pentium® II processor (dual processor capability)
- 512-KB level 2 writeback cache per processor
- I₂O Connector
- Highly Parallel System Architecture for improved system bandwidth
- ECC-protected memory bus and cache
- 64 MB of ECC EDO memory expandable to 512 MB and 3 GB¹
- Five PCI and three shared PCI/EISA slots (eight total slots)
- Internal mass storage capacity up to 109.2 GB
- Netelligent 10/100 TX PCI UTP Controller
- Integrated Dual Channel Wide-Ultra SCSI-3 Controller
- Integrated Remote Console and Automatic Server Recovery-2 (ASR-2)
- Integrated Management Display (IMD)
- 500/750 Watt Hot-Pluggable Power Supply with optional Hot-Pluggable Redundant Power Supply (RPS)
- Preinstalled 16X Max² CD-ROM Drive IDE
- Compaq Insight Manager and SmartStart
- Protected by a three-year on-site limited warranty and extended Pre-Failure Warranty³ which covers Pentium II processors, memory and disk drives, as well as a wide range of Compaq Services.

¹ ProLiant 3000 6/333 only.

² Data transfer rates will vary from 150 KB/s to 2400 KB/s.

³ Certain restrictions and exclusions apply. Consult the Compaq Customer Support Center for details.

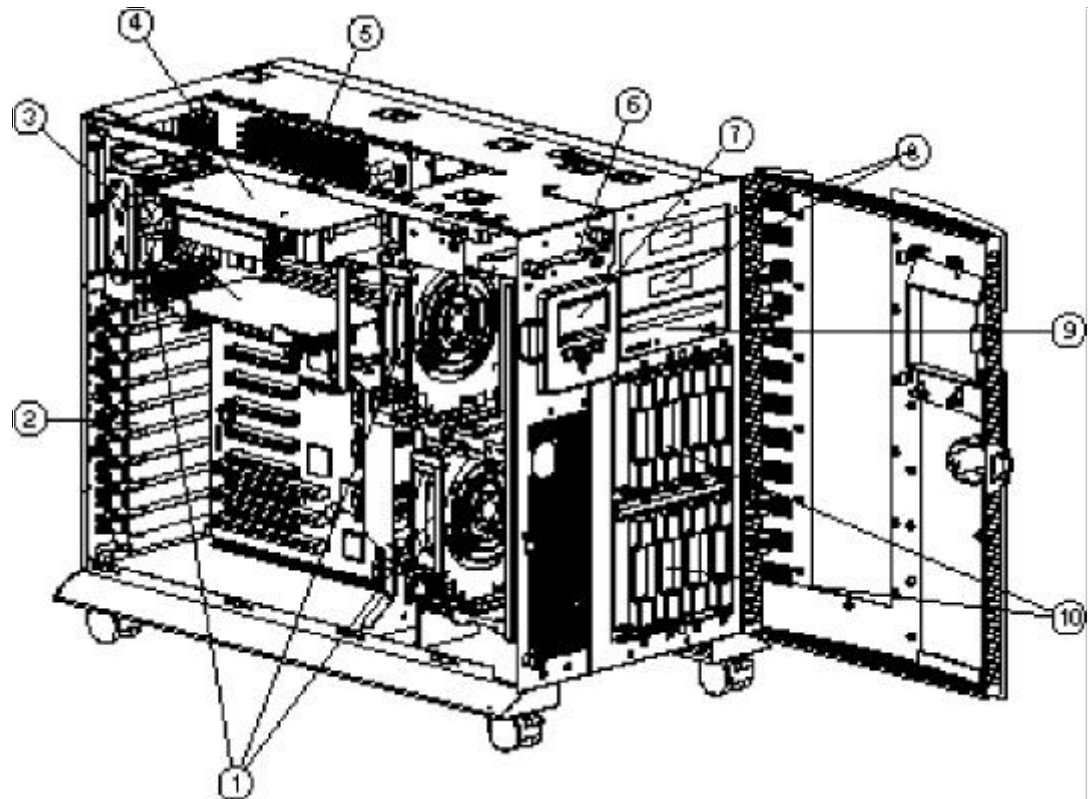

1. Fans
2. I/O Slot Covers
3. Memory Board
4. Pentium II Processor Board
5. System Board DIMM Memory Sockets

6. 3.5-inch Diskette Drive
7. Integrated Management Display (IMD)
8. 5.25-inch Removable Media Bays
9. 16X Max² CD-ROM IDE
10. Hot-Plug SCSI Drive Cage

COMPAQ