



MF/HF RECEIVER NRD-630



Japan Radio Co., Ltd.

NRD-630



Outline

The NRD-630 is a MF/HF receiver developed with cutting-edge digital technologies, which can be used for coast, land and marine stations (excluding obliged vessels).

Stability is improved by combining high-end OCXO and DDS circuits, making it suitable for not only SSB communication but also for data communication and facsimile.

Features

●Digital signal processing by DSP

Along with the IF filter, frequencies lower than the third IF are subjected to digital signal processing performed by a 32-bit floating point DSP. This enables signal processing with high precision calculation and very wide dynamic range, resulting in high quality signal reproduction with little distortion.



●High-end OCXO

Adoption of high-end OCXO (Oven Controlled X'tal Oscillator) reduces the warm-up time (approx. 1/5 that of our previous product), and enables stability at 0.2 ppm.

●High-end DDS IC

The high-end DDS (Direct Digital Synthesizer) IC provides high-speed and smooth 1Hz step tuning.

●FIR Filter

FIR (Finite Impulse Response) filter is used as the IF filter for frequencies above 2.7 kHz, thereby significantly reducing the group delay distortion. As a result, the filter characteristic that can support high-speed data transmission are achieved in addition to a clear sound.

●Syllabic Squelch

SSQ (Syllabic Squelch) is provided as standard, in which the squelch circuit is activated when receiving extraneous

pulse noise during a watch and the circuit opens up only when it detects the voice. This allows stable squelch operation in environments where the reception level varies due to fading and the like.

●Full Tuning for All Frequency Bands

The electronic automatic tuning circuit deployed as input tuning circuit can select the target wave and its peripheral signals so as to significantly improve the effective sensitivity.

●Measures Against Static

A noise blanker and AF filter are provided as standard for removing of noise due to pulses generated by rain/snowfall, and for improving the S/N ratio of static-ridden signals, respectively.

●300 Preset Channels

The built-in memory can preset 300 channels storing frequency, mode, bandwidth, AGC and attenuator.

●Worldwide & Multi Power Source

Adaptable for AC at 85-264 V (no switchover required) and also for DC at +24 V (negative grounding). When simultaneously provided with AC and DC, AC is selected first. Switchover between AC and DC is performed automatically.

Specifications

- **Frequency Range**
90 kHz to 29.999999 MHz (1 Hz steps)

- **Receiving System**
Triple super-heterodyne system
1st IF: 70.455 MHz
2nd IF: 455 kHz
3rd IF: 13 kHz

- **Modes**
CW (A1A), MCW (A2A, H2A), DSB (A3E), USB/LSB (R3E, H3E, J3E, J2D), FSK (F1B, J2B), FAX (F3C), ISB (B8E, B9W)

- **Sensitivity**

Mode \ Frequency	CW	DSB	SSB
90 kHz to 1599.999 kHz	10 μ V or less	30 μ V or less	—
1600 kHz to 29.999999 MHz	2 μ V or less	6 μ V or less	3 μ V or less

Bandwidth: 3 kHz, output: 100 mW

CW: $(S+N)/N=20$ dB

DGB: $(S+N)/N=20$ dB, 1 kHz, 30% modulation

SSB: $(S+N+D)/(N+D)=20$ dB

In the case of DSC/NBDP:

The character error rate at 1 μ V input voltage is below 1×10^{-2}

Provided that reception mode is FSK and bandwidth is 0.3 kHz

- **Selectivity**

Attenuation \ Bandwidth	6-dB bandwidth	60-dB bandwidth
6 kHz	4.5 kHz to 7.0 kHz	14 kHz or less
3 kHz	2.7 kHz to 3.3 kHz	4.4 kHz or less
2.7 kHz	2.4 kHz to 3.0 kHz	4.1 kHz or less
1 kHz	1.0 kHz to 1.5 kHz	3.0 kHz or less
0.5 kHz	0.45 kHz to 0.6 kHz	2.0 kHz or less
0.3 kHz	0.27 kHz to 0.3 kHz	1.1 kHz or less

- **Spurious Response**
Image rejection ratio: 70 dB or more
IF rejection ratio: 80 dB or more

- **Blocking**
When an unwanted signal at a spacing of more than 4 kHz from the desired signal is applied to the desired signal input voltage of 10 μ V, the unwanted signal input voltage that suppresses the output of the desired signal by 3 dB is 10 mV or more.

- **Number of Preset Channels**
300 channels (frequency, mode, bandwidth, AGC and ATT)

- **Frequency Display**
LED display in 8 digits (10 MHz to 1 Hz digits)

- **Tuning Method**
A tuning knob, Up/Down switch and numeric keypad are provided for frequency input.

- **Frequency Stability**
Within ± 0.2 ppm

- **Overall Distortion**
The ratio of 1000 Hz output to its unwanted frequency component is 20 dB or more under condition where output level is set to 500 mW by an input level of 30 μ V.

- **Group Delay**
500 μ sec or less at the modulation frequency of 300 Hz-3000 Hz (USB, 3 kHz, AF filter are in the Off state)

- **AGC Characteristic**
The variation of the low frequency output for the antenna input of 3 μ V to 100 mV is 10 dB or less.

- **Conducted Spurious Emission**
The power emitted from the antenna terminal is 4 nW or less.

- **Nominal RF Input Impedance**
50 Ω unbalanced

- **Radio Frequency Attenuator**
20 dB/10 dB

- **Variable Range of PBS (Pass Band Shift) Variation**
 ± 2.3 kHz (at 6 kHz)

- **Variable Range of BFO and Clarifier**
BFO: ± 9.999 kHz (1 Hz step)
Clarifier: ± 200 Hz (1 Hz step)

- **Audio Frequency Output**
Internal speaker output: 1 W or more
External speaker output: 1 W or more (8 Ω unbalanced)
Headphone output: 10 mW or more (600 Ω unbalanced)

- **Line Output**
-20 dBm to +10 dBm (600 Ω balanced)

- **Power Requirements**
DC: +24 V (operable -25 and +35%); 30 W or less
AC: 85-264 V; 40 VA or less
Single-phase 50/60 Hz
AC/DC automatic switchover (automatic switchover to DC power source when AC power source turns off)


- **Operation Conditions**
Preheat time: 1 min.
Temperature range: between -15 and +55 $^{\circ}$ C
Relative humidity: 90% (at +40 $^{\circ}$ C, without condensation)

- **Dimensions & Weight**
Dimensions: H149 x W480 x D294 mm (excluding projections)
Weight: 6.0 kg or less


Dimensions

(mm)

Rackmount type

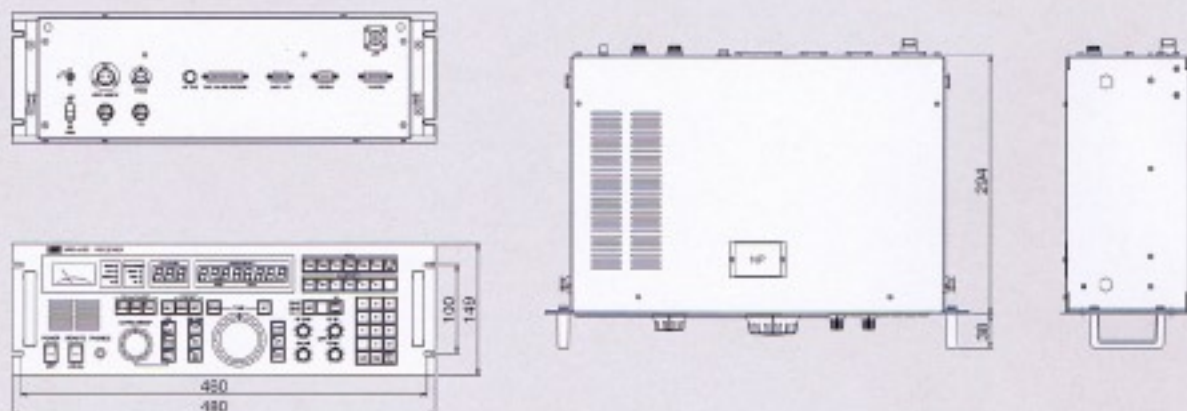

Desktop type

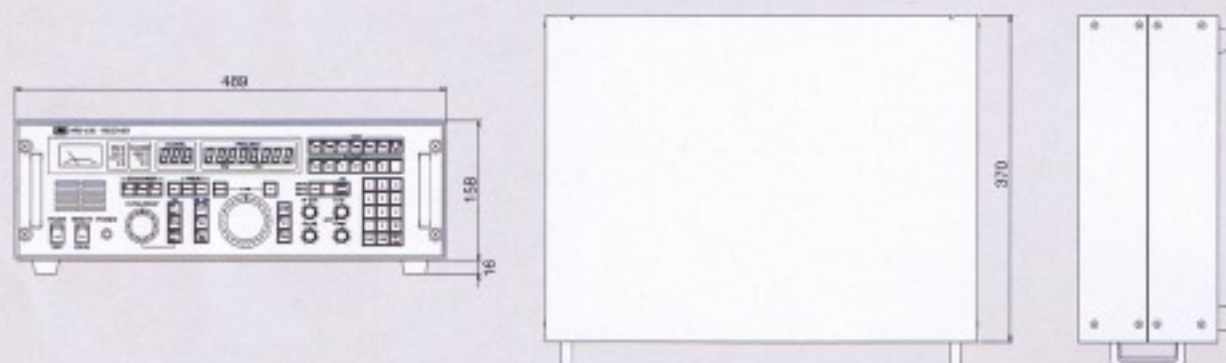

Notice

Read the "Instruction Manual" before using the equipment to ensure safe operation.

*Specifications subject to change without notice.

For further information, contact:

ML&S martin lynch & sons
Suppliers of Communications Equipment

Martin Lynch & Sons
Outline House
73 Guildford Street
Chertsey
Surrey
KT16 9PF

JRC

Since 1915

Japan Radio Co., Ltd.

URL <http://www.jrc.co.jp/>

Main Office: Nittochi Nishi-Shinjuku bldg.
10-1, Nishi-Shinjuku 6-chome
Shinjuku-ku, Tokyo 160-8328, Japan
Telephone: +81-3-3348-4099
Facsimile: +81-3-3348-4139

Overseas Branches : Seattle, Amsterdam
Liaison Offices : Taipei, Manila, Jakarta, Singapore,
Hanoi, New York, Athens

MEM **ISO 9001** CERTIFIED

ISO9001, ISO14001 Certified