


Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------

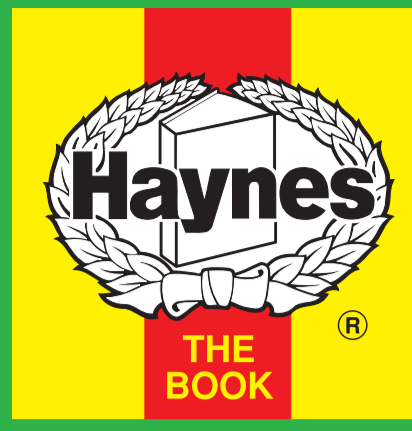

Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system M5 CAT (E34) 1991 to 1993

Type	S38/B36 36 6S1 232kW	
Capacity (cm ³) / number of cylinders	3535 / 6	
Compression ratio / pressure	bar	10.0 / 10 to 11
Oil pressure	bar	0.5 [3.0]
Oil temperature	°C	80
Valve clearance - inlet	mm	0.28 to 0.33
Valve clearance - exhaust	mm	0.28 to 0.33
Firing order	1-5-3-6-2-4	
No 1 cylinder position	TCE	
Thermostat opening temperature	°C	79
Radiator cap pressure	bar	2.0±0.15

Fuel system M5 CAT (E34) 1991 to 1993

Idle speed - manual [auto]	rpm	970±40
Fast idle speed - manual [auto]	rpm	—
CO @ idle speed [3000 rpm] - see page VI	%	0.8±0.4
HC @ idle speed [3000 rpm] - see page VI	ppm	≤200
CO ₂ @ idle speed [3000 rpm] - see page VI	%	—
O ₂ @ idle speed [3000 rpm] - see page VI	%	—
Carburettor / fuel injection	Bosch	
Type / ref	M1.2-Motronic	
Main jet / needle	—	
Injection pressure	bar	3.0
Pump pressure	bar	2.8 to 3.2
Octane rating	RON	95[U]

Ignition system M5 CAT (E34) 1991 to 1993

Type	DME Motronic	
Ignition coil	Bosch	
Primary resistance	ohms	a: 0.50. b: 0.37
Ballast resistor	ohms	—
Voltage - Tmnl 15(+) to earth	V	≥10.8
Distributor	Bosch	
Points gap (air gap)	mm	[0.30 to 0.70]
Dwell angle	° (%)	—
Condenser capacity	µF	—
Rotation	Clockwise	
Ignition timing - basic [static	° Crankshaft @ rpm	Computer control
V = Vacuum NV = No Vacuum	NV	
Total ignition advance	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Centrifugal check.	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Vacuum range check	mbar	Computer control
Maximum vacuum advance	° Crankshaft	—
Spark plugs	Bosch/Champion	
Type	Y6DC / A6G	
Electrode gap	mm	0.60±0.10

Electrical system M5 CAT (E34) 1991 to 1993

Battery	V / CC / RC	12 / 85Ah
Alternator voltage / full load current / engine rpm	13.5 to 14.2 / 140 / 1500	
Starter motor current / voltage - cranking	A / V	200 / 9.0
- locked	A / V	—

Running gear M5 CAT (E34) 1991 to 1993

Brakes -		
Front (min. friction material thickness)	mm	2.0
Rear (min. friction material thickness)	mm	2.0

Tyres		
Saloon	Size	235/45x17
Estate / Van	Size	—
Pressure - front / rear - Saloon	bar	2.3 / 2.5
- Estate / Van	bar	—

Front suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	[+20'±5'] L
Camber	-30'±30' L	
Castor	+8°28'±30' L	
King pin inclination	+12°46'±30' L	

Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	[+16'±4']
Camber	-2°15'±30'	


Torque wrench settings M5 CAT (E34) 1991 to 1993

Cylinder head - stage 1	Nm	20
- stage 2	Nm	+ 60°
Cylinder head - stage 3	Nm	+ 70°
- stage 4	Nm	—
Big-end bearings	Nm	15, 30 + 60° N
Main bearings	Nm	22.5±2.5 + 50±3°
Clutch cover	Nm	24
Flywheel [driveplate]	Nm	113 to 130 N
Front hubs	Nm	WSM
Rear hubs	Nm	247.6 ±5%
Wheel nuts / bolts	Nm	100±10
Spark plugs	Nm	24 to 28

Capacities M5 CAT (E34) 1991 to 1993

Engine oil & filter	litres	5.75
Gearbox - 4-speed [5-speed]	litres	1.25
Automatic transmission - refill	litres	—
Final drive	litres	1.9
Cooling system	litres	13.3
Fuel tank	litres	90

Notes and Illustrations

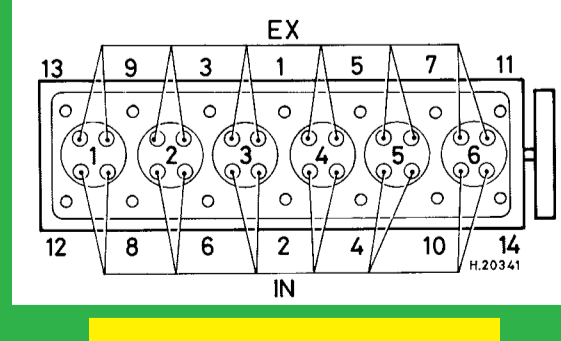

3535 cm³, S38