

Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------



Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU
HELP

Engine and cooling system BX 14 1983 to 1988

Type		XY6C (150A)
Capacity (cm ³) / number of cylinders		1360 / 4
Compression ratio / pressure	bar	9.3 / _
Oil pressure	bar	[3.0]
Oil temperature	°C	80
Valve clearance - inlet	mm	0.10 to 0.15
Valve clearance - exhaust	mm	0.20 to 0.30
Firing order		1-3-4-2
No 1 cylinder position		FE
Thermostat opening temperature	°C	82
Radiator cap pressure	bar	1.0

Fuel system BX 14 1983 to 1988

Idle speed - manual [auto]	rpm	700±50
Fast idle speed - manual [auto]	rpm	_
CO @ idle speed [3000 rpm] - see page VI	%	≤0.5 N/A
HC @ idle speed [3000 rpm] - see page VI	ppm	≤100
CO ₂ @ idle speed [3000 rpm] - see page VI	%	≥9.0
O ₂ @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection		Solex
Type / ref		30-30 Z2 CIT 329
Main jet / needle		112.5, 125
Injection pressure	bar	_
Pump pressure	bar	0.25
Octane rating	RON	97[L]

Ignition system BX 14 1983 to 1988

Type		Electronic - Hall effect
Ignition coil		Bosch, Ducellier
Primary resistance	ohms	B: 0.82±10%. D: 0.8±5%
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor		Ducellier
Points gap (air gap)	mm	_
Dwell angle	° (%)	_
Condenser capacity	µF	_
Rotation		_
Ignition timing - basic [static	° Crankshaft @ rpm	8 BTDC @ 850
V = Vacuum NV = No Vacuum		NV
Total ignition advance	° Crankshaft @ rpm	XA1-XD1
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	0 @ 800 to 1600
	° Crankshaft @ rpm	12 to 18 @ 3000
	° Crankshaft @ rpm	20 to 26 @ 5400
Vacuum range check	mbar	80 to 350
Maximum vacuum advance	° Crankshaft	18 to 24
Spark plugs		Bosch/Champion
Type		H7DC / S281YC
Electrode gap	mm	0.60 to 0.70

Electrical system BX 14 1983 to 1988

Battery	V / CC / RC	12 / 175 / 35 or / 175 / 29
Alternator voltage / full load current / engine rpm		13.8 to 14.5 / _ / 3600
Starter motor current / voltage - cranking	A / V	220 to 250 / _
- locked	A / V	350 / _

Running gear BX 14 1983 to 1988

Brakes -		
Front (min. friction material thickness)	mm	_
Rear (min. friction material thickness)	mm	_
Tyres		
Saloon	Size	145x14:165/70x14
Estate / Van	Size	_
Pressure - front / rear - Saloon	bar	1.9 / 2.0
- Estate / Van	bar	_
Front suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	0 to -3.0
Camber		0±30'
Castor		+2°±35'
King pin inclination		+11°58'
Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	0 to +5.0
Camber		-9'±20' [88 ▶: -1°±20']

Torque wrench settings BX 14 1983 to 1988

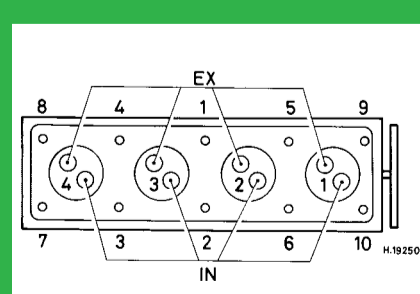
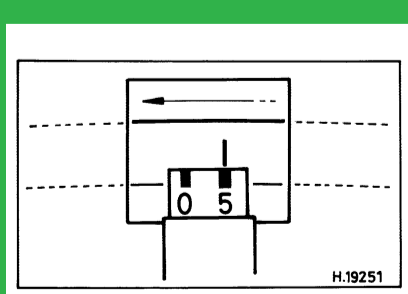
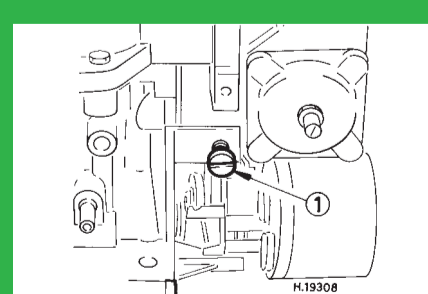
Cylinder head - stage 1	Nm	50
- stage 2	Nm	75
Cylinder head - stage 3	Nm	Warm up, then cool down
- stage 4	Nm	Slacken, then 78
Big-end bearings	Nm	38
Main bearings	Nm	38 then 53
Clutch cover	Nm	10
Flywheel [driveplate]	Nm	68 LkC
Front hubs	Nm	270
Rear hubs	Nm	270
Wheel nuts / bolts	Nm	70. Alloy: 90
Spark plugs	Nm	12

Capacities BX 14 1983 to 1988

Engine oil & filter	litres	4.5
Gearbox - 4-speed [5-speed]	litres	With engine
Automatic transmission - refill	litres	_
Final drive	litres	With engine
Cooling system	litres	6.5
Fuel tank	litres	44

Notes and Illustrations

1: Idle speed 2: CO / Mixture


1360 cm³

1360 cm³

Solex Z2