

Thank you for purchasing a Shakespeare antenna product. Shakespeare works hard to build reliability and durability into all of its products for maximum customer satisfaction. Customer comments are welcome.

Before installing, please study the diagram and check parts supplied against those listed.

IMPORTANT! Please read all instructions before installing.

The Style 390-1 is a 23' (7 m), two-section SSB whip antenna with conductors running full length and an anodized Almag 35 aluminum base flange and a side feed termination band. This antenna's design supports transmitter power up to 1 kw.

Tools required: Crescent wrench or 1/2" open-end wrench


Installation Instructions

Choose a mounting location that is as free as possible from obstructions, and as far as possible from other antennas and other strong sources of RF.

1. Thread the Tip section onto the Base section's upper ferrule, including the lockwasher as shown in the diagram, and securely tighten.
2. Mount the antenna to a deck using a suitable hardware (not supplied) and the mounting holes in the aluminum base plate.
3. SSB antennas and transceivers require adequate grounding systems. Follow the radio manufacturer's instructions for connecting this antenna to your SSB radio system.

Tech Tip: This antenna will read "shorted" when tested with an ohm meter or continuity tester. The 50-ohm coaxial cable attached can be shortened as required. However, it should remain at least 3 feet (0.9 m) in length, measured from the point where the cable exits the antenna.

WARNING: Installation of this product near power lines is dangerous! Check for overhead wires before installing.

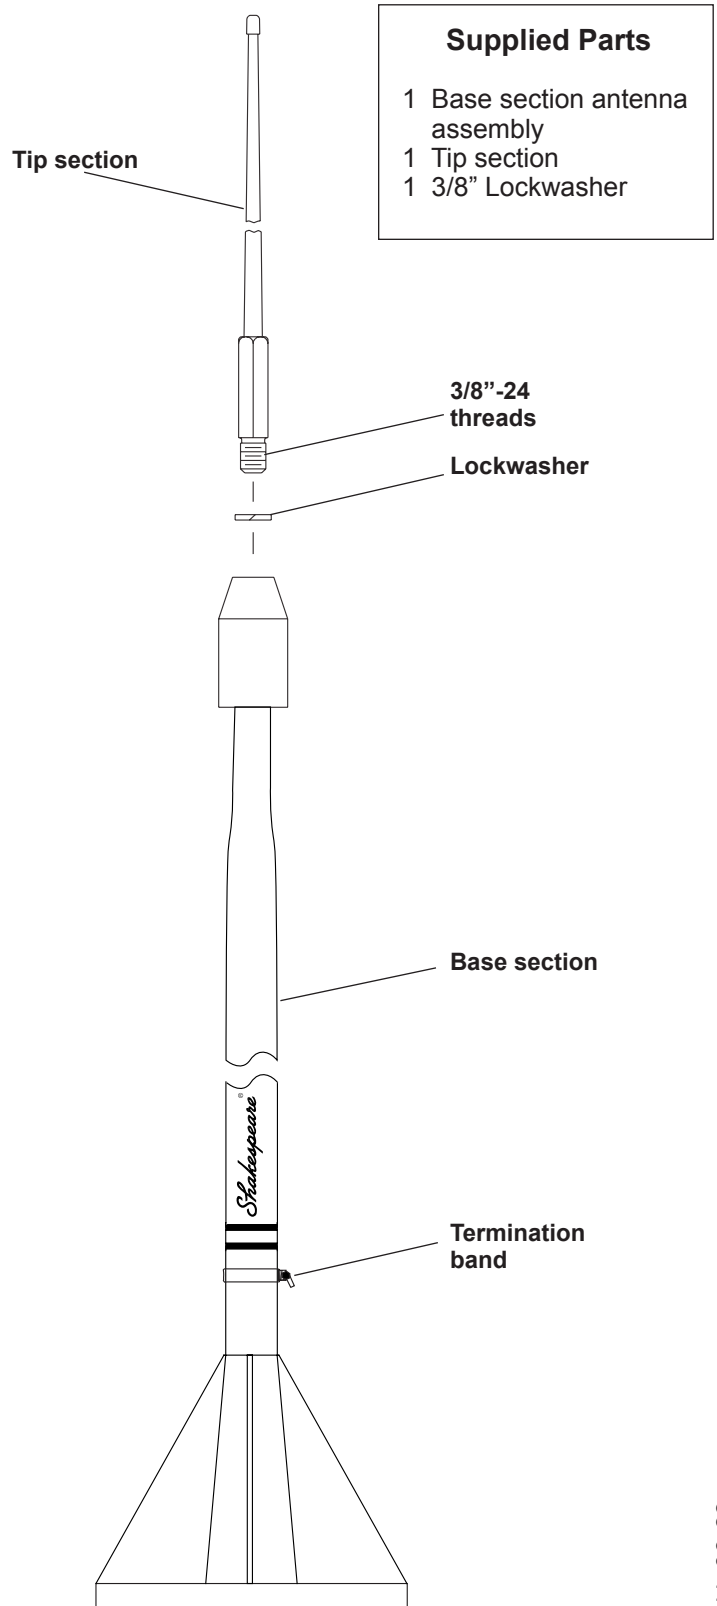

Supplied Parts	
1	Base section antenna assembly
1	Tip section
1	3/8" Lockwasher

Shakespeare Electronic Products Group

6111 Shakespeare Rd., Columbia, SC 29223 · 803-227-1590 · Fax: 803-419-3099

www.shakespeare-marine.com