

• PREAMPLIFIERS WITH FOLLOWING CODE MARKS DIFFER AS FOLLOWS:

\* CODE D AND BELOW - RESISTORS R10 AND R11 ARE .5 MEG.

\* CODE G ONLY INCLUDES C12

\* CODE J ONLY - C4 AND R9 OMITTED. SCREENS OF V1 AND V2 TIED TOGETHER. R8 IS 1.5 MEG. AND R7 IS 2700

\* CODE K - R8 AND R9 ARE 1.8 MEG. AND R7 IS 3300


\*\* CODE K ONLY 25V

\*\*\* CODE K ONLY 30V ON 250V SCALE

ALL VOLTAGES ARE + FROM GROUND UNLESS OTHERWISE NOTED

ALL DC VOLTAGES MEASURED WITH 20,000 OHMS-PER-VOLT METER

USED IN ALL VIBRATO CONSOLES, MODELS AV, BV, BC, CV, DV, AND RT

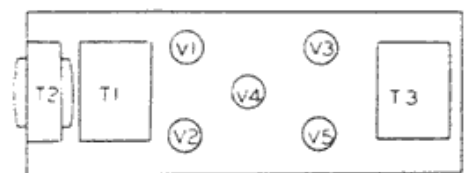

#### TRANSFORMERS

| NO. | NAME                  | PART NO.   |
|-----|-----------------------|------------|
| T1  | VIBRATO LINE          | AO-16908-1 |
| T2  | OUTPUT                | AO-16908-2 |
| T3  | HEATER 115V. 50-60CY. | AO-16907-1 |
| T3  | HEATER 230V. 50-60CY. | AO-16907-2 |
| T3  | HEATER 115V. 25CY.    | AO-16907-3 |

#### RESISTORS

| NO. | RESISTANCE | TYPE     | PART NO.   |
|-----|------------|----------|------------|
| R3  | .1 MEG.    | VARIABLE | AO-16532-0 |

FIGURE 6