


PEAVEY ELECTRONICS CORP.	
711 A STREET	
MERIDIAN, MISSISSIPPI 39301	
TITLE	CLASSIC 20
SIZE	B
CODE	NUMBER
PRINT	81501575
DATE	24-MAR-94
SHEET	1 OF 1

COPYRIGHT 1993 PEAVEY ELECTRONICS CORP. PRINTED IN U.S.A.

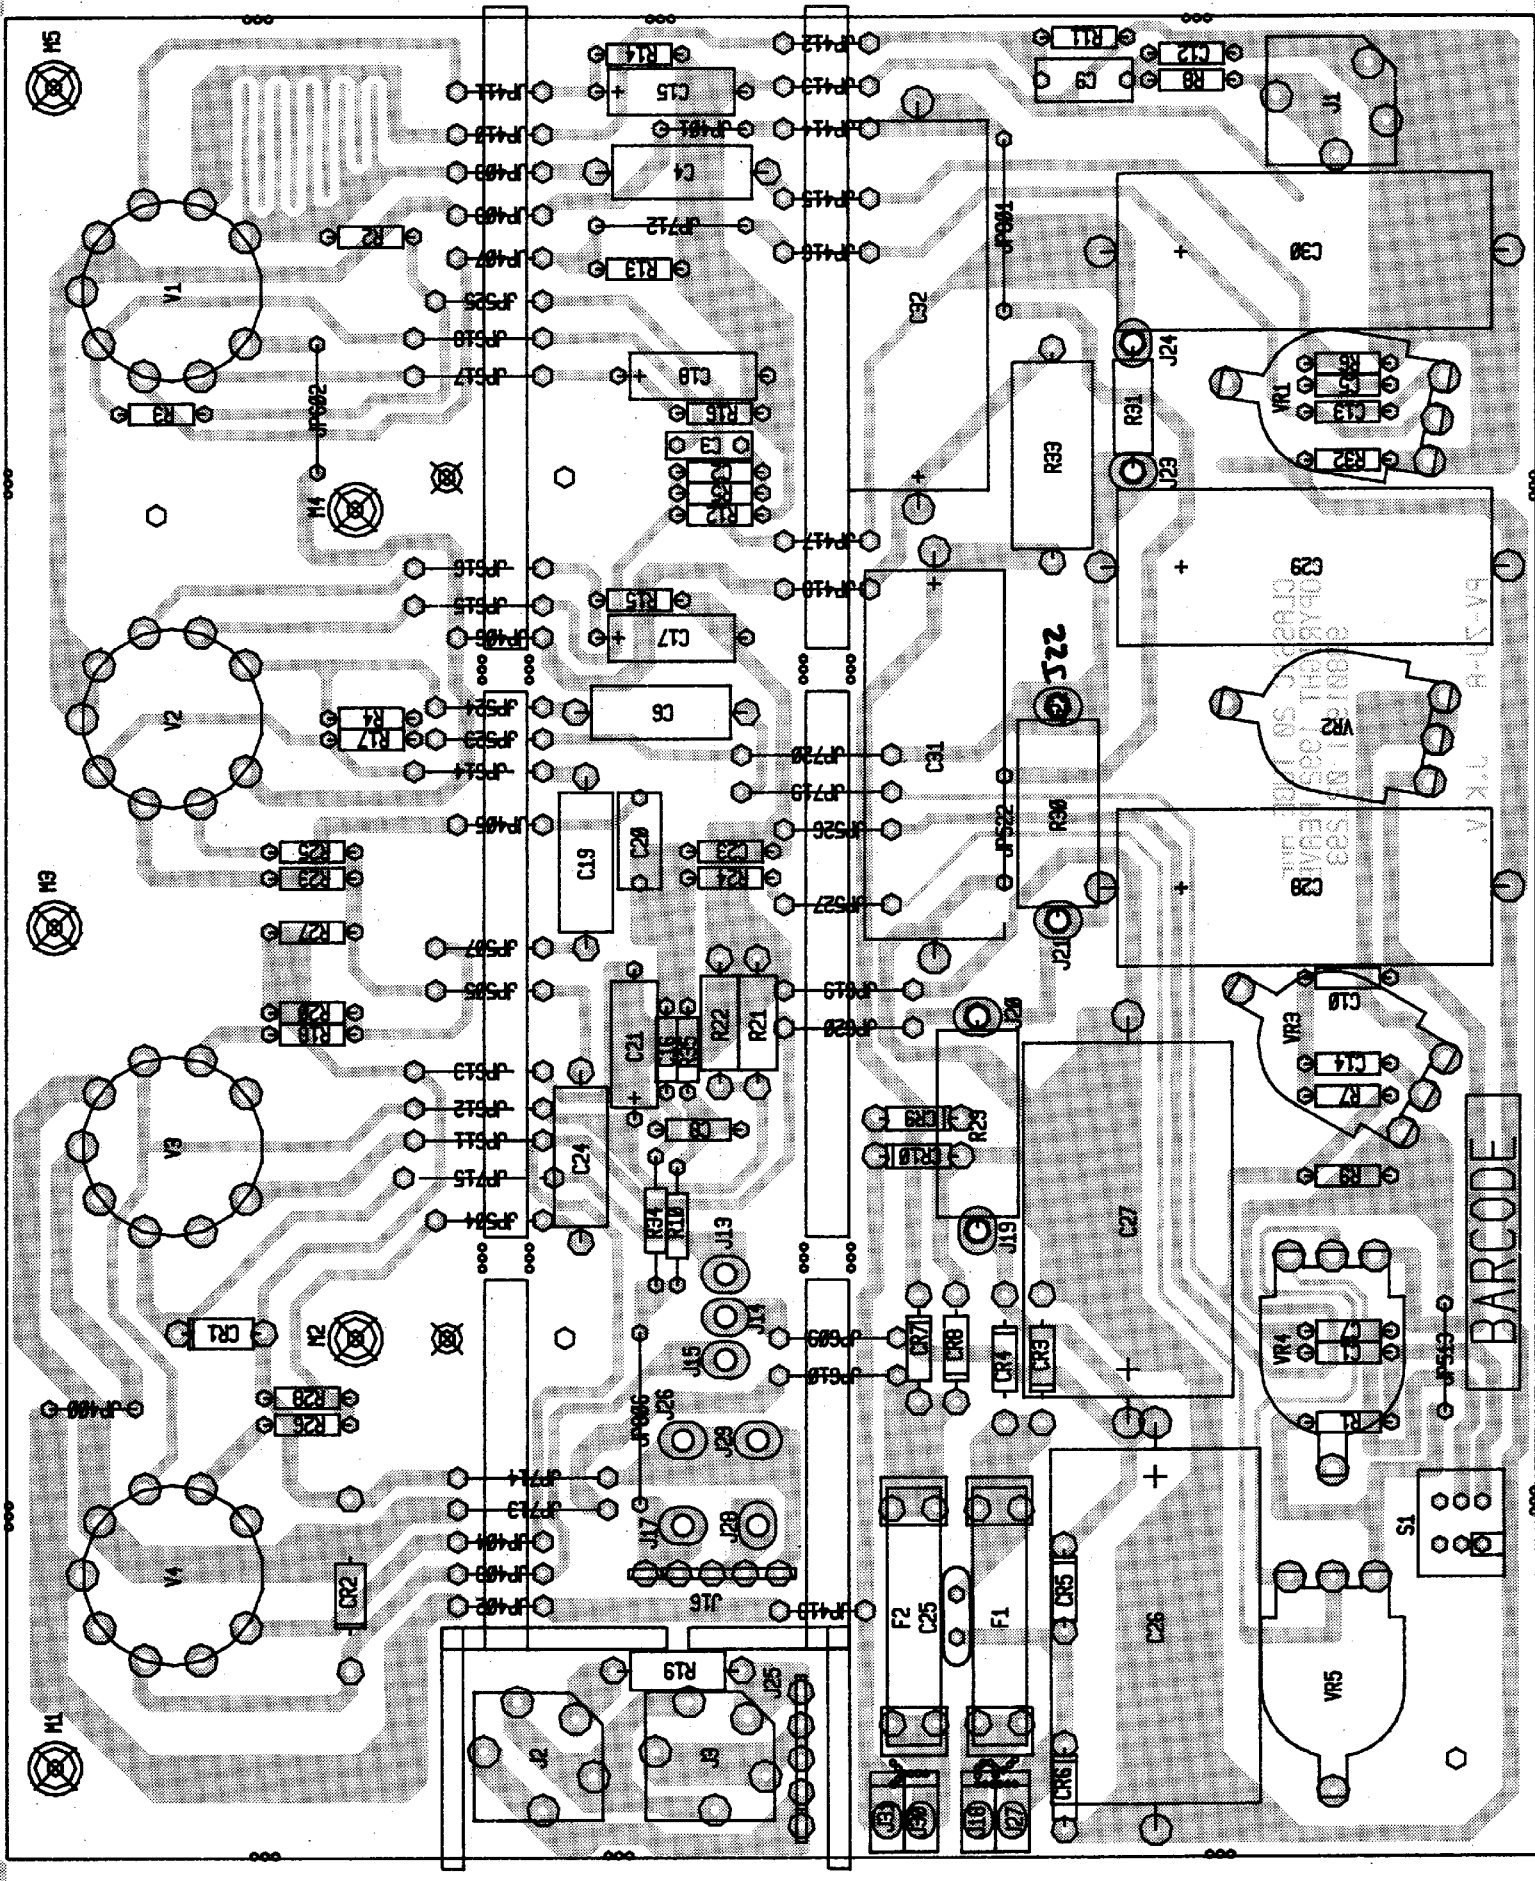

NAME	VALUE	NUMBER	DESCRIPTION
C1	.047	70340017	.047 MFD 10% 50V MON T&R
C10	.022	70340012	.022 MFD 10% 50V MON.T&R
C12	39PF	70340052	39PF 50V TUB CER T&R
C13	39PF	70340052	39PF 50V TUB CER T&R
C14	.022	70340012	.022 MFD 10% 50V MON.T&R
C15	22A25	70320012	22 MFD 25VDC LYT. CAP. T&R
C16	180PF	70340056	180PF 10% 50V TUB CER T&R
C17	22A25	70320012	22 MFD 25VDC LYT. CAP. T&R
C18	.47A50L	70340063	.47@50V LOW LEAKAGE
C19	.047A400	70320105	.047 MFD 400 V T&R CAP
C2	470PF	70340058	470PF 10% 50V TUB CER T&R
C20	.1R250MY	70320096	.1 MFD 250 VDC MYLAR CA/BR
C21	22A25	70320012	22 MFD 25VDC LYT. CAP. T&R
C23	100PF	70340054	100PF 10% 50V TUB CER T&R
C24	.047A400	70320105	.047 MFD 400 V T&R CAP
C25	.01CER	70320099	.01MFD 1000VDC CD-UNCUT
C26	47A500	70320005	47MF—10%-500VDC-EL-AX
C27	47A500	70320005	47MF—10%-500VDC-EL-AX
C28	22A450	70320020	22 MFD 450 VDC LYTIC CAP
C29	22A450	70320020	22 MFD 450 VDC LYTIC CAP
C3	.001R630	70320160	.001MF—5%—630V—MT R/W
C30	22A450	70320020	22 MFD 450 VDC LYTIC CAP
C31	2200A35	70320045	2200 MFD 35 VDC LYTIC CAP
C32	2200A35	70320045	2200 MFD 35 VDC LYTIC CAP
C4	.047A400	70320105	.047 MFD 400 V T&R CAP
C5	.0022	70340004	.0022 MFD 10% 50V T/C T&R
C6	.047A400	70320105	.047 MFD 400 V T&R CAP
C7	270PF	70340057	270PF 10% 50V TUB CER T&R
C8	.0068	70340008	.0068 MFD 10% 50V MON T&R
C9	.1R250MY	70320096	.1 MFD 250 VDC MYLAR CA/BR
CR1	SR2873	70402873	SR-2873 2KV.250MA SIL DIO
CR10	1N4003	70464003	1N4003 200V SILICON DIODE
CR2	SR2873	70402873	SR-2873 2KV.250MA SIL DIO
CR3	1N4007	70460007	1N4007 1KV.1A SIL. DIODE
CR4	1N4007	70460007	1N4007 1KV.1A SIL. DIODE
CR5	1N4007	70460007	1N4007 1KV.1A SIL. DIODE
CR6	1N4007	70460007	1N4007 1KV.1A SIL. DIODE
CR7	1N4003	70464003	1N4003 200V SILICON DIODE
CR8	1N4003	70464003	1N4003 200V SILICON DIODE
CR9	1N4003	70464003	1N4003 200V SILICON DIODE
F1	1AFB	70900085	FUSE AGC 1
F2	6AFB	70900319	ABC 6 AMP FUSE 250V
J1	HIDMNI	71466214	2 TIP HID JACK NINS W/SPD
J2	HIDSI	71466216	STEREO HID JACK INSU W/SP
J3	HIDSNI	71466217	STEREO HID JACK NINS W/SP
R1	220K	70240036	220K—1/4W—5%—CF—T&R
R10	470K	70240038	470K—1/4W—5%—CF—T&R
R11	470K	70240038	470K—1/4W—5%—CF—T&R
R12	470K	70240038	470K—1/4W—5%—CF—T&R
R13	330K	70240037	330K—1/4W—5%—CF—T&R
R14	1.5K	70240018	1500—1/4W—5%—CF—T&R
R15	1K	70240017	1K—1/4W—5%—CF—T&R
R16	1.5K	70240018	1500—1/4W—5%—CF—T&R
R17	68K	70240032	68K—1/4W—5%—CF—T&R
R18	47K	70240031	47K—1/4W—5%—CF—T&R
R19	100W1	70210003	100—1W—5%—MO—T&R
R2	150K	70240035	150K—1/4W—5%—CF—T&R
R20	220K	70240036	220K—1/4W—5%—CF—T&R
R21	220W1	70210019	220—1W—5%—MO—T&R
R22	220W1	70210019	220—1W—5%—MO—T&R
R23	1M	70240039	1M—1/4W—5%—CF—T&R
R24	220K	70240036	220K—1/4W—5%—CF—T&R
R25	1.5K	70240018	1500—1/4W—5%—CF—T&R
R26	47K	70240031	47K—1/4W—5%—CF—T&R
R27	68K	70240032	68K—1/4W—5%—CF—T&R
R28	220K	70240036	220K—1/4W—5%—CF—T&R
R29	400W5FP	70250020	400—5W—10%—FP 67—AXL
R3	150K	70240035	150K—1/4W—5%—CF—T&R
R30	4KW5	70250050	4K—5W—10%—WW—AXL
R31	10KW1	70210018	10K—1W—5%—MO—T&R
R32	47FP	70240090	47FP—1/4W—5%—FP—T&R
R33	1W5	70250056	1—5W—5%—WW—AXL
R34	470K	70240038	470K—1/4W—5%—CF—T&R
R35	2.2M	70240040	2.2M—1/4W—5%—CF—T&R
R4	100K	70240034	100K—1/4W—5%—CF—T&R
R5	470K	70240038	470K—1/4W—5%—CF—T&R
R6	1M	70240039	1M—1/4W—5%—CF—T&R
R7	68K	70240032	68K—1/4W—5%—CF—T&R
R8	47K	70240031	47K—1/4W—5%—CF—T&R
R9	2.2M	70240040	2.2M—1/4W—5%—CF—T&R
S1	SUZPP	71322251	SUZ P/P SWITCH PC MOUNT
V1	12AX7	70806612	12 AX7/ECC 83 TUBE
V2	12AX7	70806612	12 AX7/ECC 83 TUBE
V3	EL84	70806623	EL-84 TUBE
V4	EL84	70806623	EL-84 TUBE
VR1	1MAMSP5	71190313	1 MEG AUD 5% MET SPIDER
VR2	1MAMSP5	71190313	1 MEG AUD 5% MET SPIDER
VR3	20KSMS	71190326	20K S TAP MET SPIDER
VR4	250KBMS	71190302	250K LIN METRIC SPIDER
VR5	POT0303	71190303	1 MEG AUD 20% MET SPDR 1MM