

Serial Number
A-10,001 to

R1	SW-998-1	Switch
S2	SW-575	Foot Pedal Switch
O1	S-20006	Speaker 10", 8 ohms
D1	PL-35A	Pilot Light (Red)
D1, D2	DI-404	Diode 600 PIV

T1	TF-105P	Power Transformer
T2	TF-18-01	Output Transformer
T3	TF-1001D	PP Driver Transformer
R10, R18	ORA-611-3701	Control 250K Audio
R9	ORA-611-3702	Control 2 meg Audio
R17	ORA-611-3711	Control 1.5 meg RA
R7	ORA-613-222	Control 2 meg RA tapped

INSTRUCTIONS

When only one instrument is used, plug into No. 1 input jack.



The Tremolo effect is turned on by the Pointer knob marked "Frequency" located on the Control Panel. The speeds have been set to cover a wide range of Tremolo effects.

This amplifier is designed for 105-125 volt, 50-60 cycle current. Damage will result if connected to improper power source.

Use the above schematic to facilitate service by a reliable radio man.

Do not use higher rating fuse than 1.5 ampere, type 3 A.G.

This amplifier was carefully checked and in good playing condition when shipped. If damaged when received call transportation company immediately and place claim.

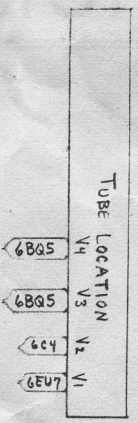

X D.C. LOAD CURRENT
90MILS @ ZERO SIGNAL.
105MILS @ 12.5 WATTS OUTPUT.