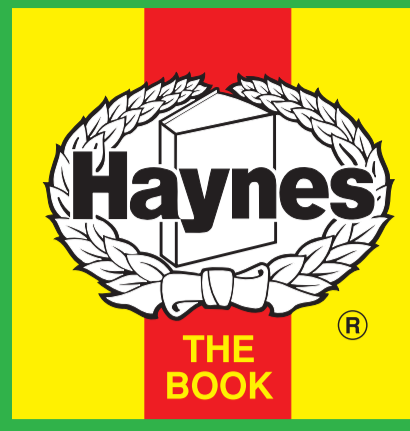


[Engine & Cooling](#)
[Fuel](#)
[Ignition](#)
[Electrical](#)
[Running gear](#)
[Torque settings](#)
[Capacities](#)
[Notes & Illustrations](#)


# Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

[MENU](#)
[HELP](#)

## Engine and cooling system Megane 1.4 (BAOE) 1996 to 1997

Type	E7J 764 SOHC 8V EC96	
Capacity (cm <sup>3</sup> ) / number of cylinders	1390 / 4	
Compression ratio / pressure	bar	9.5 /
Oil pressure	bar	1.0 (3.0)
Oil temperature	°C	80
Valve clearance - inlet	mm	0.10
Valve clearance - exhaust	mm	0.25
Firing order	1-3-4-2	
No 1 cylinder position	FE	
Thermostat opening temperature	°C	89
Radiator cap pressure	bar	1.2

## Fuel system Megane 1.4 (BAOE) 1996 to 1997

Idle speed - manual [auto]	rpm	750±50 N/A
Fast idle speed - manual [auto]	rpm	—
CO @ idle speed [3000 rpm] - see page VI	%	N/A
HC @ idle speed [3000 rpm] - see page VI	ppm	—
CO <sub>2</sub> @ idle speed [3000 rpm] - see page VI	%	≥14.5
O <sub>2</sub> @ idle speed [3000 rpm] - see page VI	%	—
Carburettor / fuel injection	_Siemens Bendix	
Type / ref	Fenix 3 Monopoint	
Main jet / needle	—	
Injection pressure	bar	1.06
Pump pressure	bar	—
Octane rating	RON	95[U]

## Ignition system Megane 1.4 (BAOE) 1996 to 1997

Type	Fenix	
Ignition coil	—	
Primary resistance	ohms	—
Ballast resistor	ohms	—
Voltage - Tmnl 15(+) to earth	V	—
Distributor	—	
Points gap (air gap)	mm	—
Dwell angle	° (%)	—
Condenser capacity	µF	—
Rotation	—	
Ignition timing - basic [static	° Crankshaft @ rpm	N/A
V = Vacuum NV = No Vacuum	—	
Total ignition advance	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Centrifugal check.	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Vacuum range check	mbar	—
Maximum vacuum advance	° Crankshaft	—
Spark plugs	Eyquem/NGK	
Type	FC52LS / BCP5ES	
Electrode gap	mm	0.9

## Electrical system Megane 1.4 (BAOE) 1996 to 1997

Battery	V / CC / RC	—
Alternator voltage / full load current / engine rpm	14.8 / 80, 100	
Starter motor current / voltage - cranking	A / V	—
- locked	A / V	—

## Running gear Megane 1.4 (BAOE) 1996 to 1997

<b>Brakes -</b>		
Front (min. friction material thickness)	mm	7.0 with backing
Rear (min. friction material thickness)	mm	—

<b>Tyres</b>		
Saloon	Size	175/70x13
Estate / Van	Size	—
Pressure - front / rear - Saloon	bar	2.3 / 2.2
- Estate / Van	bar	—

## Front suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	(-0°10'±10')
Camber	-0°08'±30' PAS: -0°20'±30'	
Castor	2°±30' PAS 4°±30'	
King pin inclination	13°01'±30' PAS: 13°21'±30'	

## Rear suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	(+0°50'±20')
Camber	-1°±15'	


## Torque wrench settings Megane 1.4 (BAOE) 1996 to 1997

Cylinder head - stage 1	Nm	20 oiled
- stage 2	Nm	+97°±2°, wait 3 mins
Cylinder head - stage 3	Nm	Slacken 20 +97°±2° in turn
- stage 4	Nm	—
Big-end bearings	Nm	40 to 45
Main bearings	Nm	60 to 65
Clutch cover	Nm	18
Flywheel [driveplate]	Nm	50 to 55
Front hubs	Nm	250
Rear hubs	Nm	160
Wheel nuts / bolts	Nm	90
Spark plugs	Nm	25 to 30

## Capacities Megane 1.4 (BAOE) 1996 to 1997

Engine oil & filter	litres	4.0
Gearbox - 4-speed [5-speed]	litres	3.4
Automatic transmission - refill	litres	—
Final drive	litres	WT
Cooling system	litres	6.0
Fuel tank	litres	60

## Notes and Illustrations

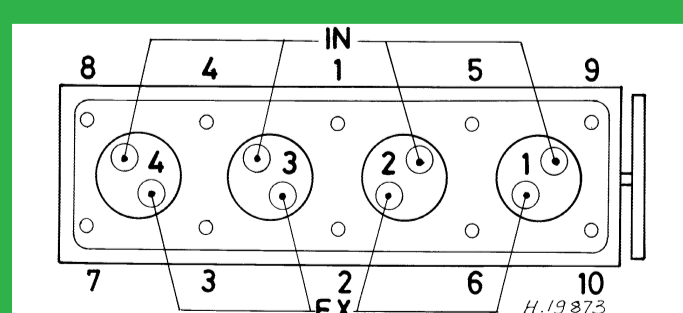

1390 cm<sup>3</sup> 8V