



# SERVICE BULLETIN

from: TRIO-KENWOOD COMMUNICATIONS, INC.

42


SUBJECT: TS-180S IF OUTPUT #2 LEVEL CHANGE FOR SM-220 OPERATION

DATE 7/10/79

TS-180S owners who desire to operate an SM-220 for IF output display will require a wiring change to the IF unit X48-1240-00. No additional parts and no adjustments are required.

Remove R77, 470 ohm, and replace with wire jumper. Remove R78, 56 ohm, and replace with old R77. The 56 ohm resistor is not used.

With AGC on, gain should be adequate for about a 3/4 screen display.

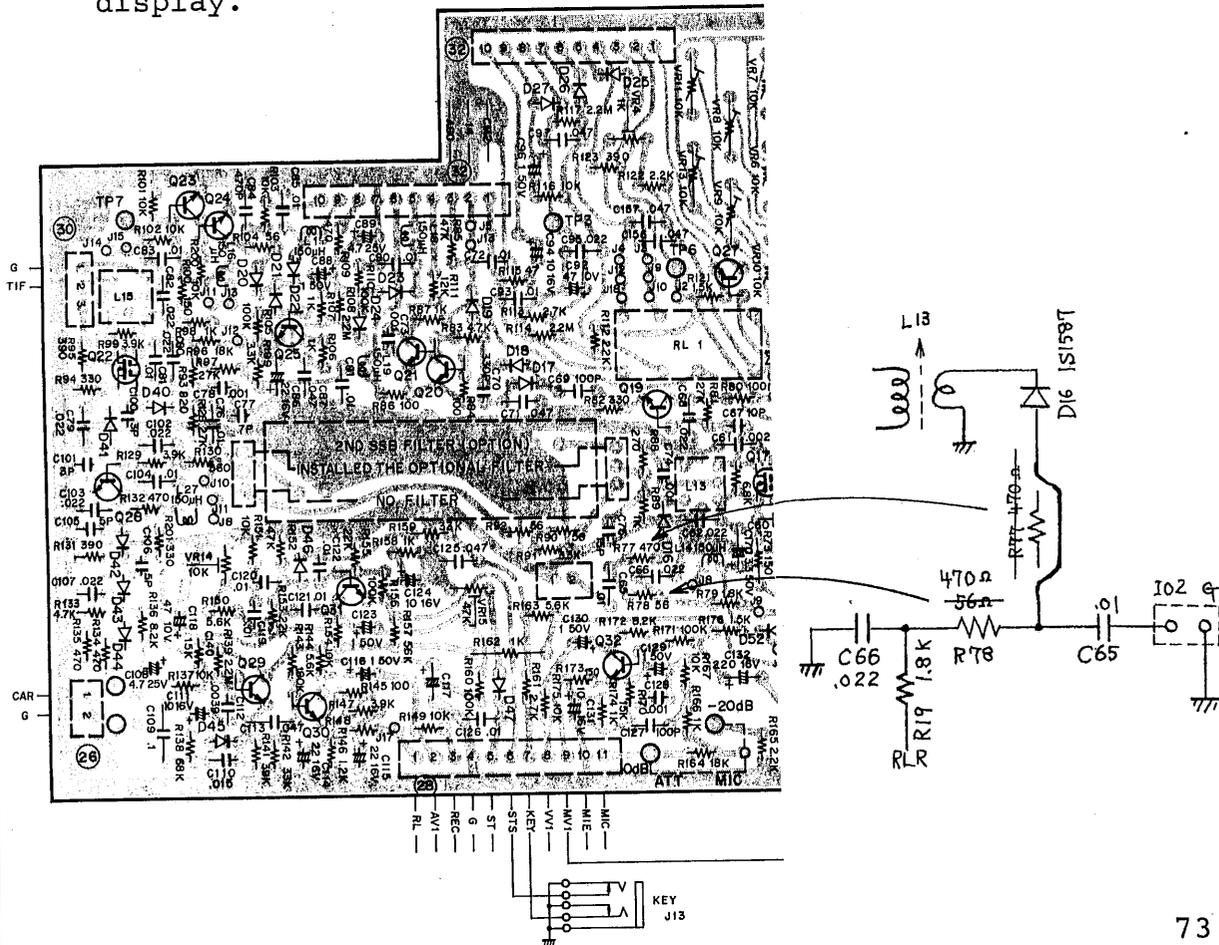

JEB/Yn

73