


KENWOOD TS-790A

EXPANDED RF

1. Disconnect the power and antenna.
2. Remove the top cover.
3. Locate circuit board positioned vertically behind the front panel.
4. Locate and remove diodes 29 & 30.
5. Reassemble radio
6. Reset the microprocessor. (Press and hold [A=B] and turn power on)

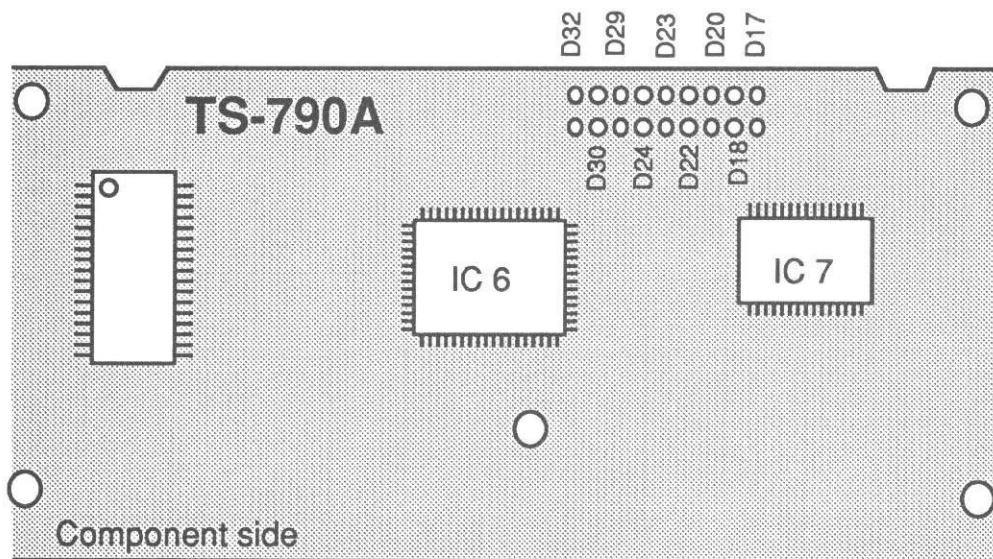

Note: Factory diode set-up: IN-D22,29,30,32
IN but clipped by factory-D23,24
Empty position=D17,18,20

RANGE: 130-170 MHz & 422.2-463 MHz



Caution

These modifications have not been tested. The Author, Publisher and all other parties takes NO responsibility or liability for any damage or violation resulting from these modifications. Performing any modification may be a Violation of FCC Rules and will void the warranty of the radio. Use of any modified radio may be a violation of FCC rules. If you have any doubts, DO NOT PERFORM THIS MODIFICATION.

© 1991 artsci inc. all rights reserved. (818) 843-4080 Fax: (818) 846-2298