


Downloaded by  
RadioAmateur.EU

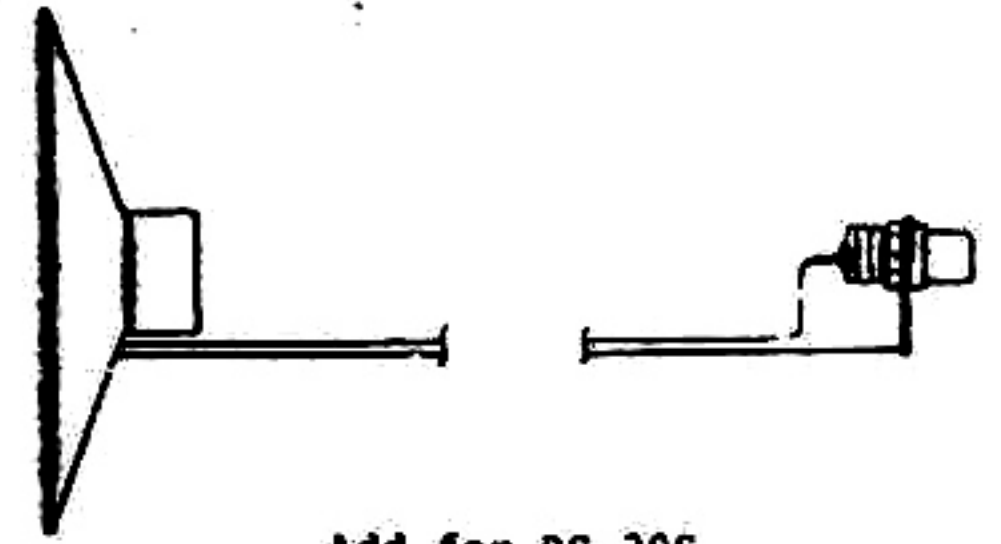

Add for RS-20S

- UNLESS OTHERWISE NOTED
1. ALL RESISTORS 5%, 0.5W, C.F. IN OHM.
  2. ALL CAPACITORS IN MICROFARADS.
  3. PRINTED CIRCUIT BOARD.
  4. C7-C9 ADDED FOR R.F BY PASSING
  5. RX TO BE SELECTED IN TEST.

A1 VOLTAGE

PIN#	NO LOAD	FULL LOAD
2	13.1V	14.0V
3	13.8V	13.7V
4	7.2V	7.2V
5	7.2V	7.2V
6	7.2V	7.2V
7	0.0V	0.0V
10	14.8V	18.5V
11	29.0V	25.0V
12	29.0V	25.0V
13	18.1V	17.8V

**ASTRON CORPORATION**  
IRVINE, CALIFORNIA

DATE: 9-24-88      APPROVED: *[Signature]*

RS-20A, RS-20S