


UNIDEN PRESIDENT "JACKSON" (Export Model)

- VR1-S/Meter
- VR2-Sq range
- VR3-Mod Meter
- VR4-FM Dev.
- VR5-Car. Bal.
- VR6-TX Freq.
- VR7-RF Meter
- VR8-ALC
- VR9-Final Bias
- VR10-Driver Bias
- VR11-AM PWR
- VR12-AMC

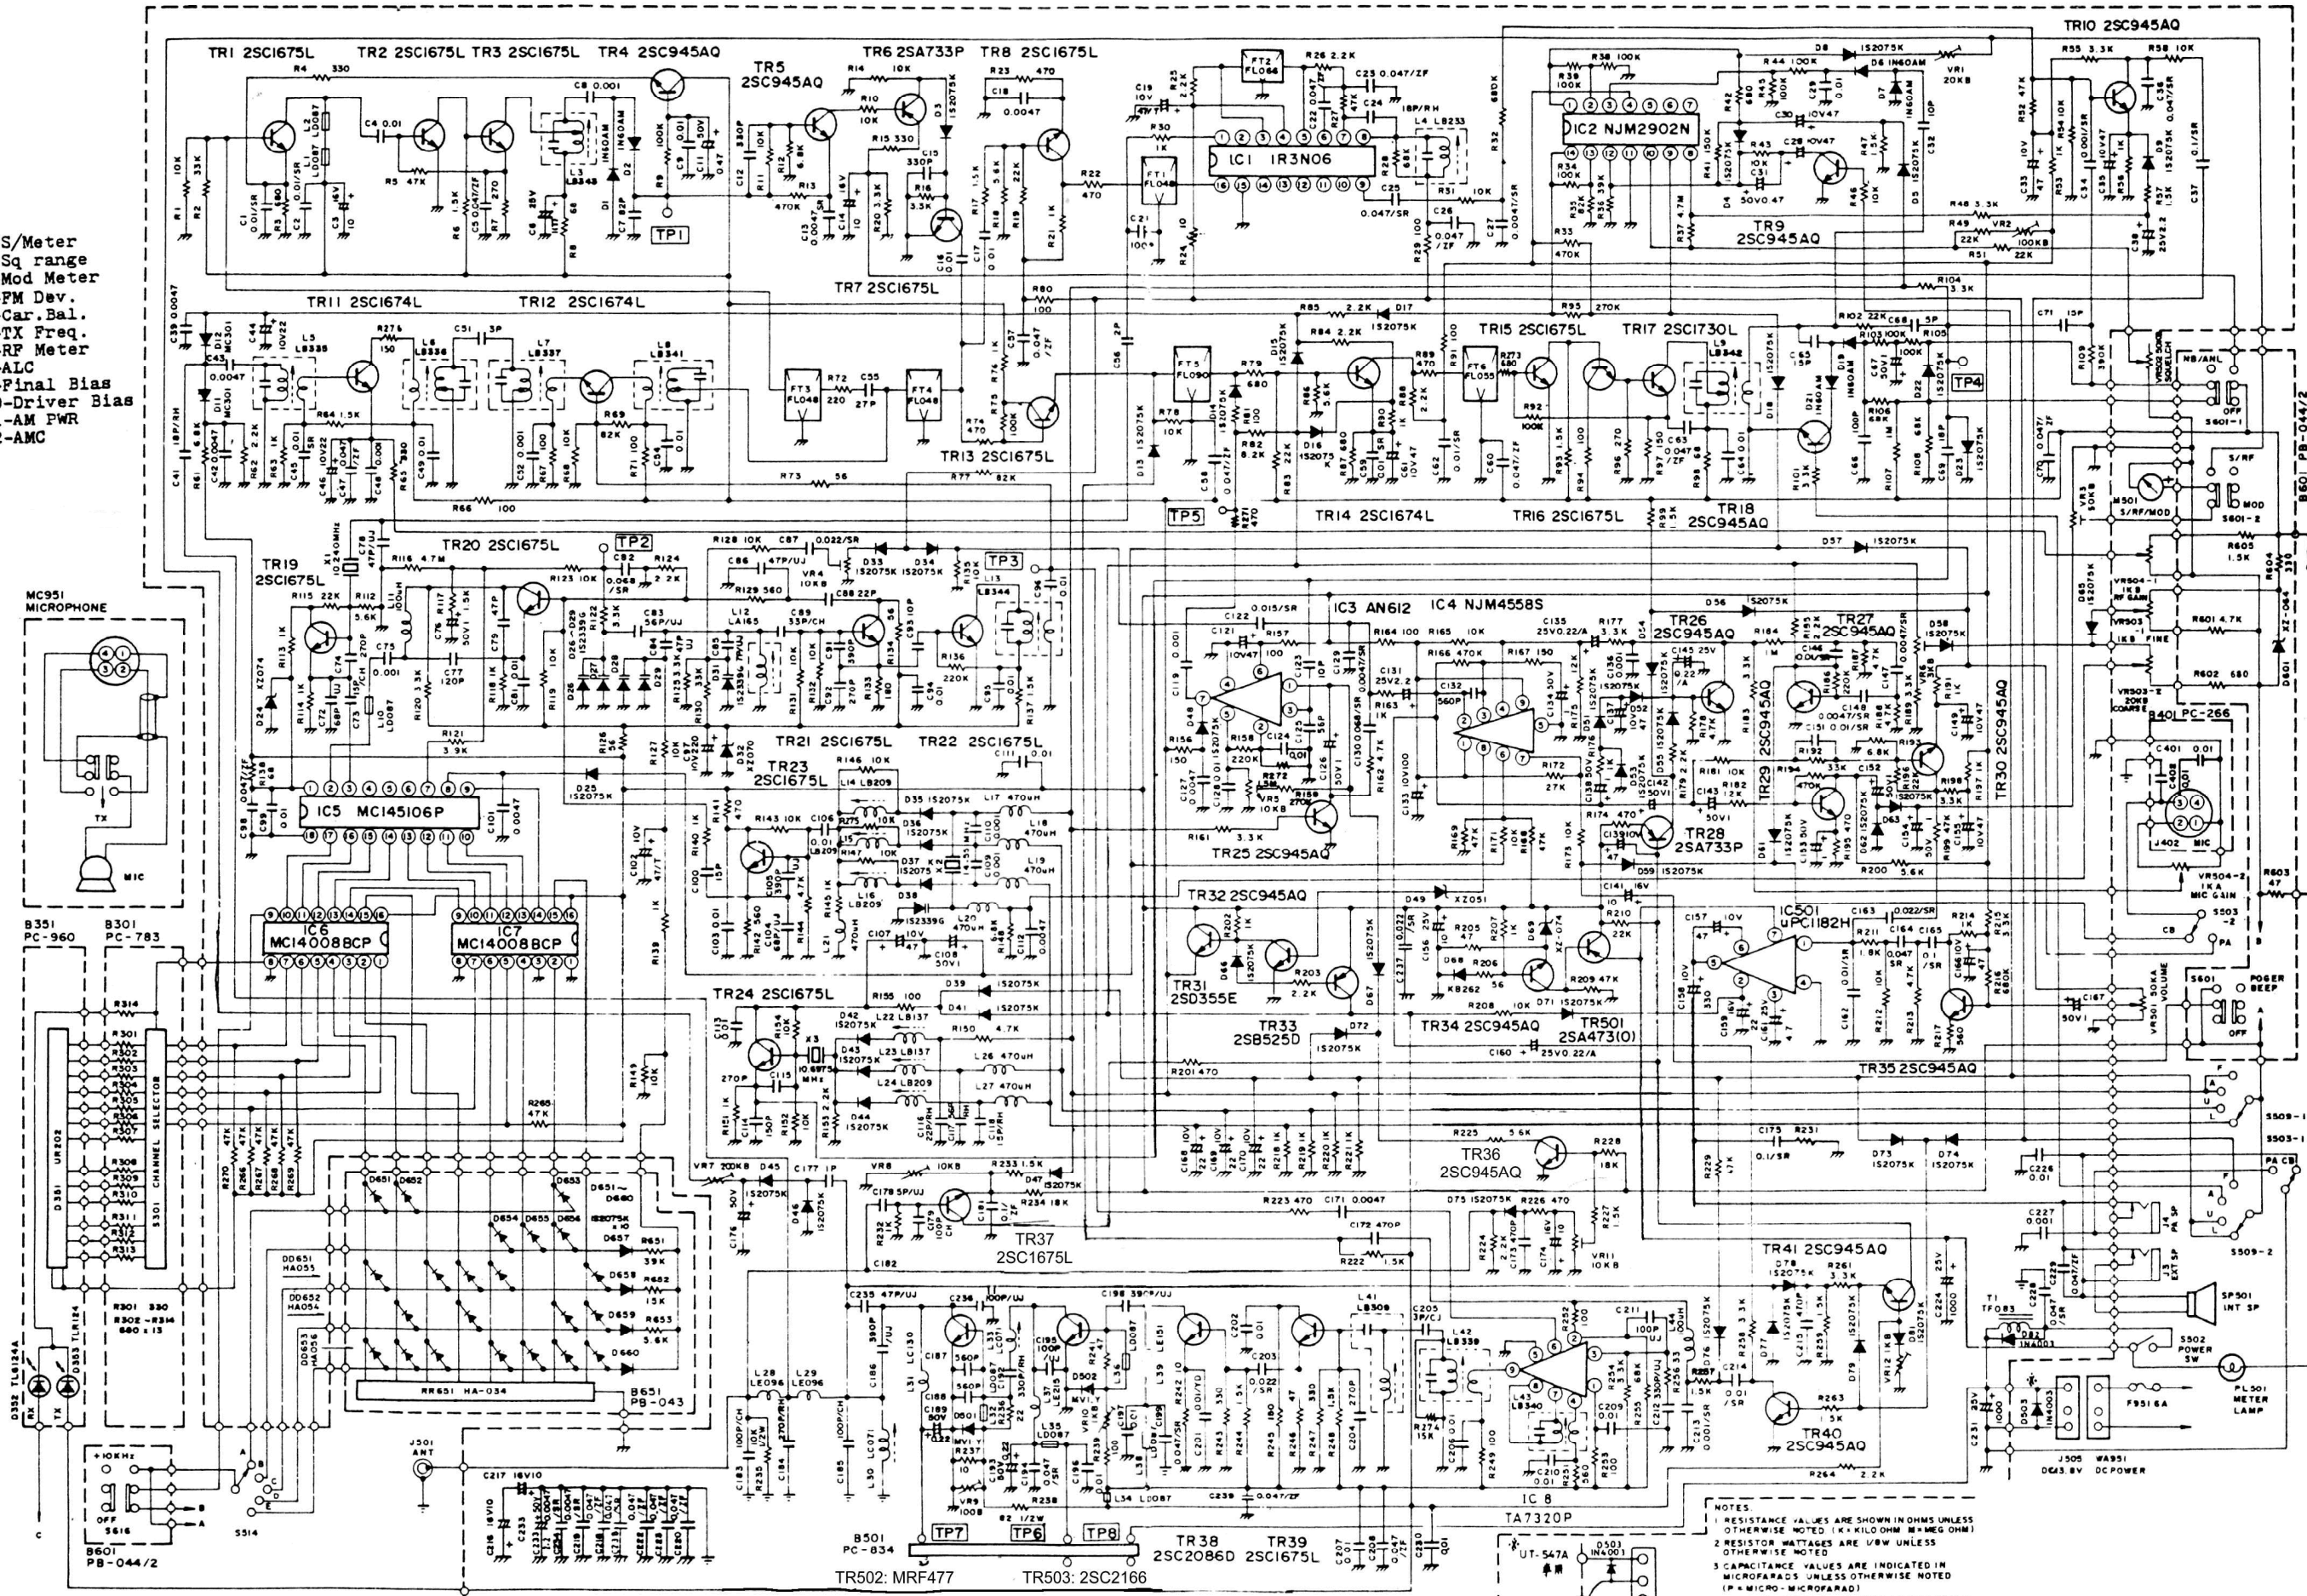

- NOTES
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED (K = KILOHM, M = MEG OHM)
 2. RESISTOR WATTAGES ARE U/W UNLESS OTHERWISE NOTED
 3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED (P = MICRO-MICROFARAD)
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE 5% LESS THAN 1000PF OR 10% IF MORE THAN 1000PF UNLESS OTHERWISE NOTED

B351 PC-960
B301 PC-783
B501 PC-834
B601 PB-044/2
B601 PB-042

B601 PB-044/2

S509-1
S503-1
S509-2
S503-2

J505 WA851
DC 13.8V