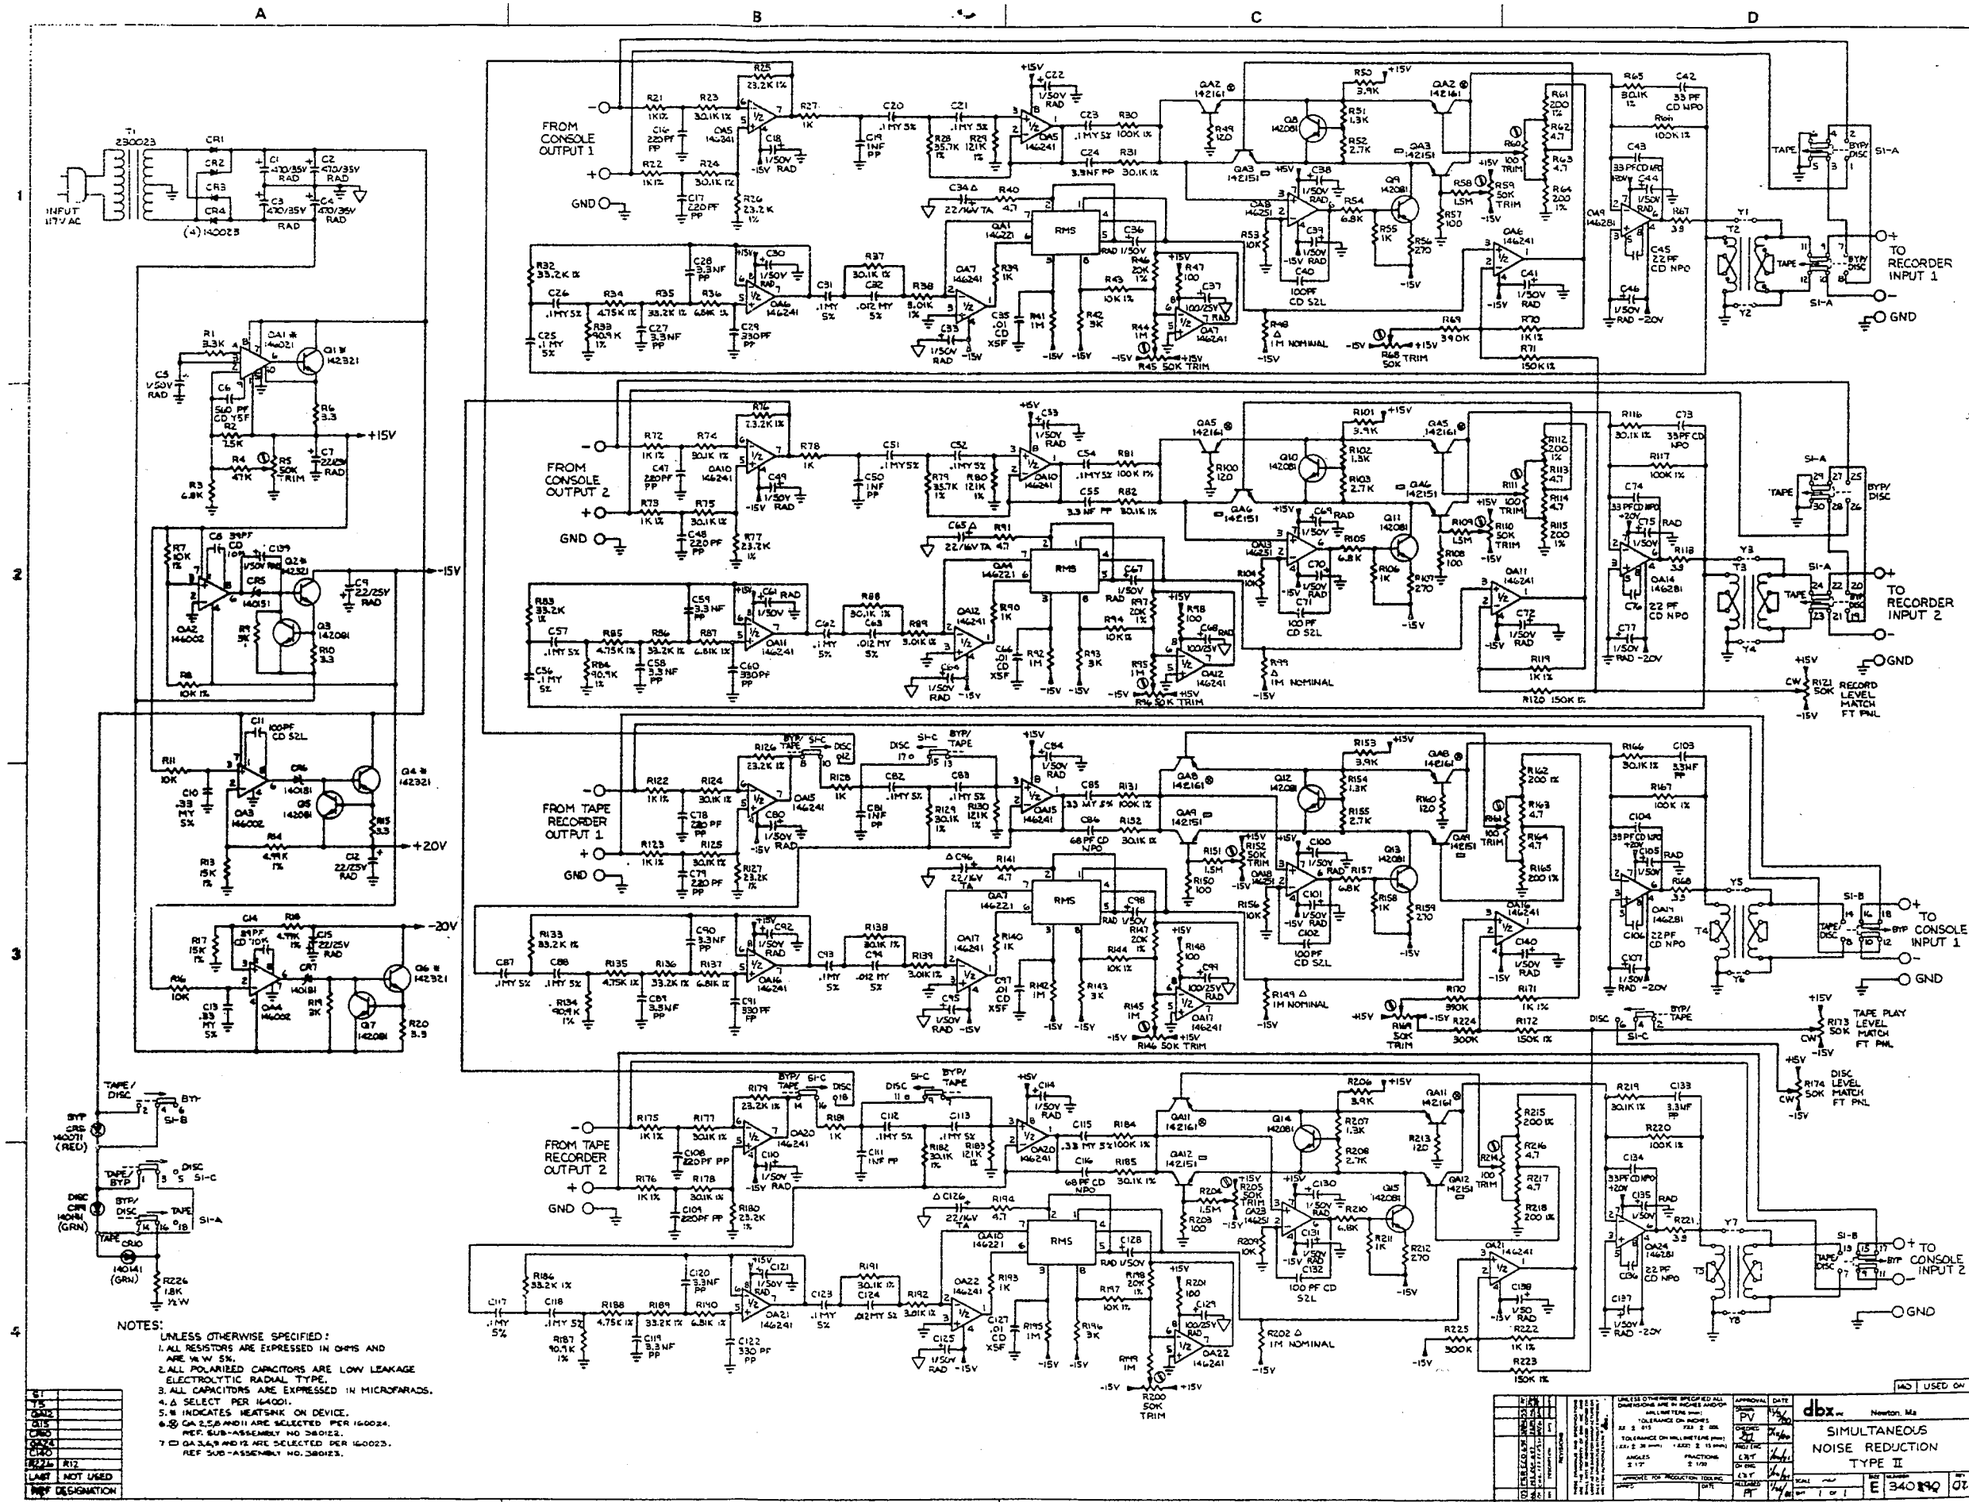
FROM CONSOLE OUTPUT 1
FROM CONSOLE OUTPUT 2
FROM TAPE RECORDER OUTPUT 1
FROM TAPE RECORDER OUTPUT 2
GND
INPUT 117V AC
(4) 140023
TO RECORDER INPUT 1
TO RECORDER INPUT 2
TO CONSOLE INPUT 1
TO CONSOLE INPUT 2
RECORD LEVEL MATCH FT PNL
TAPE PLAY LEVEL MATCH FT PNL
DISC LEVEL MATCH FT PNL
RMS
+15V
-15V
+20V
-20V
NOTES:
UNLESS OTHERWISE SPECIFIED:
1. ALL RESISTORS ARE EXPRESSED IN OHMS AND ARE 1/4 W 5%.
2. ALL POLARIZED CAPACITORS ARE LOW LEAKAGE ELECTROLYTIC RADIAL TYPE.
3. ALL CAPACITORS ARE EXPRESSED IN MICROFARADS.
4. Δ SELECT PER 164001.
5. ※ INDICATES HEATSINK ON DEVICE.
6. ⊗ QA 2,5,8 AND 11 ARE SELECTED PER 160024. REF SUB-ASSEMBLY NO 380123.
7. ⊙ QA 3,6,9 AND 12 ARE SELECTED PER 160023. REF SUB-ASSEMBLY NO. 380123.
dbx inc. Newton, Ma
SIMULTANEOUS NOISE REDUCTION TYPE II
E 340890

140