

Service Manual

200MB

GK GALLIEN-KRUEGER

Table of Contents

Operating Instructions	3
Turn On / Calibration Procedure	6
Schematics	9
Engineering Change Orders (ECOs)	18
Bill of Materials	19

Operating Instructions 200MB/200RCB

The Basics

Your new G-K Bass amplifier represents the latest advances technology has to offer. With a built in limiter, chorus, 4 band EQ, two voicing filters and a master volume; the number of different sounds available is endless.

A careful examination of this manual will help you get the most from them.

LEFT TO RIGHT ON THE FRONT PANEL

Input Jack

The input jack is a standard $\frac{1}{4}$ " jack capable of handling a wide variety of signal levels up to 9v RMS.

Volume

This knob controls preamp volume and limiter threshold. This will control your overdrive sound or sustain when limiter is on.

Voicing Filters

The contour switch "rounds" out the tone by putting a dip in the midrange frequencies and boosting the bass and treble.

The high-boost switch boosts the high frequencies for a brighter sound. Also can be used to "liven" up old and worn strings.

4 Band EQ

1. The first knob is an active treble control operating at 4.0 kilohertz. It adds high end and brightness to your sound.
2. The second knob is an active high mid-range control operating at 1.0khz. This controls the punch and definition of your tone.
3. The third knob is an active low mid-range operating at 250hz. This adds to the meat or body of your sound.
4. The last EQ knob is an active bass control operating at 60hz. This controls the bottom end or boom of your sound.

Limiter

With the master up full the limiter will prevent the power amp from distorting.

With the master on lower settings, the limiter will give you smooth distortion free sustain, with the level controlled by the master setting. Raising the volume level increases sustain.

It is possible to drive the preamp into distortion by raising the volume control too high, even when the limiter is on.

Master

The master volume controls the total output from off to full power.

Chorus on/off

The chorus is a fully adjustable, studio quality effect unit built right into your amp. It incorporates a high technology IC chip to give a full chorus enhancement of your sound.

Phones

The phones jack is a $\frac{1}{4}$ " stereo jack. It delivers a stereo signal for use with high impedance head phones (600 ohm or greater). Plugging into the phones jack does not disconnect the speakers. To disconnect the speakers use the switch on the rear panel.

Effects Loop

The effects loop is provided for the insertion of external effects. It is post EQ and pre internal effects. Using standard guitar cords, connect the send of the amp to the input on the effect unit; connect the output of effect to the return on the amp. The level is 150 mv with master up full.

Direct Outs

Both wet and dry low impedance direct outs are provided with your amp for professional recording capabilities. The wet direct signal contains effects and is controlled by the master volume. The dry direct has no effects and is not affected by the master volume.

Internal Speaker on/off (200MB)

You have the ability to turn off the internal speaker with this switch.

External Speaker Jack

This jack is for use with an external speaker cabinet. With the internal speaker on, you can add an 8 ohm load. With the internal speaker off, you can add a 4 ohm load.

Power Switch

The power switch on the 200MB is on the rear panel. The power switch on the 200RCB is on the front panel lower right.

Power Cord

The power cord is detachable and plugs into a socket on the rear panel. If a replacement cord is used or needed it should be UL rated at 10 amp, 125v; or if using 240v, the cord should be UL rated at 5 amp, 240v.

Fuse

Never operate your MB or RCB with any other than the recommended fuse.

115v operation – type TSC2A

240v operation – type TSC1A


Maintenance

Your new amplifier is rugged. It was built to give you a lifetime of trouble free operation. If it is operated with care, your only maintenance problems should be cleaning. We recommend a soft damp cloth and mild soap for cleaning outside surfaces. Your amp can be serviced at any GK authorized service center or at the GK factory if needed.

Extension Speakers


200MB

With Internal Speaker On

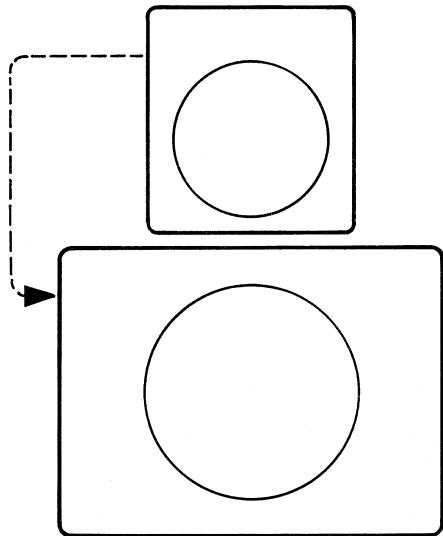


8 ohms

With Internal Speaker Off

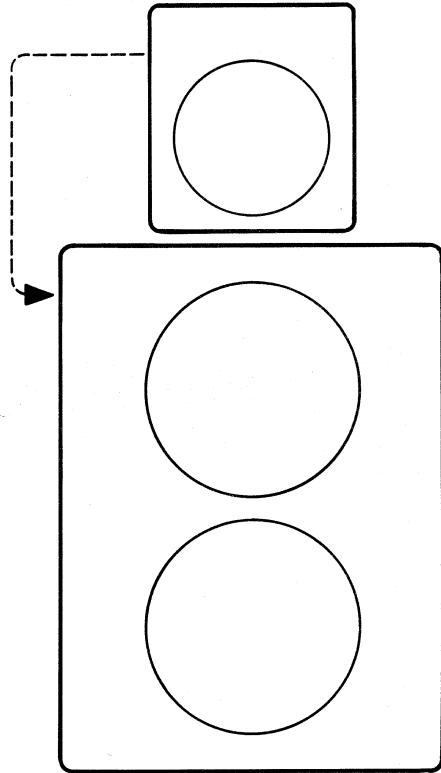


4 ohms

200RCB

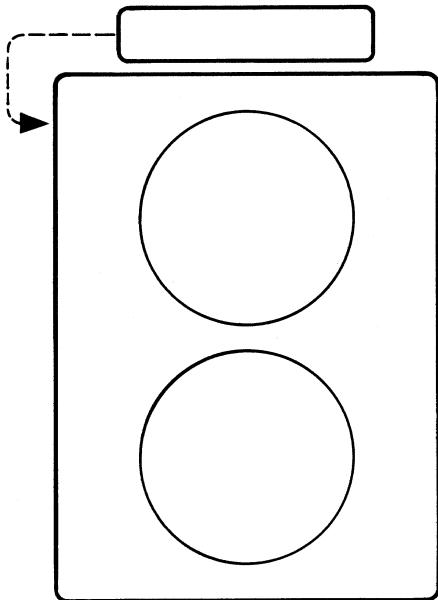

4 ohms

200MB MIC STAND BRACKET

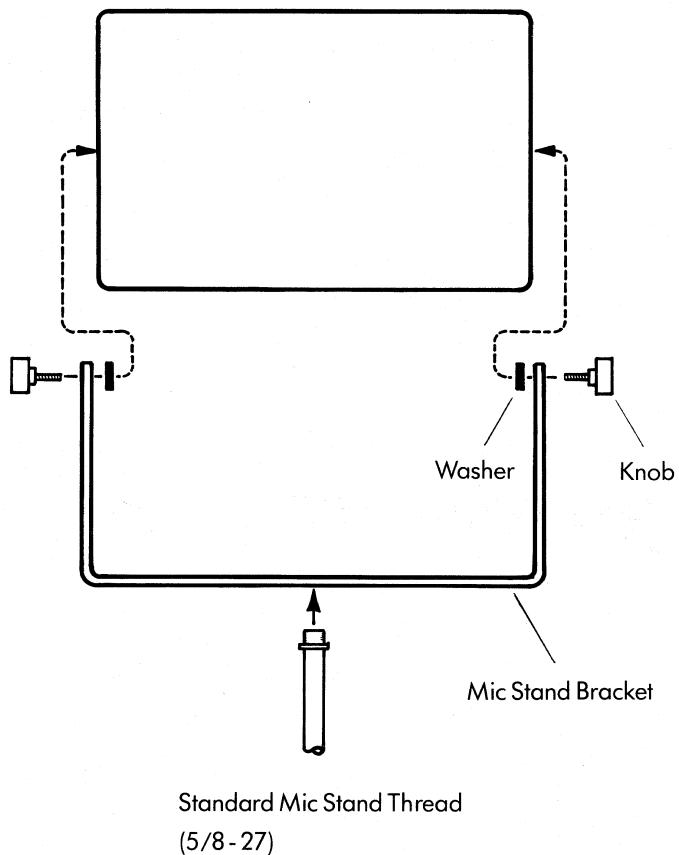

200MB & 200RCB Specifications

Max Input Level

9v rms

Sensitivity (400hz)

4mv

Power

100w @ 4 ohms

Effects Send

750mv rms into 22k for full power

Effects Return

750mv rms into 12k for full power

Extension Speakers

200MB 8 ohms with internal spkr on

4 ohms with internal spkr off

200RCB 4 ohms

200MB

200RCB

Weight

241 lbs.

10 lbs.

Dimensions

13.75" x 15"

17.5" x 3.5"

Speakers

1 x 12"

N/A

200MB/RCB T/O Procedure


Rev.B- 3/7/88

- 1) Inspect board.
- 2) Connect mains.
- 3) Observe the following:
 - A) no load E) volume on 0 I) chorus depth on 0
 - B) variac at 0 F) master on 0 J) chorus rate on 0
 - C) trim pots halfway G) switches out K) speaker on
 - D) tones on 5 H) sustain on 0
- 4) Gradually adjust variac to 25 Vrms.
U20/P4= -1.5V (+or-) .5V. U20/P8= 3.2V (+or-) -.5V.
Regulated supplies = -.5 V (+or-) .5V./ 7.1V (+or-) -.5V.
- 5) Gradually adjust variac to 70Vrms while listening to the speaker and watching variac (AC amps) and scope. Output should go -8V then +10V, motor a little and settle at 0 between 50-60Vrms.
Regulated supplies = -14.3V (+or-) .5V/ 14.2V (+or-) .5V.
- 6) Adjust variac to 120Vrms and turn speaker off. Supply voltage (+or-) 46.5V (+or -).5V.
- 7) Set bias. Adjust R207 to get 5mV across R197, R208 (most pos. of the two), and R223, R224 (the most neg. of the two).
- 8) Set the following: master on 10.
- 9) Connect sine input (400Hz 50mVrms) -26 dB.
- 10) Compressor test.
 - A) Volume on 10.
 - B) Sustain on 0. U2/P6= 700mVp-p. U4/P7= 2.3Vp-p.
 - C) Engage compressor. U4/P7= 1.2Vp-p.
 - D) Gradually adjust sustain to 10. U4/P7 should increase to 1.7Vp-p.
 - E) Disengage compressor and continue.
- 11) Limiter adjustment. Adjust R174 to get a flat response at U21/P2 (compare fig.)
- 12) Set the following: volume on 0; 4 ohm load.
- 13) Slowly turn up volume just until limiter LED begins to light. At this point, output should be at full power =20Vrms.
- 14) Current limiter test. Change to a 2 ohm load. Output should be a clean sine wave without clipping and = 12Vrms (+or-) .5Vrms.
- 15) Turn master up and down to check if it works properly.
- 16) Set the following: volume and master on 10, no load.
- 17) Check direct out (J5) pins 2 and 3 = 550mVrms (1.5Vp-p).
- 18) Check balance out left (J8) and right (J9). Both should = 5.5Vrms in stereo and mono mode at pins 2 and 3.
- 19) Check send (J7). 1.7Vp-p, clean sine wave. Probe at R229.
- 20) Check headphone jack (J3). Tip = 3.4Vrms / Ring = 3.4Vrms or 13Vp-p clipped.
- 21) Test return.
 - A) Plug input into return (6). (400Hz 50mVrms sine) -26.0 dB. Output = 4Vrms.
 - B) Line out (J10)= 80mVrms.
- 22) Change to square signal at input (400Hz -26.0dB).
- 23) Test tones and filters and compare figures.
- 24) Chorus test.

Note: Trigger is on the channel, the scope probe is on, and connect to D.0 (J5) @ 1V/div. This will make it possible to make measurements without having trigger problems. An external trigger could also be used.


- A) Volume at 9 o'clock
 - B) Master at 10.
 - C) Tones on 5.
 - D) Engage chorus.
 - E) Rate 0/ Depth 0. Deviation = 1.3 sec. / Rate = 1.5 sec.
 - F) Rate 0/ Depth 10. Deviation = 5.0 sec.
 - G) Rate 10/ Depth 10. Rate = .25 sec.
 - H) Disengage chorus.
- 25) Balance out test. Sine input (400Hz 50mVrms) -26.0dB.
- A) Volume on 5.
 - B) Master on 10.
 - C) Tones on 5. Balance out left pins 2 and 3 and balance out right pins should look different. Left should swell up and down to a min. and max. value. Right should do the same, however oscillate right and left.
 - D) Engage chorus.
 - E) Stereo switch out.
 - F) Push in stereo switch (mono mode). Signal on left and right should look similar, swelling up and down.
 - G) Chorus off.
- 26) Check speaker cut-off switch.
- 27) Disconnect input.
- 28) Proceed with noise and tap test.
- A) Controls on 10, switch out = noise <60mVrms.
 - B) Controls on 10, contour in = noise <80mVrms.
 - C) Controls on 10, comp. in, sustain 0 = noise < 50mVrms.
 - D) Controls on 10, comp. in, sustain 10 = noise < 250mVrms.
 - E) Controls on 10, comp. in, sustain 10 = noise < 300mVrms.
 - F) Contour in, chorus in = noise < 40mVrms.
 - G) Contour in, master on 0 = noise < 2.5mVrms.

Noise should be clean without popping or cracking.

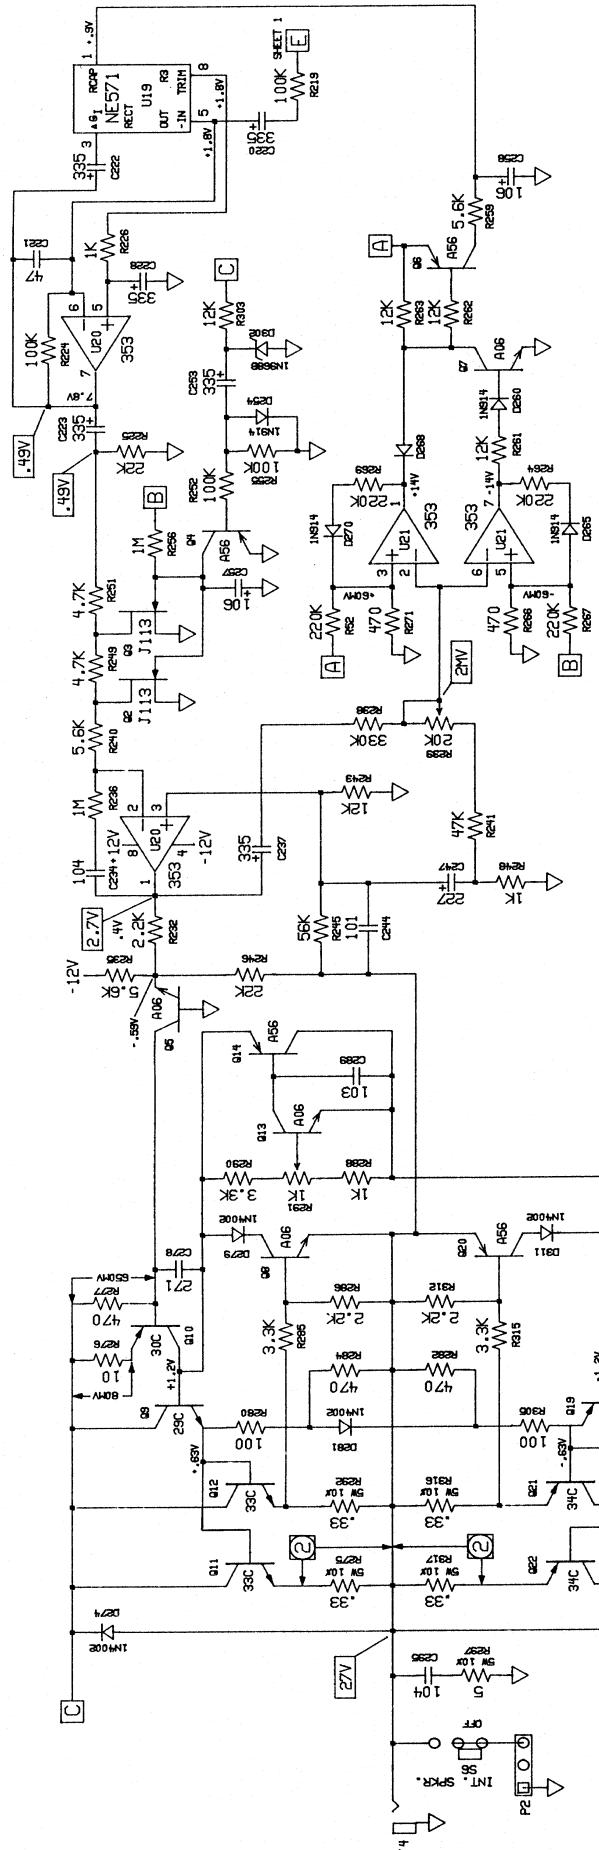


NOTES: UNLESS OTHERWISE SPECIFIED,

1. TEST CONDITIONS: 5MV 400HZ SINE.
VOLUME, TONES AND MASTER AT 10.
COMPRESSOR, CONTOUR AND CHORUS OFF.
NO LOAD AT OUTPUT.
2. ADJUST R291 FOR 5MV BIAS ACROSS R292 AND R316.

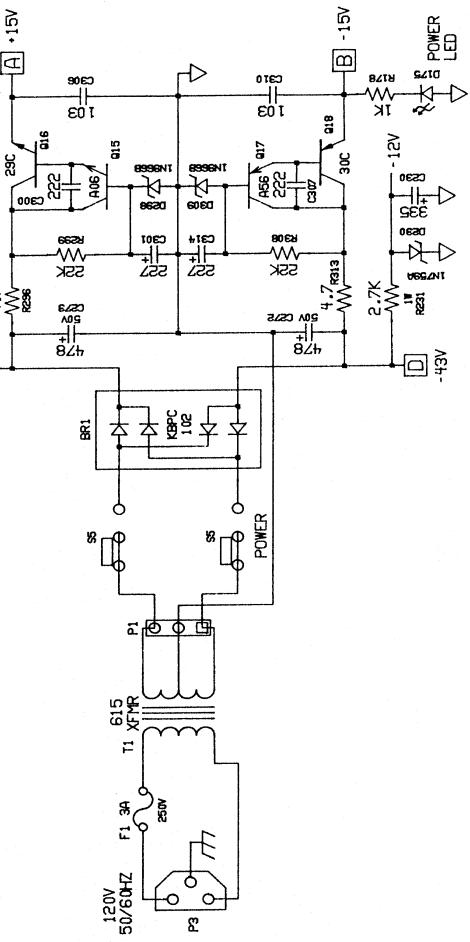


GALLIEN-KRUEGER	MODEL #:	DATE:
SCHEMATIC PG: 2 OF: 2	200MB/RCB	10-20-89
	POWER AMP./ POWER SUPPLY	
	PCB#-DATE:	60056F
	FROM SN:	
	TO SN:	

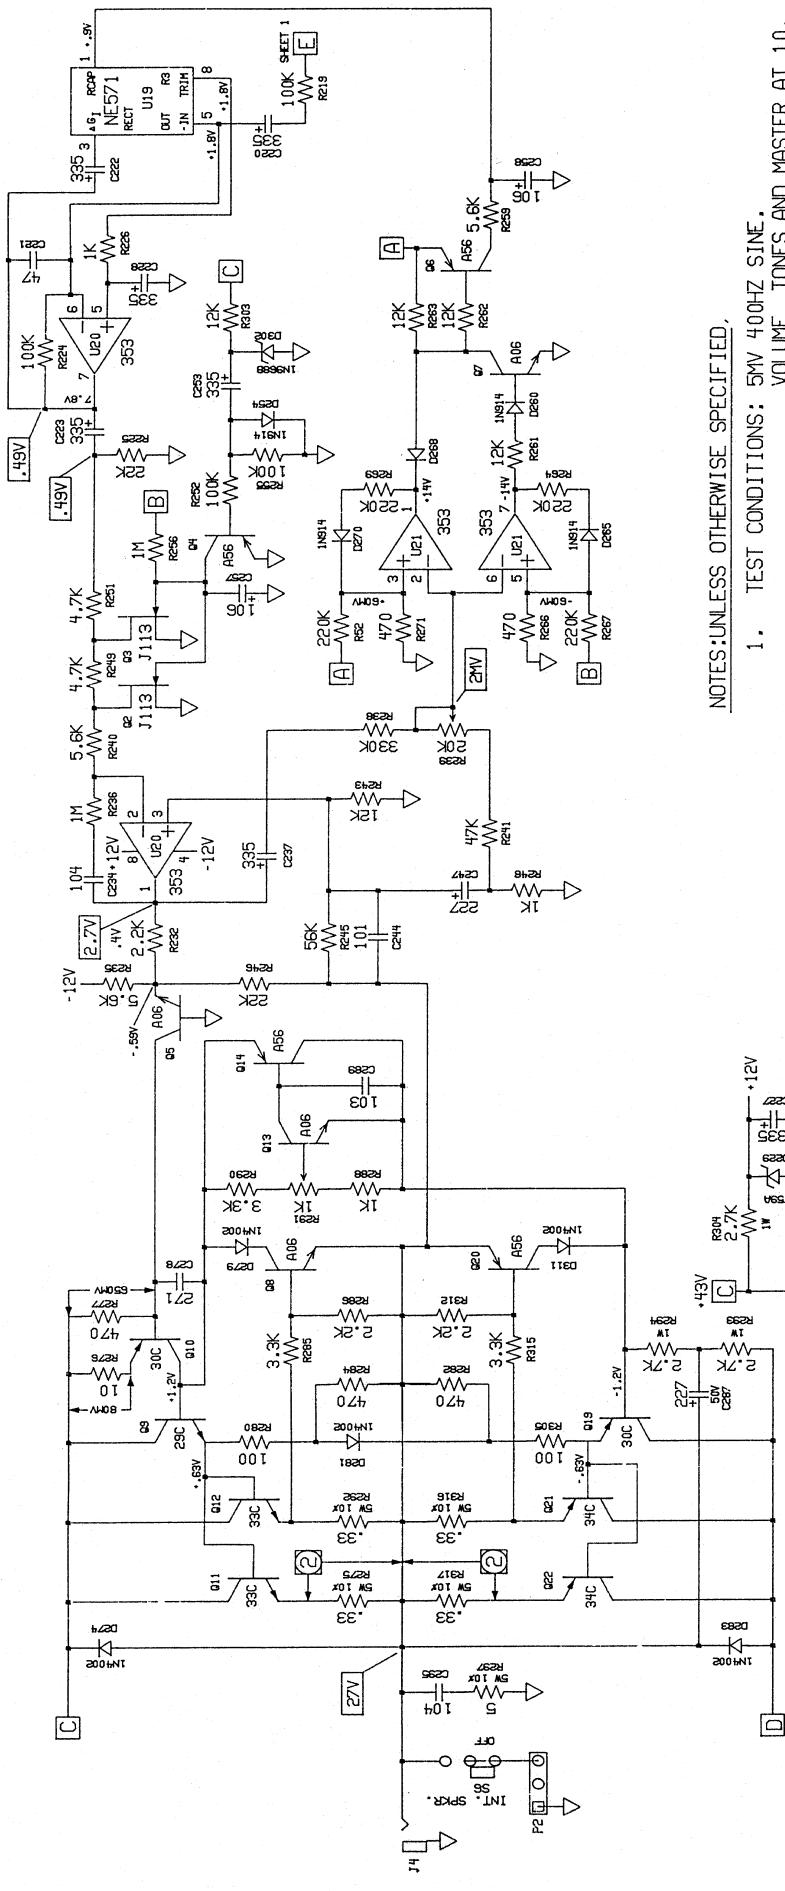


NOTES:UNLESS OTHERWISE SPECIFIED,


1. TEST CONDITIONS: 5MV 400HZ SINE.
 VOLUME, TONES AND MASTER AT 10.
 COMPRESSOR, CONTOUR AND CHORUS OFF.
 NO LOAD AT OUTPUT.

ADJUST R2291 FOR 5MV BIAS ACROSS R2292 AND R316.

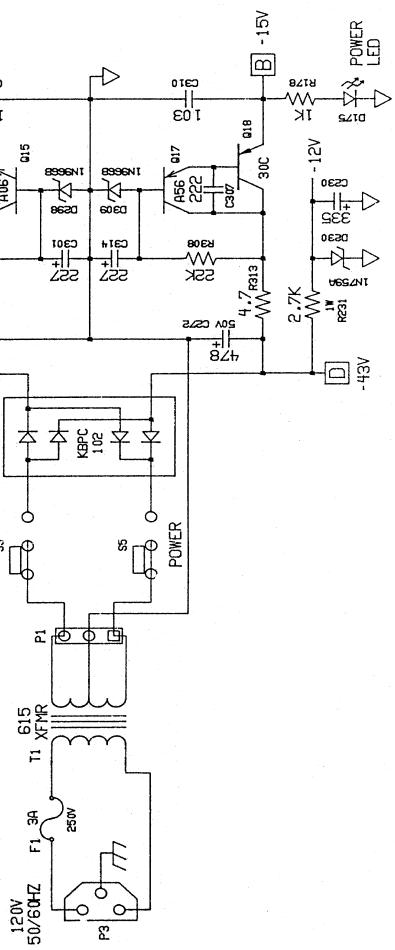



GALLIEN-KRUEGER	MODEL #: 200MB/RCB	DATE: 9-8-89	DESCRIPTION: POWER AMP./ POWER SUPPLY
SCHEMATIC PG: 2 OF: 2	DESIGNED BY: -	BOARD #: 600566	PCO#: DATE: - FROM SN: TO SN:

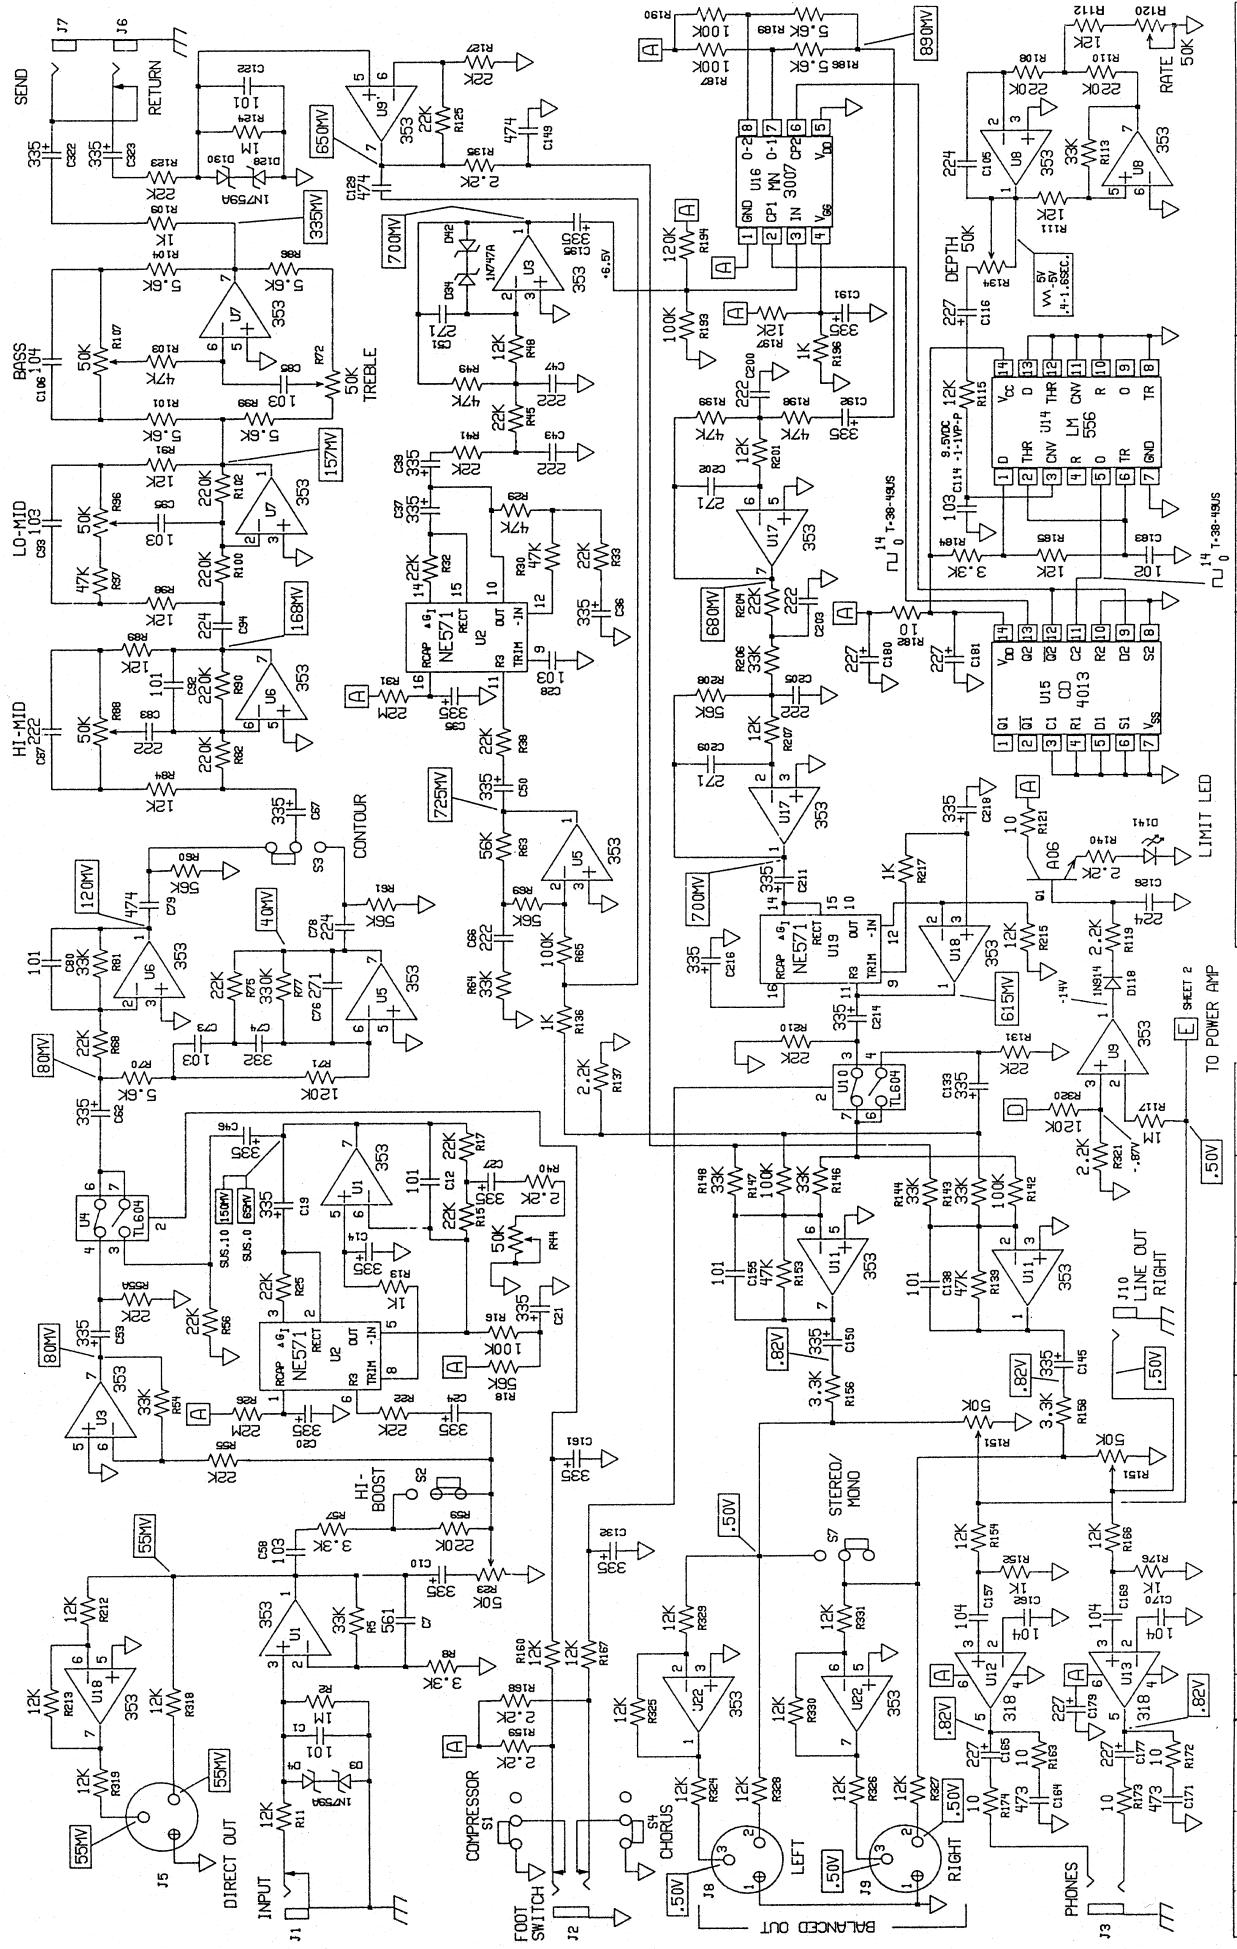

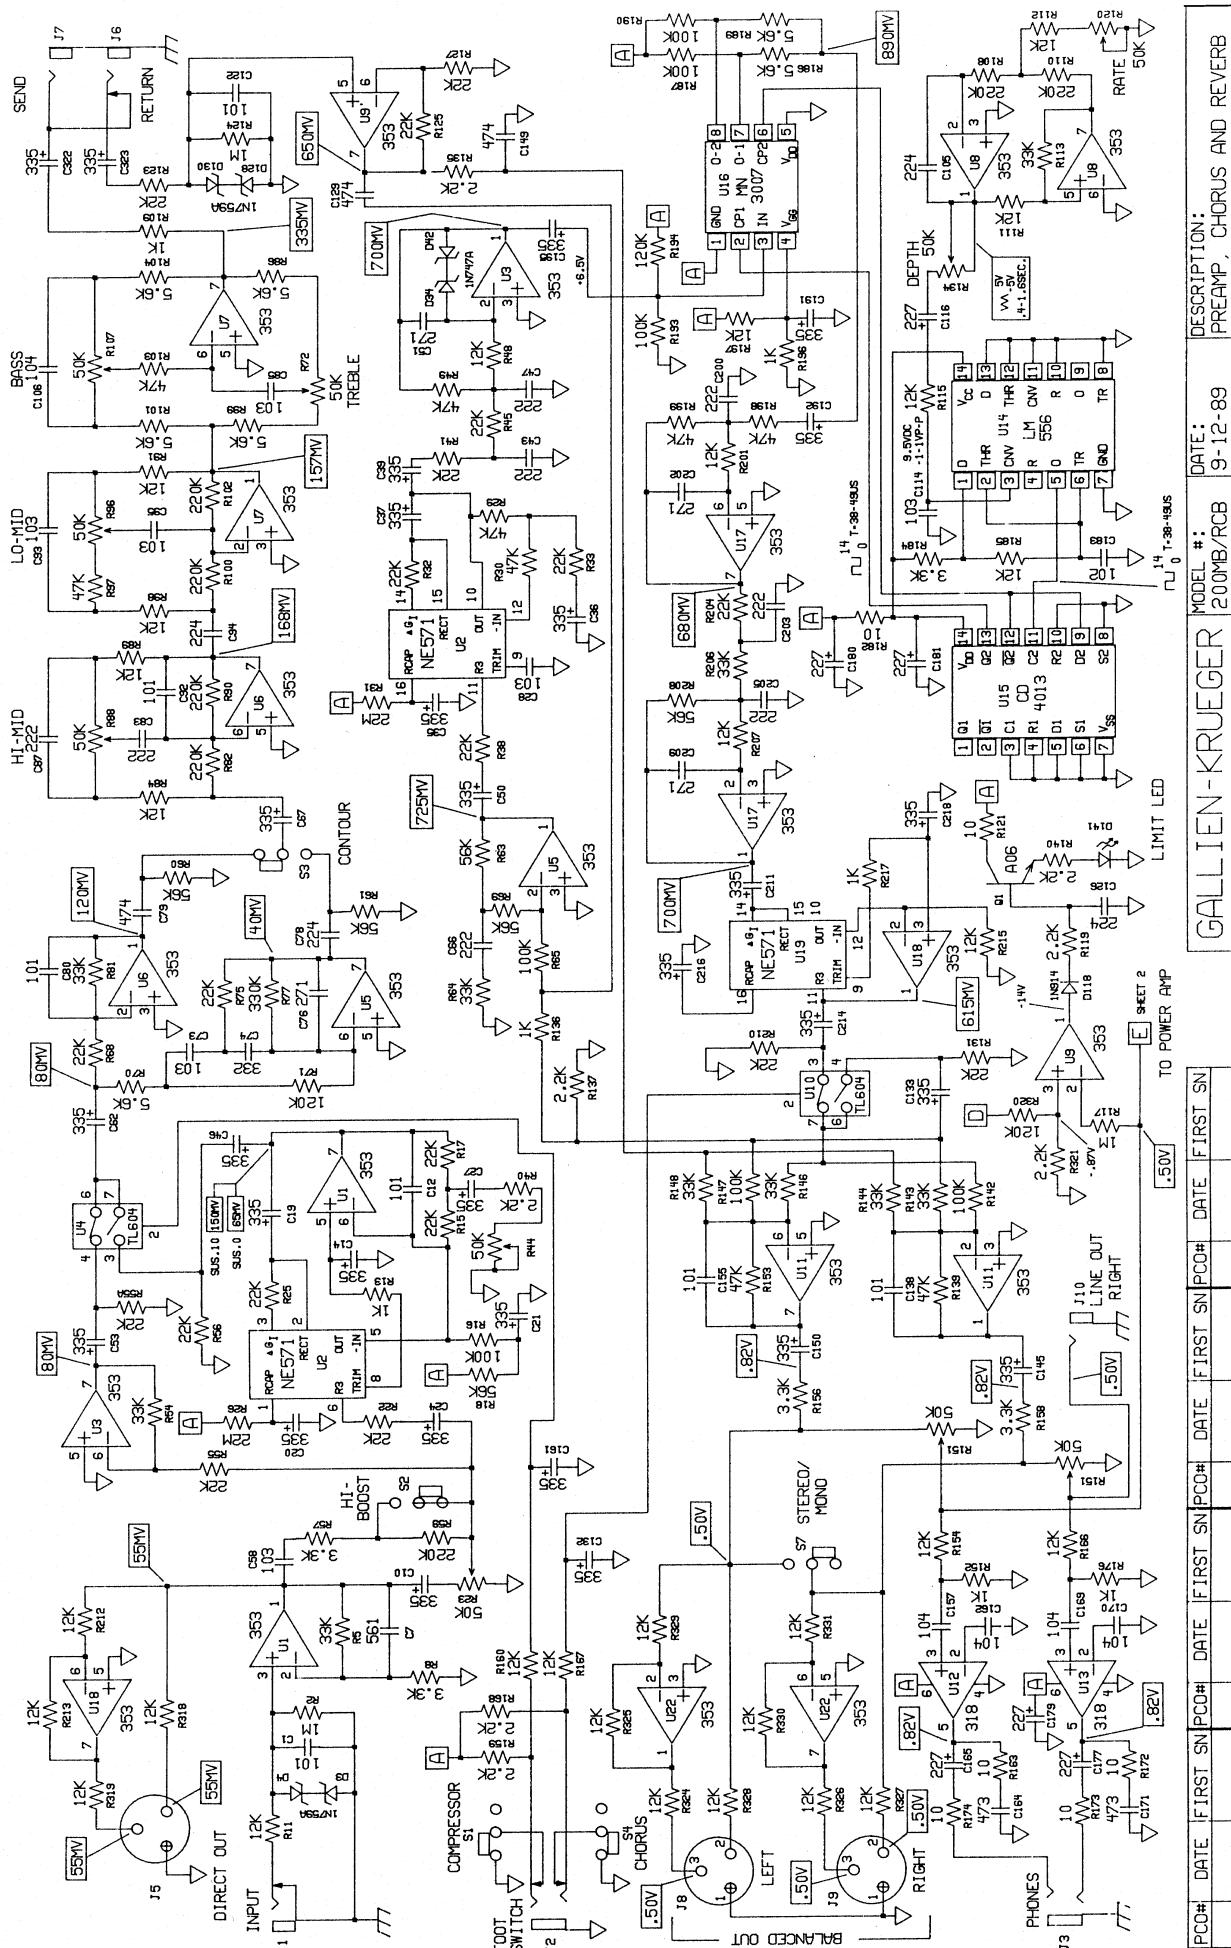


200MB CIRCUIT DIAGRAM- REF. DESIG.

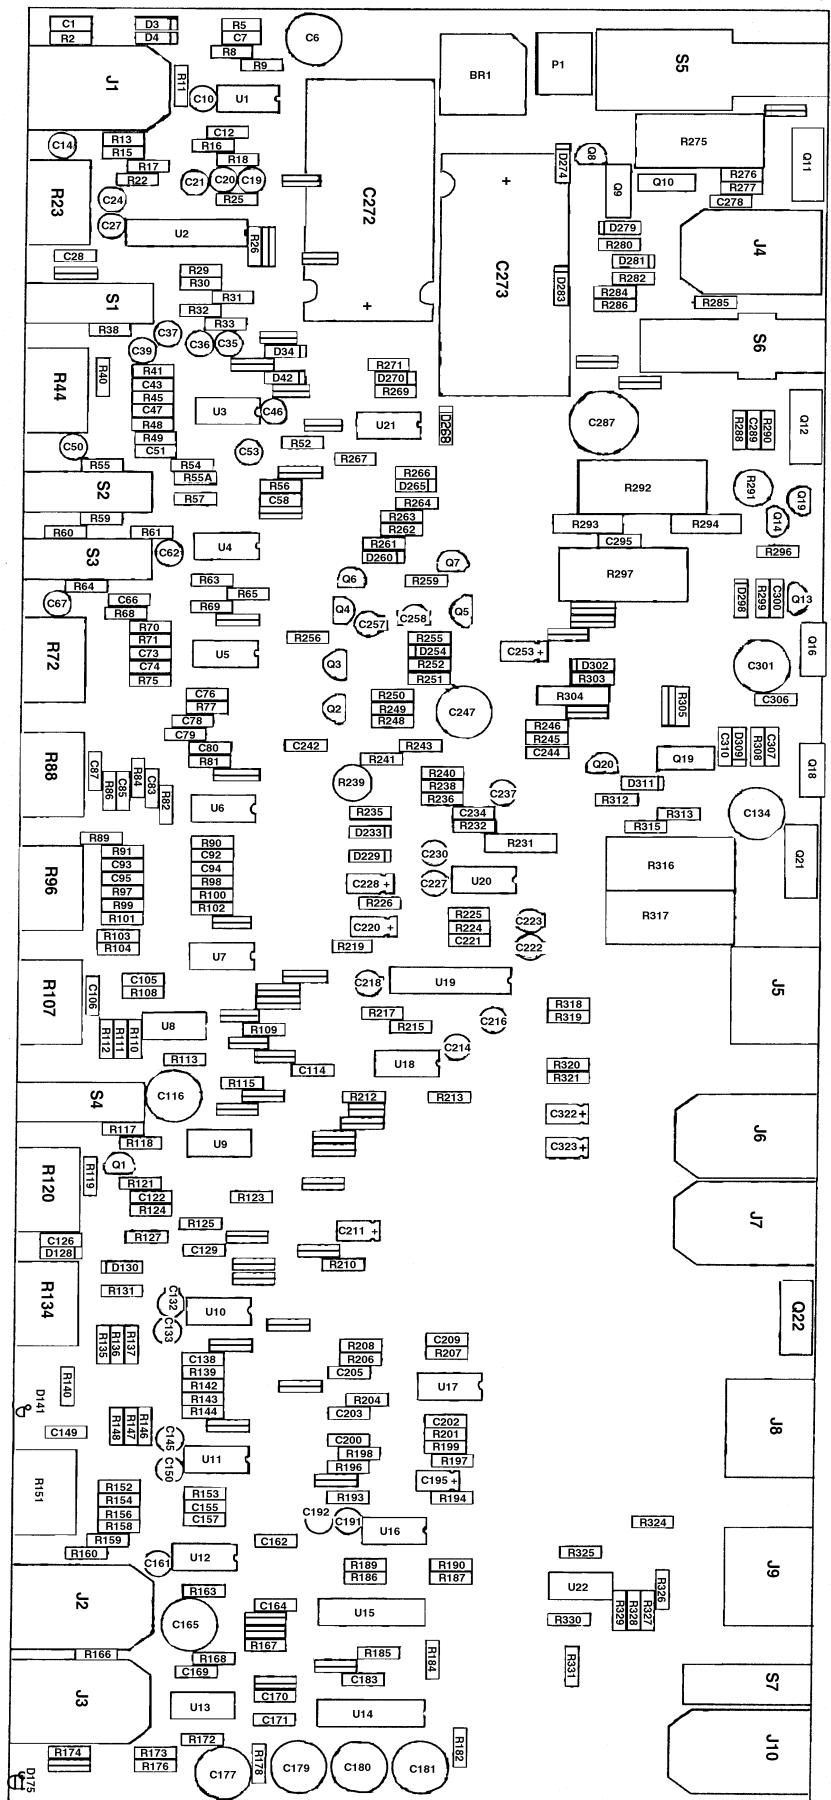

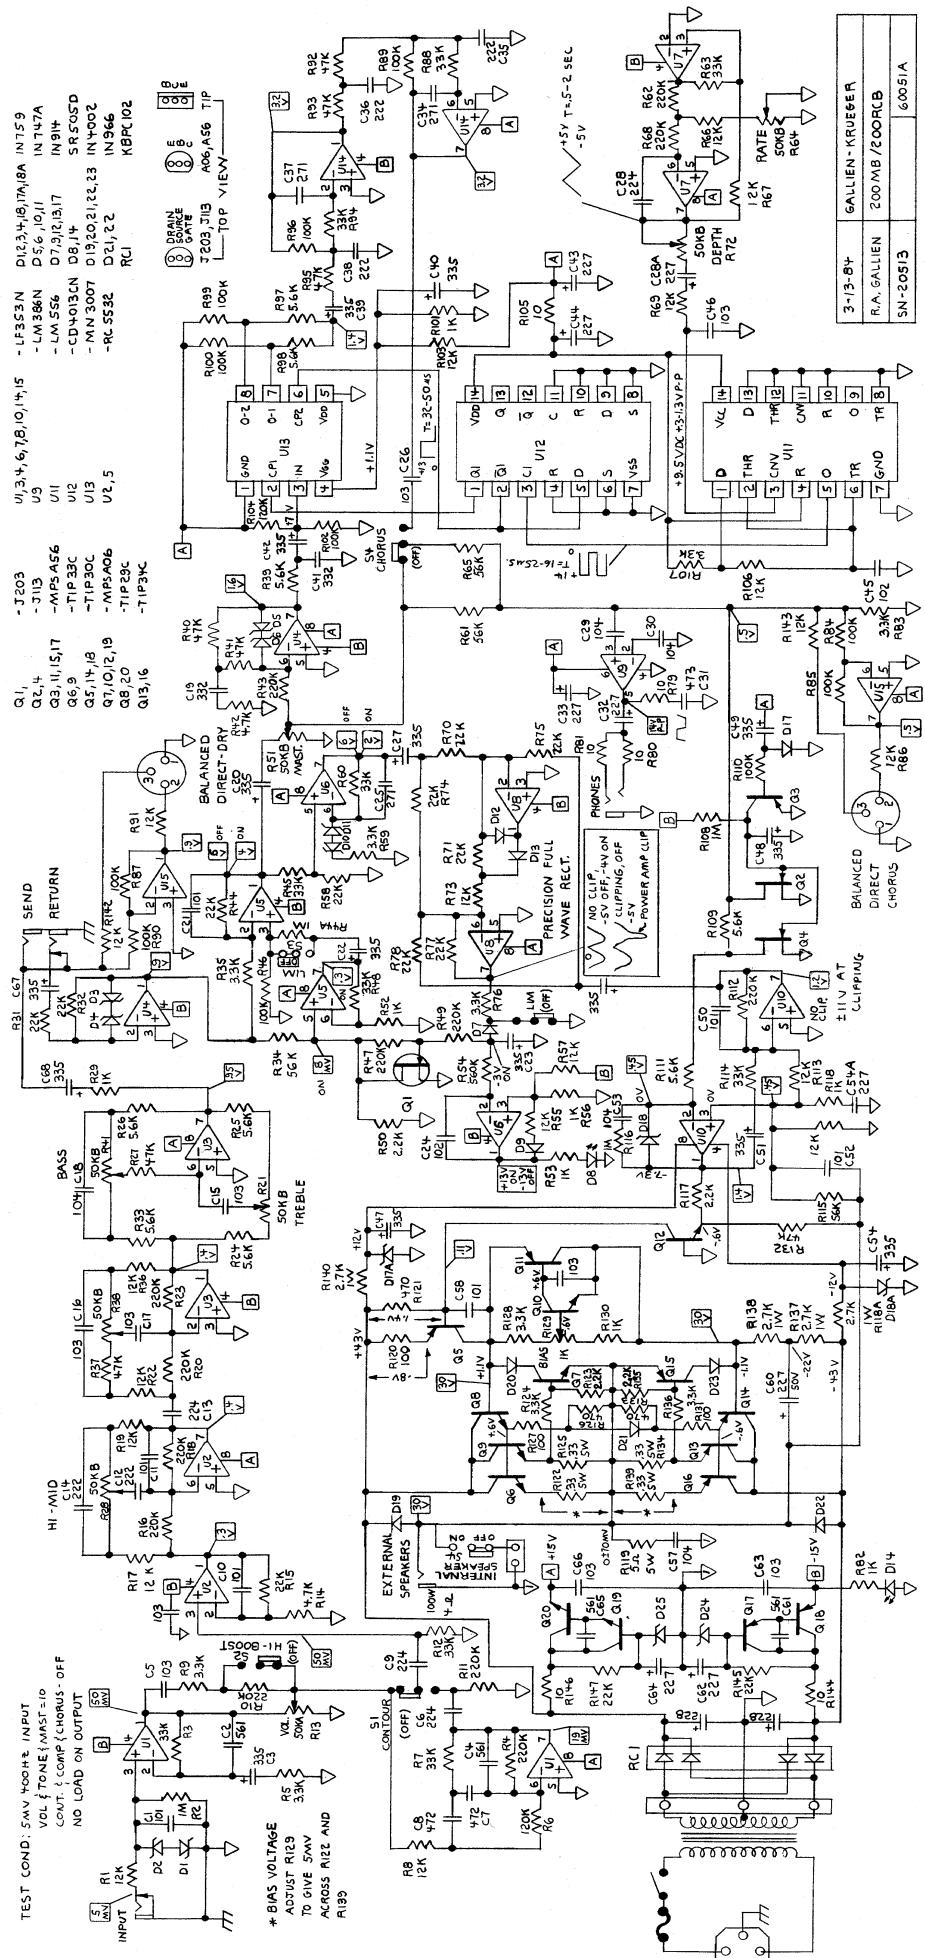

* ADJUST R207
FOR 5mV BIAS
ACROSS R197 AND
R224.

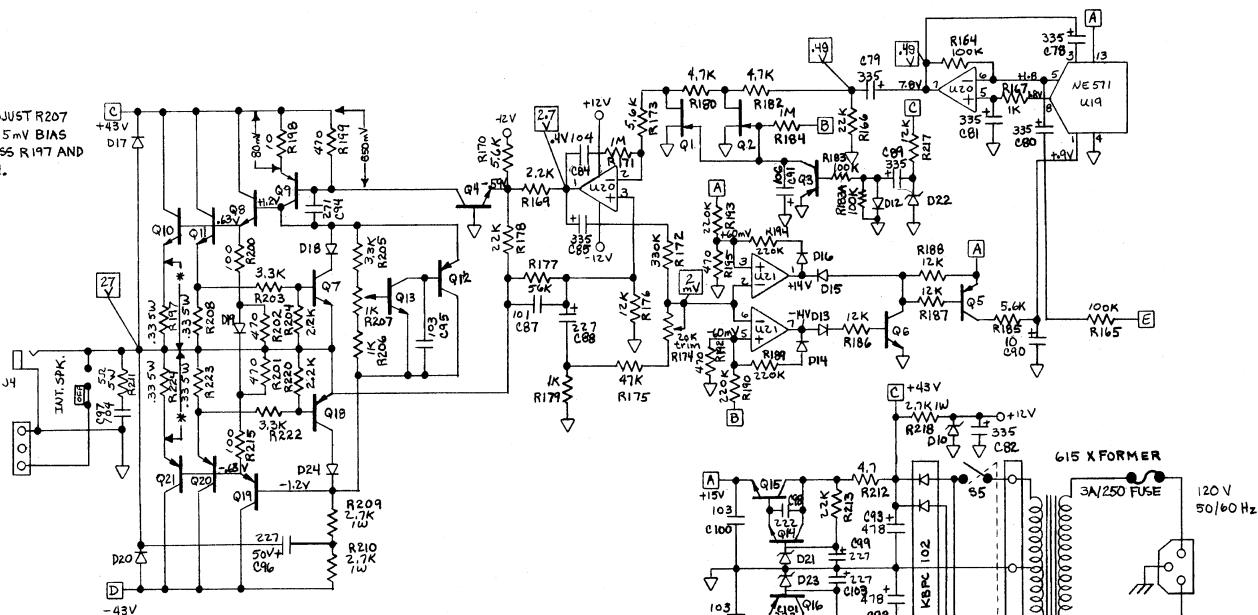

U 16	- MN3007	D 5,12,13,14,15,16	- IN914
U 14	- LM556CN	D 22	- IN968B
U 4,10	- TL60VCP	D 17,18,19,20,24	- IN4002
U 1,3,5,6,7,8,9,11,18,20,21,22-LF553N		D 3,4	- IN747A
U 15	- CD4013BCN	D 1,2,6,7,10,11	- IN759A
U 12,13	- LM386N	D 21,23	- IN966B
U 2,14	- NE571	D 8,9	- LED T-1
U 1,2	- J113	J 1,6	- RN112A PC
Q 0,4,6,7,13,14	- MPSA06	J 2	- RN114BPC
Q 3,5,12,16,18	- MPSA56	J 4,7,10	- RN111PC
Q 845	- TIP29C	J 3	- RN 112 BPC
Q 9,17,19	- TIP30C	J 58,9	- DO X7010ZP.C
Q 10,11	- TIP33C		
Q 20,21	- TIP34C		

11-4-85	GALLIEN-KRUEGER
M. JOHNS	200 MB
	60056B

TEST CONDITIONS: 5V 400Hz SINE
VOL/TONES & MAST. ID,
COMP, CONT, CHORUS
OFF, NO LOAD AT OUTPUT

BALANCED OUT/LEFT J8


BALANCED OUT/RIGHT J9

PHONES J3

LINE OUT RIGHT J10

TO POWER AMP


SPECIFICATIONS:
GALLIEN-KRUEGER
M. JOHNS 200MB/200RCB
44235-49284 6005GB

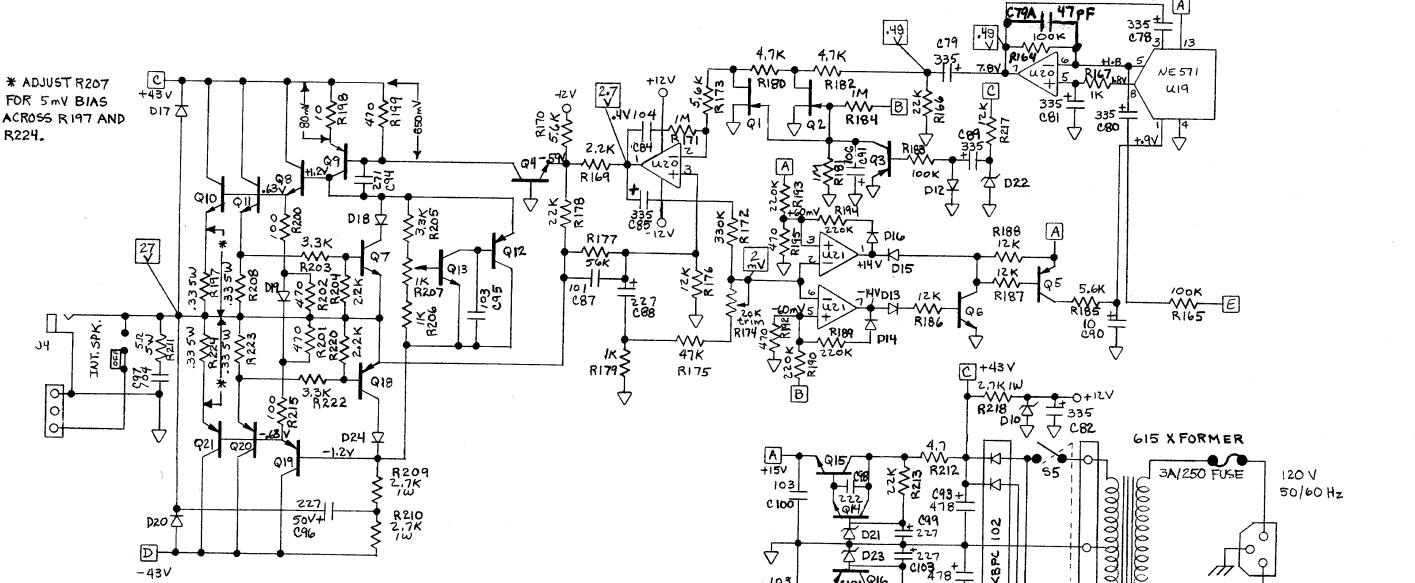


U16	-MN3007
U14	-LM556CN
U4,10	-TL604CP
U1,3,5,6,7,8,9,11,18,20,21,22-LF355N	D22 D17,18,19,20,24
U15	-CD4013BCN
U12,13	-LM386N
U2,14	-NE571
Q1,2	-J113
Q1,4,6,7,13,14	-MPSA00
Q3,5,12,16,18	-MPSA56
Q8,15	-TIP29C
Q9,17,19	-TIP30C
Q10,11	-TIP32C
Q20,21	-TIP34C
	-IN914
	-IN468B
	-IN4002
	-IN747A
	-IN759A
	-IN966B
	-LED T-1
	-RN112ARC
	-RN114BPC
	-RN111PC
	-RN112BPC
	-DO X70602PC

615 X FORMER
120 V 50/60 Hz
3A/250 FUSE

11-4-85	GALLIEN-KRUEGER
M. JOHNS	200MB
	60056B

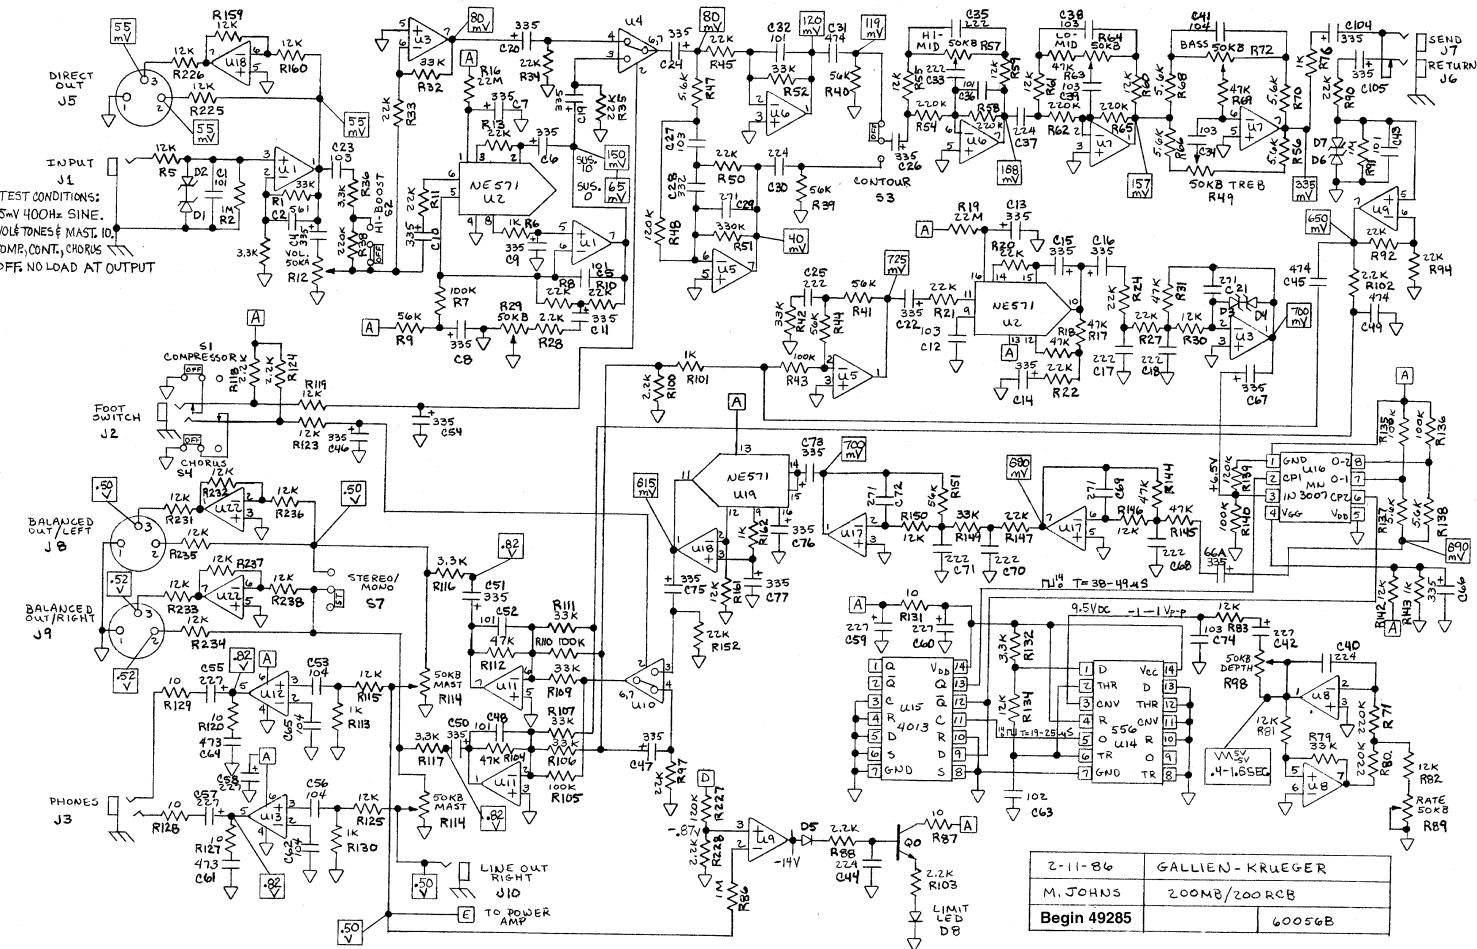

2-11-86	GALLIEN-KRUEGER
M. JOHNS	200MB/200RCB
Begin 49285	60056B

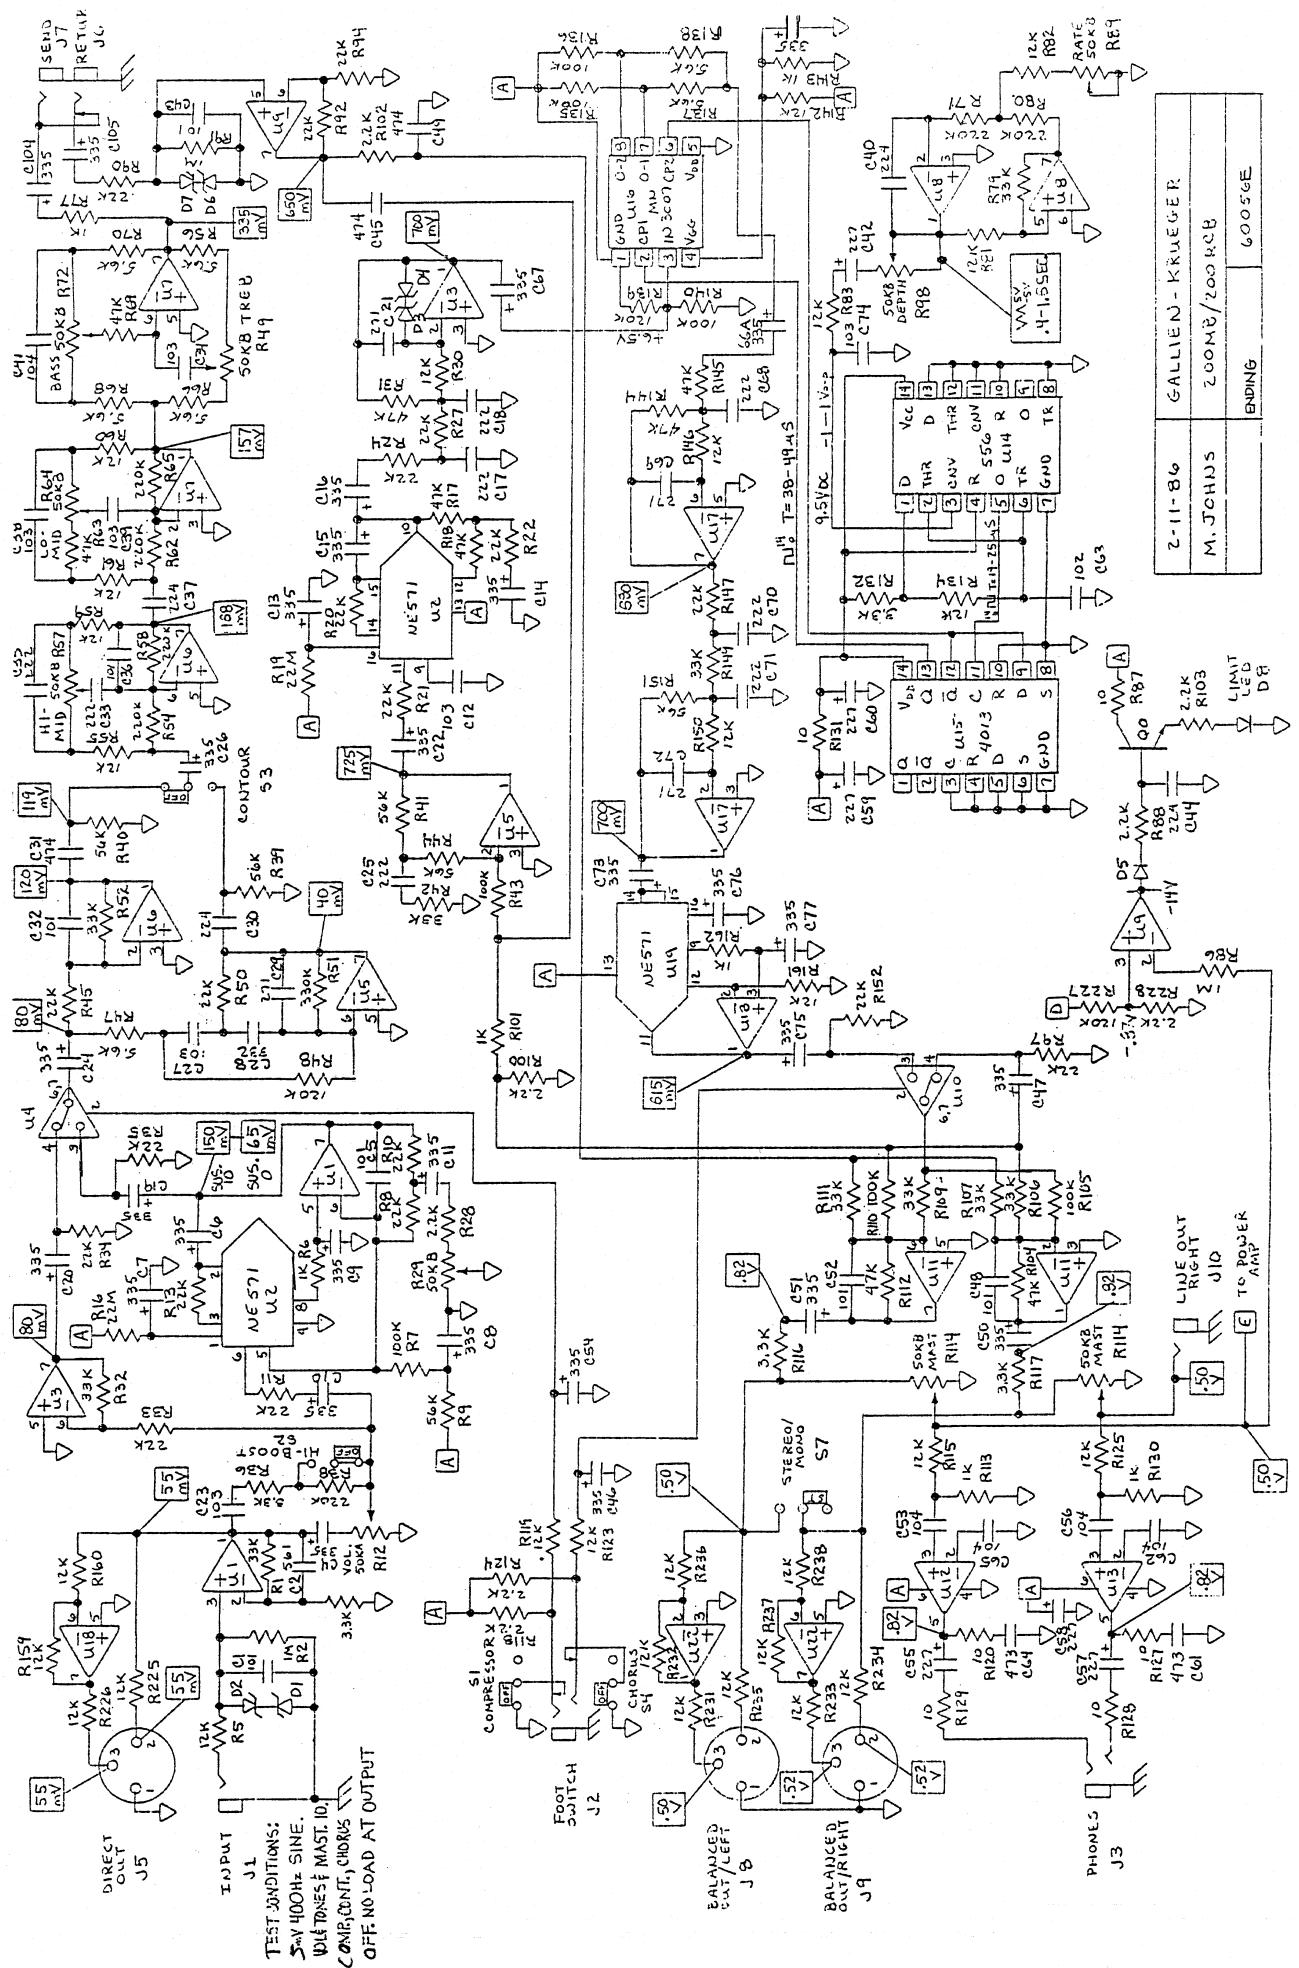

2-11-86	GALLIEN-KRUEGER
M. JCHHS	ZOOMER/2004B
ENDING 600SE	

RE9


R82

50kΩ

R87

LED

DR

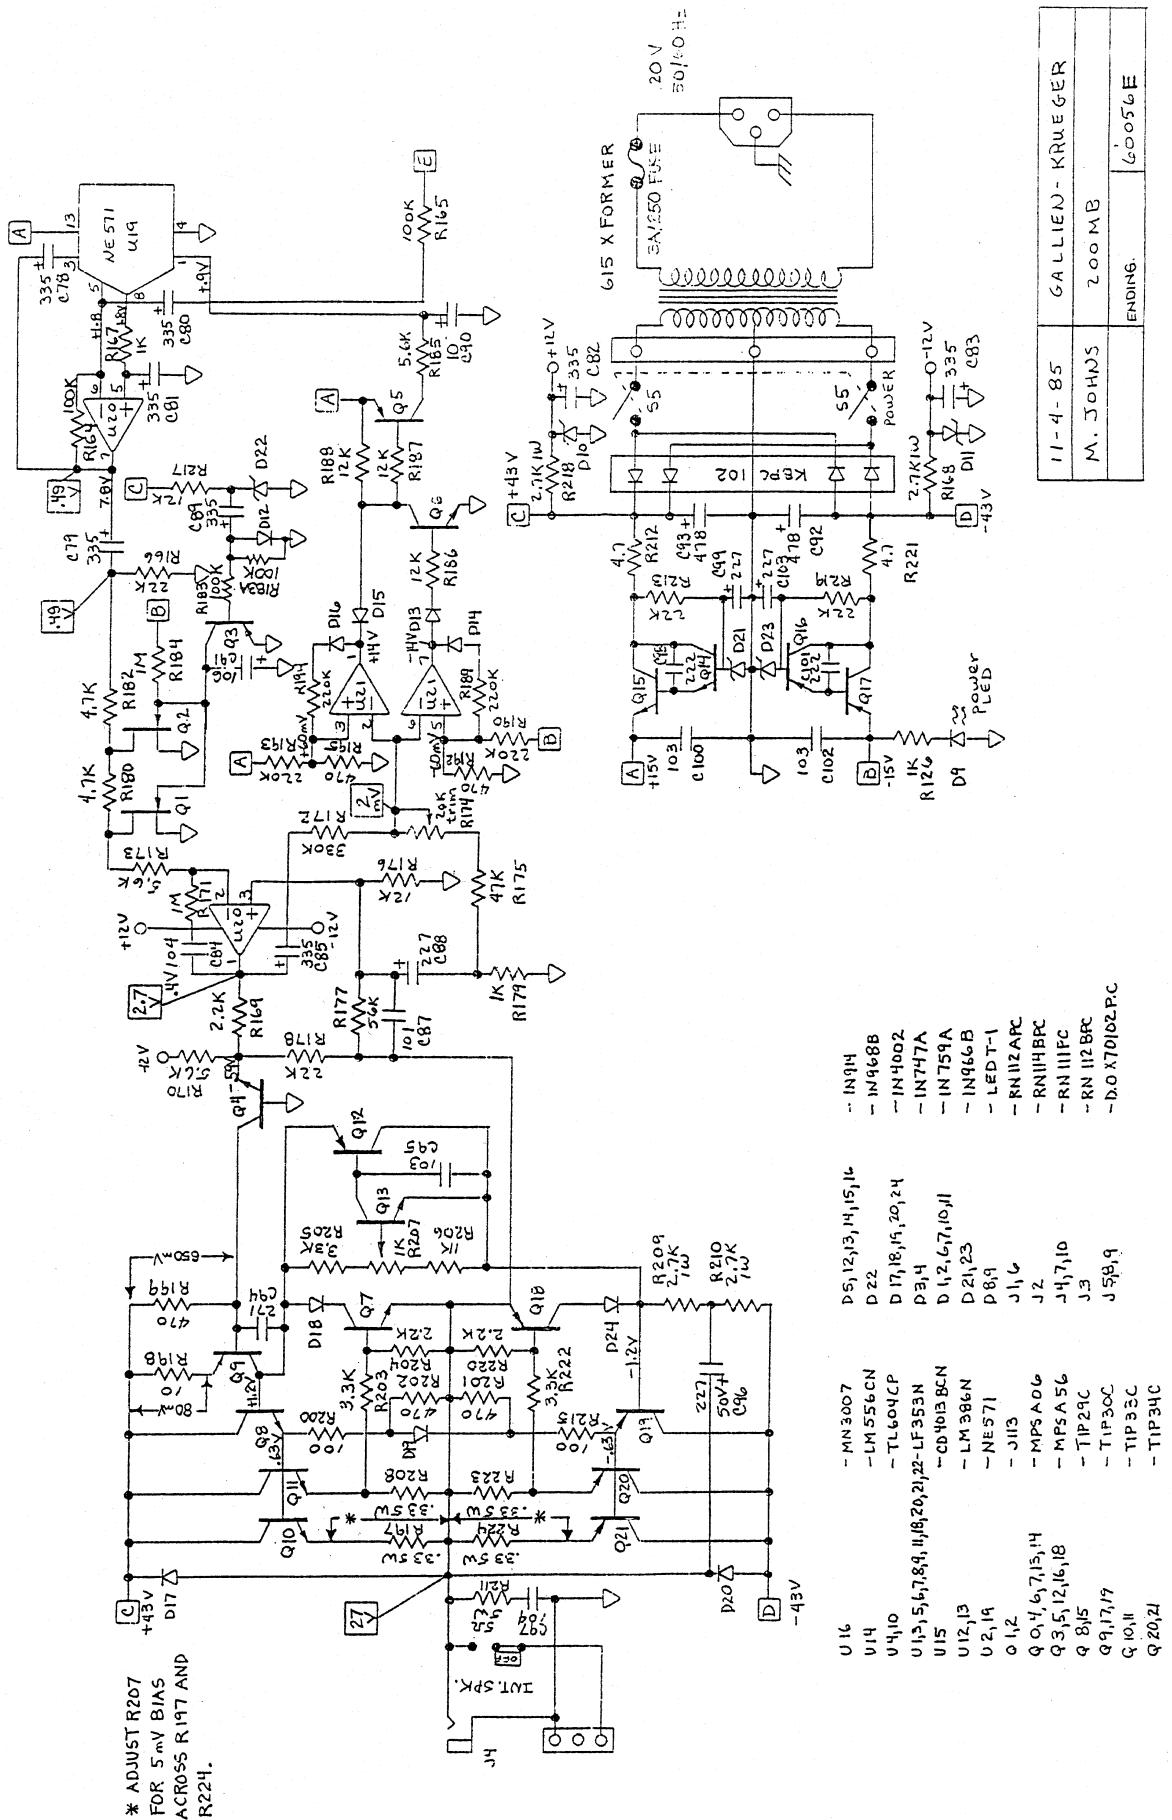

200MB INDENTED BILL OF MATERIALS**NOTE:**

Level 1 refers to main assembly parts.

Level 2 refers to board level components.

Main assembly numbers are in bold face, while commonly needed parts are italicized.

LVL	PART#	DESCRIPTION	QTY	REF. DESIG.
1	010-0012-0	MPSA06 NPN 80V 500MA TO-92	1	
1	011-0023-0	TIP29C NPN 100V 1A TO-220 FP	1	
1	011-1035-0	TIP30C PNP 100V 1A TO-220	1	
1	012-0084-0	TIP 33CFP NPN 100V 10A TO218	2	
1	012-1085-0	TIP 34CFP,PNP,100V,10A,TO-218,PECOR	2	
1	025-0116-0	RED LED,1.5MCD,120 DEG,T-1	2	
1	080-0061-0	<i>TRANSFORMER, 100W, 120V</i>	1	
1	082-0039-0	SPEAKER,12",80W,Z=8,PYLE FOAM EDGE	1	
1	091-0003-0	<i>FUSE, 3A, 125V, 1/4X1 1/4, SLB</i>	1	
2	799-TEST-0	TRY OUT	0	
1	092-0009-0	XLR,MALE,PC TERM TRIANGLE	3	
1	093-0014-0	<i>RECEPTICAL AC,Q-TERM</i>	1	
1	093-0032-0	HOUSING,3X.156,FEMALE 22GA,LOCK	2	
1	094-0013-0	<i>HOLDER,FUSE,1/4 X 1 1/4,Q-TERM</i>	1	
1	094-0019-0	SOLDER LUG,#6	1	
1	095-0005-0	<i>POWER CORD,117V PLUG,DETACH</i>	1	
1	100-0012-0	GROMIT,3/16 X.100	1	
1	100-0016-0	LOGO,3 INCH,CAST	1	
1	100-0027-0	BUTTON,ROUND BLACK CAP - PUSH SWITCH	1	
1	100-0030-0	BUTTON,RECT BLACK CAP - PUSH SWITCH	1	
1	100-0037-0	HEAT CLIP,TO-98	1	
1	100-0042-0	<i>HANDLE,RUBBER,6.5"</i>	1	
1	100-0044-0	BUMPER,1/2",SQUARE	2	
1	100-0057-0	<i>KNOB BODY 18 SPLINE SHAFT</i>	9	
1	100-0062-0	<i>KNOB CAP GRAY,FOR 100-0057</i>	9	
1	100-0065-0	<i>CAP FOR 6.5" HANDLE "BLACK"</i>	2	
1	100-0076-0	FOOT,RUBBER,ROUND,5/8DIA. X 5/8"	4	
1	111-0061-0	BOLT 4-40 3/8 PHP CAD	4	
1	111-0081-0	BOLT 4-40 1/2 PHP CAD	6	
1	111-3041-0	SCREW 4AB 1/4 PHP CAD	6	

LVL	PART#	DESCRIPTION	QTY	REF. DESIG.
1	111-6001-0	NUT 4-40 KEP SMALL	4	
1	111-6011-0	NUT 4-40 HEX SMALL CAD	6	
1	111-7011-0	WASHER #4 SPLIT	6	
1	112-0051-0	BOLT 6-32 5/16 PHP CAD	4	
1	112-1050-0	BOLT 6-32 5/16 FHP 82^ B.O.	11	
1	112-1120-0	BOLT 6-32 3/4 FHP 82^ B.O.	8	
1	112-4080-0	SCREW 6AB 1/2 FHP 82^ B.O.	38	
1	112-4081-0	SCREW 6AB 1/2 FHP 82^ CAD	1	
1	112-4140-0	SCREW 6AB 7/8 FHP 82^ B.O.	1	
1	112-6001-0	NUT 6-32 KEP LARG SIZE CAD	8	
1	112-7001-0	WASHER #6 FLAT CAD	12	
1	113-0080-0	BOLT 8-32 1/2 PHP B.O.	4	
1	113-6011-0	NUT 8-32 KEP CAD	4	
1	114-0080-0	BOLT 10-32 1/2 PHP B.O.	2	
1	115-7005-0	WASHER 3/8 FIBRE FLAT	1	
1	115-7021-0	WASHER 3/8 INTERNAL CAD	12	
1	115-7031-0	WASHER SMALL 3/8 LOCK CAD	3	
1	132-0349-A	200MK/MV TOP COVER	1	
2	120-0005-0	ALUM .100	98	
1	132-0350-B	200MB-MK RIGHT SIDE	1	
2	114-6046-0	NUT 10-32 CAPTIVE	1	
2	120-0005-0	ALUM .100	164	
1	132-0351-B	200MB-MK LEFT SIDE	1	
2	114-6046-0	NUT 10-32 CAPTIVE	1	
2	120-0005-0	ALUM .100	164	
1	132-0352-B	200MB BAFFLE	1	
2	120-0005-0	ALUM .100	384	
1	132-0356-B	200MK GRILL	1	
2	120-0003-0	STEEL,16GA,PERF,3'X10'X.060	0	
2	120-0011-0	STEEL,18 GAUGE JET COAT,.048	272	
1	132-0384-B	200MB FRONT PANEL SERIES 2	1	
2	112-6016-0	NUT 6-32 CAPTIVE	5	
2	120-0007-0	ALUM .063	54	

LVL	PART#	DESCRIPTION	QTY	REF. DESIG.
1	132-0385-B	200MB REAR PANEL SERIES 2	1	
2	112-6016-0	NUT 6-32 CAPTIVE	10	
2	120-0005-0	ALUM .100	45	
1	132-0386-D	200MB BACK SERIES 2	1	
2	120-0005-0	ALUM .100	406	
1	160-0008-0	MANUAL,MB-RCB SERIES II	1	
1	202-0014-0	200MB WIRE KIT	1	
1	206-0056-G	200MB-RCB II AMP	1	
2	001-0006-0	MN3007 1024 STAGE BBD	1	
2	001-1030-0	LF353N DUAL JFET OP AMP	13	U1,3,5,6,7,8,9,11,17,18,20,21,22
2	001-1038-0	LM386 LOW VOLTAGE POWER AMP	2	U12,13
2	001-2009-0	LM556CN DUAL TIMER	1	U14
2	001-3028-0	TL604 DUAL COMP ANALOG SWITCH	2	U4,10
2	001-4043-0	NE571 DUAL COMPANDOR	2	
2	002-0034-0	CD4013 DUAL D FLIP-FLOP	1	U15
2	010-0012-0	MPSA06 NPN 80V 500MA TO-92	5	Q0,4,6,7,14
2	010-1013-0	MPSA56 PNP 80V 500MA TO-92	5	Q3,5,12,16,18
2	010-2010-0	J113 N-JFET 35V 2MA TO-92	2	Q1,2
2	011-0023-0	TIP29C NPN 100V 1A TO-220 FP	1	Q8
2	011-1035-0	TIP30C PNP 100V 1A TO-220	2	Q9,18
2	020-0036-0	1N747A,ZENER,3.6V,5%,400MW,DO-35	2	D3,4
2	020-0120-0	1N759A,ZENER,12V,5%,400MW,DO-35	6	D1,2,6,7,10,11
2	020-0160-0	1N966B,ZENER,16V,5%,400MW,DO-35	2	D21,23
2	020-1103-0	1N914 ,RECT-FAST,200MA,100V,4NS,DO-35	6	D5,12,13,14,15,16
2	020-2105-0	1N4002,RECT,1A,150V,DO-41	5	D17,18,19,20,24
2	023-0109-0	KBPC-102 BRIDGE RECT 3A,200V,C219K	1	BRIDGE RECTIFIER
2	030-1103-0	CAP,CERAMIC AXIAL,103,30%,25V	11	C12,23,27,34,38,39,74,86,95,100,102
2	030-2101-0	CAP,CERAMIC AXIAL,101,5%,50V	8	C1,5,32,36,43,48,52,87
2	030-2102-0	CAP,CERAMIC AXIAL,102,10%,50V	1	C63
2	030-2104-0	CAP,CERAMIC AXIAL,104,10%,50V,XR7,.3"	7	
2	030-2222-0	CAP,CERAMIC AXIAL,222,10%,50V	10	C17,18,25,33,35,68,70,71,98,101
2	030-2224-0	CAP,CERAMIC AXIAL,224,20%,50V,XR7	4	C30,37,40,44
2	030-2271-0	CAP,CERAMIC AXIAL,271,10%,50V	5	C21,29,69,72,94

LVL	PART#	DESCRIPTION	QTY	REF. DESIG.
2	030-2332-0	CAP,CERAMIC AXIAL,332,10%,50V	1	C28
2	030-2470-0	CAP,CERAMIC AXIAL,47,5%,50V	1	C79A
2	030-2473-0	CAP,CERAMIC AXIAL XR7,473,10%,50V	2	C61,64
2	030-2474-0	CAP,CERAMIC AXIAL Z5U,474,20%,50V	3	C31,45,49
2	030-2561-0	CAP,CERAMIC AXIAL,561,10%,50V	1	C2
2	031-1227-0	CAP,ELECTROLYTIC RADIAL,227,-10%+50%,25V	10	C3,42,55,57,58,59,60,88,99,103
2	031-2106-0	CAP,ELECTROLYTIC RADIAL,106,-10%+50%,50V	2	C90,91
2	031-2227-0	CAP,ELECTROLYTIC RADIAL,227,-10%+50%,50V	1	C96
2	031-2335-0	CAP,ELECTROLYTIC RADIAL,335,20%,50V	32	C4,6,7,8,9,10,11,13,14,15,16,19,20,22,24,26,46,47, 50,51,54,66,67,73,75,76,77,78,79,80,81,82,83,85, 89,91,104,105,66A
2	038-2335-0	CAP,ELECTROLITIC AXIAL TR 335,20% 25V	7	
2	038-2478-0	CAP,ELECTROLYTIC AXIAL,478,20%,50V	2	C92,93
2	051-0100-0	RES,CARBON FILM,1 OHM,1/4W,5%	40	R4,14,15,23,25,26,37,46,53,67,73,74,75,77,78,84, 85,93,95,96,99,108,121,122,133,141,148,153,154, 155,156,157,158,163,191,196,214,216,229,230
2	051-0101-0	RES,CARBON FILM,10 OHM,1/4W,5%	7	R87,120,127,128,129,131,198
2	051-0470-0	RES,CARBON FILM, 4.7 OHM,1/4W,5%	2	R212,221
2	051-1001-0	RES,CARBON FILM,100 OHM,1/4W,5%	2	R200,215
2	051-1002-0	RES,CARBON FILM,1K OHM,1/4W,5%	11	R6,76,101,113,126,130,143,162,167,179,206
2	051-1004-0	RES,CARBON FILM,100K OHM,1/4W,5%	11	R7,43,105,110,135,136,140,164,165,183,183A
2	051-1005-0	RES,CARBON FILM,1M OHM,1/4W,5%	5	R2,86,91,171,184
2	051-1203-0	RES,CARBON FILM,12K OHM,1/4W,5%	23	R5,30,55,59,60,61,81,82,83,115,119,123,125,134, 142,146,150,161
2	051-1204-0	RES,CARBON FILM,120K OHM,1/4W,5%	3	R48,139,227
2	051-2202-0	RES,CARBON FILM,2.2K OHM,1/4W,5%	11	R28,88,100,102,103,118,124,169,204,220,228
2	051-2203-0	RES,CARBON FILM,22K OHM,1/4W,5%	24	R8,10,11,13,20,21,22,24,27,33,34,35,45,50, 90,92,94,97,147,152,166,178,213,219
2	051-2204-0	RES,CARBON FILM,220K OHM,1/4W,5%	11	R38,54,58,62,65,71,80,189,190,193,194
2	051-2206-0	RES,CARBON FILM,22M OHM,1/4W,5%	2	R16,19
0.2	051-3302-0	RES,CARBON FILM,3.3K OHM,1/4W,5%	8	R3,36,116,117,132,203,205,222
0.2	051-3303-0	RES,CARBON FILM,33K OHM,1/4W,5%	10	R1,32,42,52,79,106,107,109,111,149
2	051-3304-0	RES,CARBON FILM,330K OHM,1/4W,5%	2	R51,172
2	051-4701-0	RES,CARBON FILM,470 OHM,1/4W,5%	5	R192,195,199,201,202
2	051-4702-0	RES,CARBON FILM,4.7K OHM,1/4W,5%	2	R180,182
2	051-4703-0	RES,CARBON FILM,47K OHM,1/4W,5%	10	R17,18,31,63,69,104,112,144,145,175

LVL PART#	DESCRIPTION	QTY	REF. DESIG.
2 051-5602-0	RES,CARBON FILM,5.6K OHM,1/4W,5%	10	R47,56,66,68,70,137,138,170,173,185
2 051-5603-0	RES,CARBON FILM,56K OHM,1/4W,5%	7	R9,39,40,41,44,151,177
2 052-0000-0	RES,METAL WIRE, 0 OHM,1/4W,1%	5	
2 052-1213-0	RES,METAL FILM,12.1K OHM,1/4W,1%	12	R159,160,225,226,231,232,233,234, 235,236,237,238
2 054-2702-0	RES,CARBON FILM,2.7K OHM,1W,5%	4	R168,209,210,218
2 056-.330-0	RES,CERAMIC WW,.33 OHM,5W,10%	4	R197,208,223,224
2 056-0500-0	RES,CERAMIC WW,5 OHM,5W,10%	1	R211
2 070-0501-0	POT,2X50KB,9MM,PLAST KNURL 14MM,.05W	1	R114
2 070-0506-0	POT,50KA,9MM,PLASTIC KNURL 14MM,.05W	1	R12-volume
2 070-0508-0	POT,1K TRIM,6MM,SLOT,.3W	1	R207
2 070-0509-0	POT,20K TRIM,6MM,SLOT,.3W	1	R174
2 070-0514-0	POT,50KB,LINEAR,9MM,METAL KNURL 9MM,.1	7	R72,88,96,107,120,134,151-all other pots
2 090-0010-0	SWITCH,PP,DPDT,6A,PC TERM	1	S5
2 090-0012-0	SWITCH,MINI PP,DPDT,.1A BRK/MAKE,PC TER	5	S1,2,3,4,7
2 090-0013-0	SWITCH,PP,DPDT,.2A,PC MOUNT	1	S6
2 092-0201-0	JACK SW-RN112APC,1/4",S-TIP,SLDR TERM	2	J1,6-input
2 092-0202-0	JACK SW-RN114BPC,1/4",S-TIP,S-RING,P.C.	1	J2
2 092-0203-0	JACK SW-RN111PC,1/4",O-TIP,P.C. TERM	3	J4,7,10
2 092-0204-0	JACK SW-RN112BPC,1/4",O-TIP,O-RING,P.C.	1	J3
2 093-0028-0	HEADER,3X.156,MALE,LOCK	2	FOR POWER AND SPEAKER CUT-OFF
2 100-0028-0	BUTTON,SQUARE BLACK CAP - MINI SWITCH	5	
2 145-0056-G	200MB BOARD	1	P.C.B.
1 602-0007-0	FORMS,WARRANTY CARDS	1	