



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	PR650	14-JUN-05	K W P

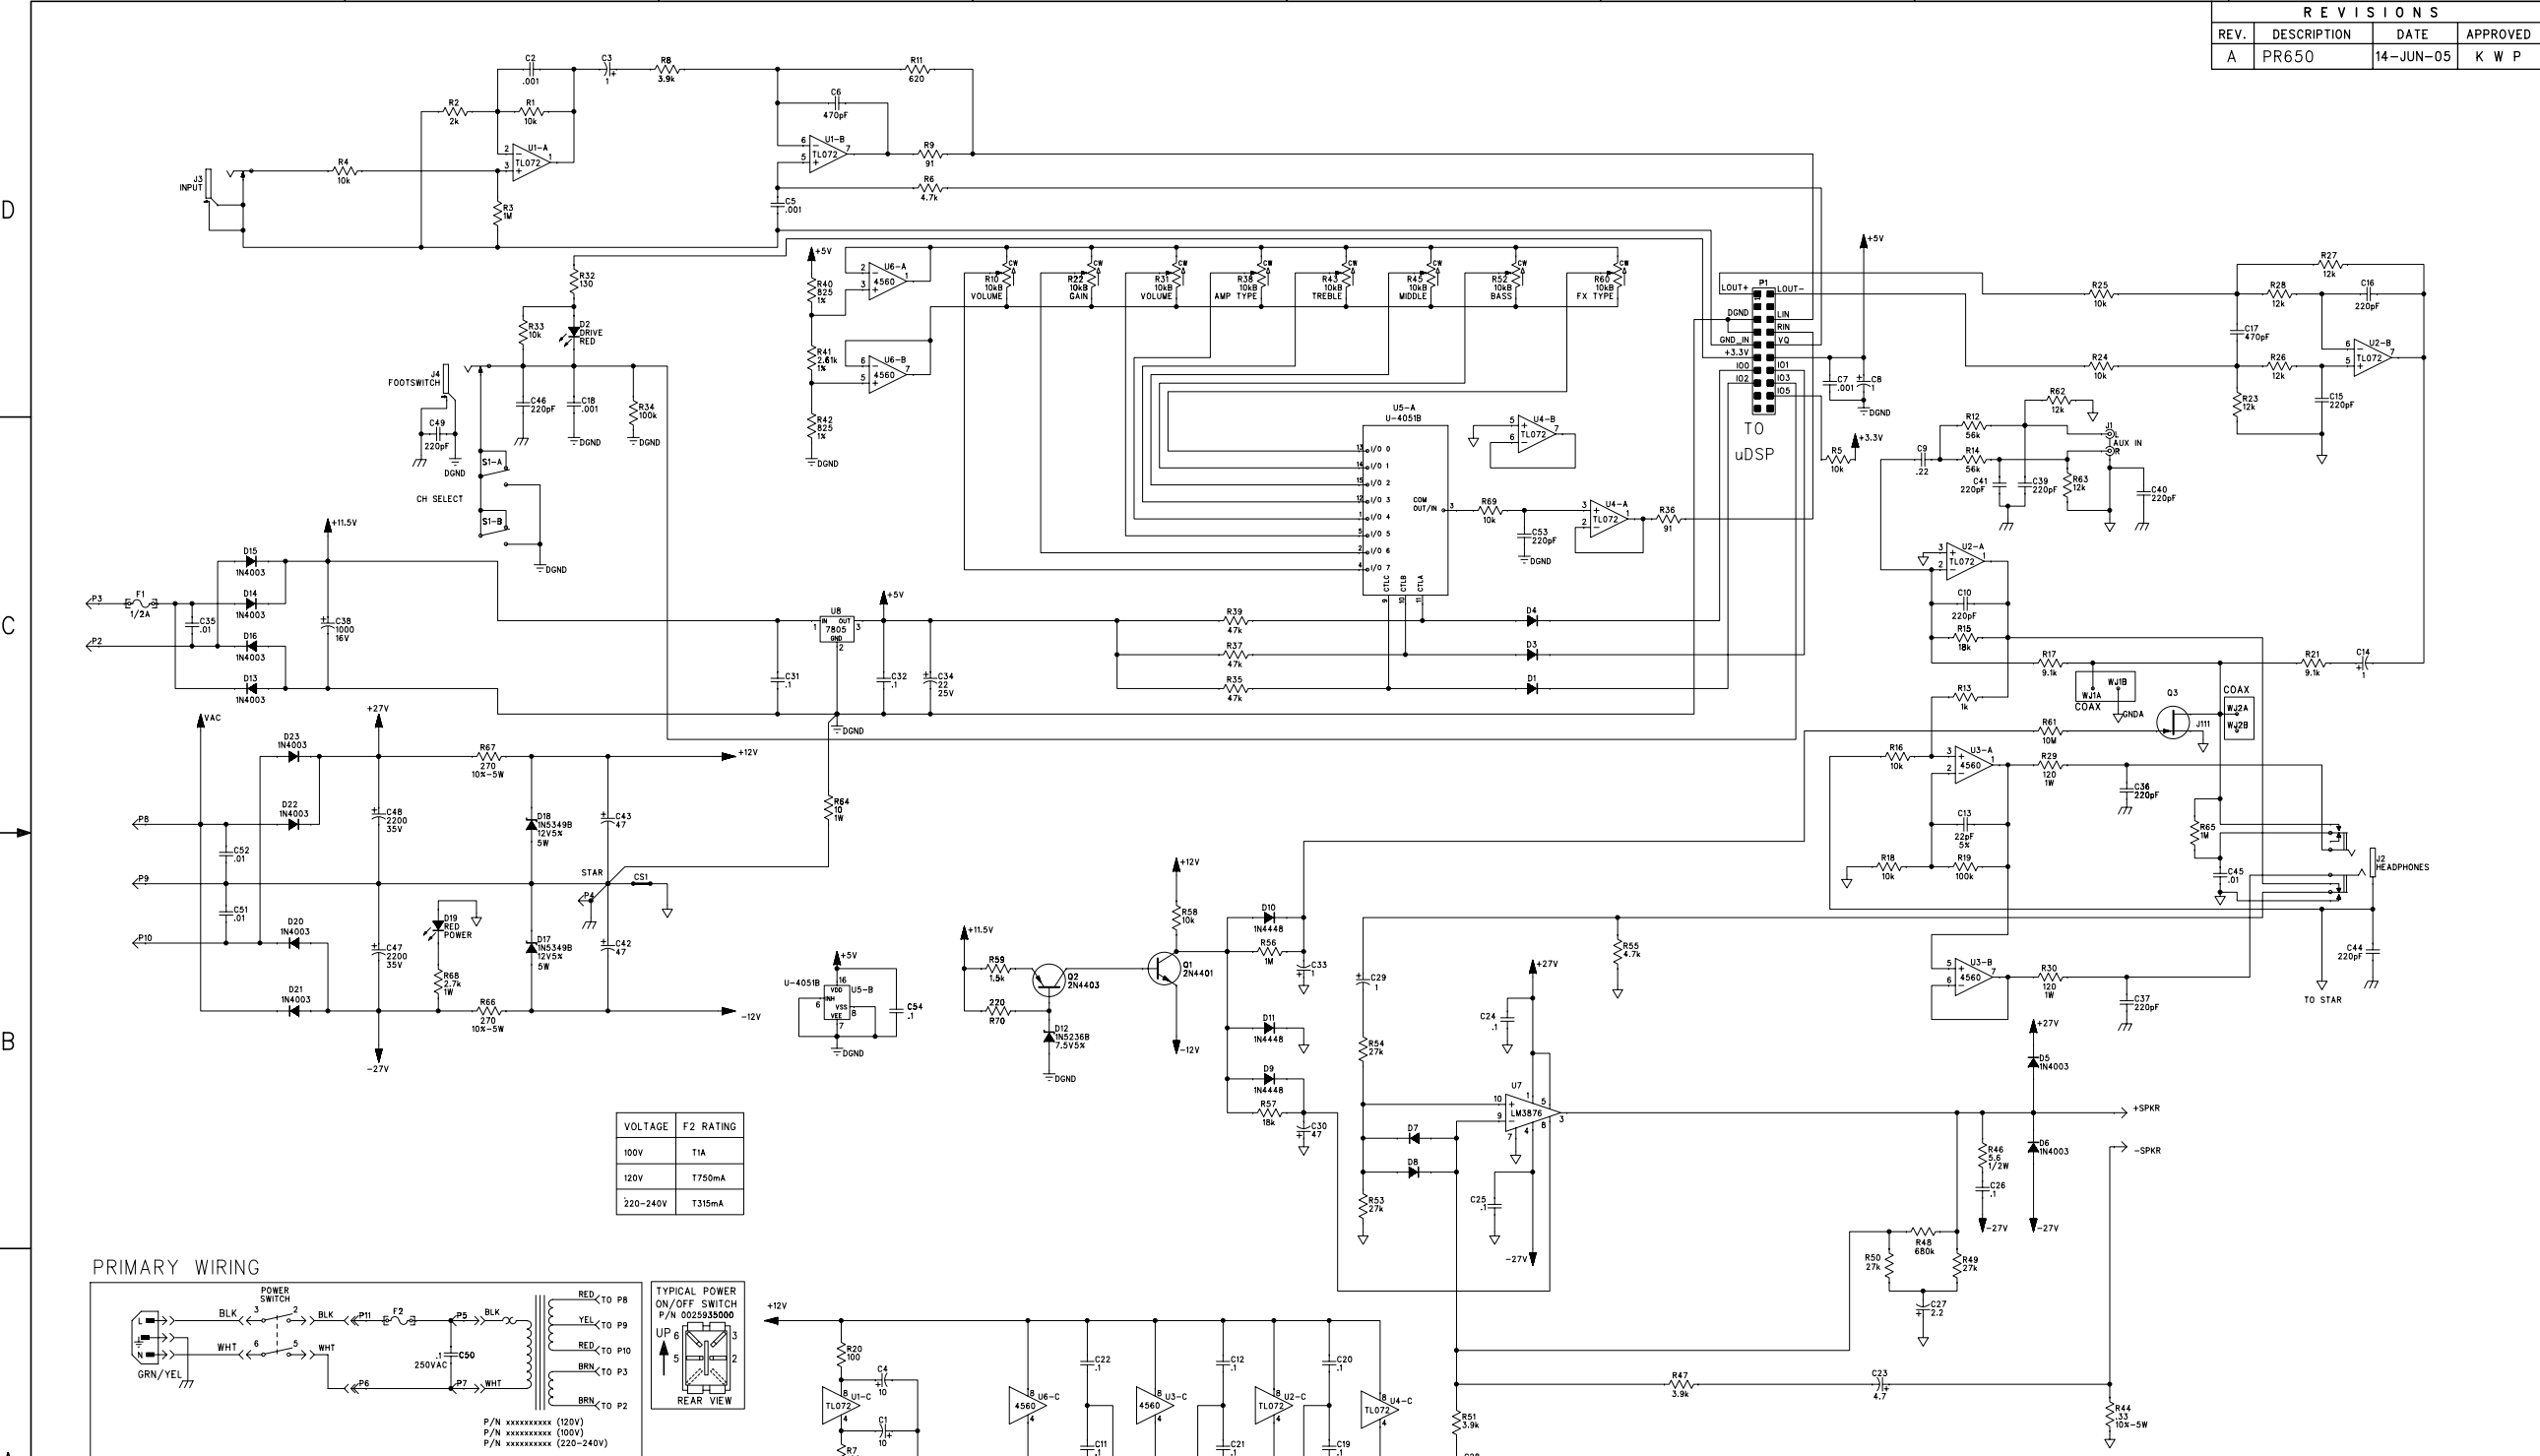

VOLTAGE	F2 RATING
100V	T1A
120V	T750mA
220-240V	T315mA

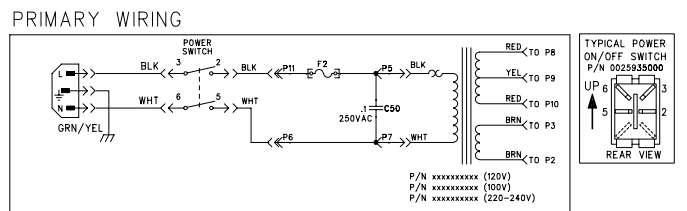

5. THIS SCHEMATIC IS FOR PCB FABRICATION P/N 007777000 AND PCB ASSEMBLY P/N 007777000.
 4. ALL DIODES ARE 1N4448.
 3. ALL POLARIZED CAPACITORS IN uF, 20% OR BETTER, 50V MINIMUM.
 2. ALL UNPOLARIZED CAPACITORS IN uF, 10% OR BETTER, 50V MINIMUM. (POWER SUPPLY BYPASS CAPACITORS ARE 20%).
 1. ALL RESISTORS IN OHMS, 5% 1/4W.

NOTES: (UNLESS OTHERWISE NOTED)

THIS DOCUMENT CONTAINS INFORMATION OF A PROPRIETARY NATURE TO FENDER MUSICAL INSTRUMENTS AND IS SUBMITTED TO YOU IN CONFERENCE AND SHALL NOT BE DISCLOSED OR TRANSMITTED TO OTHERS WITHOUT AUTHORIZATION FROM FENDER MUSICAL INSTRUMENTS.

Fender MUSICAL INSTRUMENTS
 Corona, CA U.S.A.

CHECKED BY: _____
 DATE: _____
 APPROVED BY: _____
 DATE: _____
 DRAWN: K. PORTER ENGR: K. PORTER
 DATABASE FILE: Z650S.SCH

TITLE: SERVICE DIAGRAM, COMBINED (schematic)
 FM25 DSP
 Main PCB assy

SIZE: _____
 DRAWING NUMBER: **D 0070201000**
 REV. **A**

RELEASE DATE: 14-JUN-05 SHEET: 1 OF 2