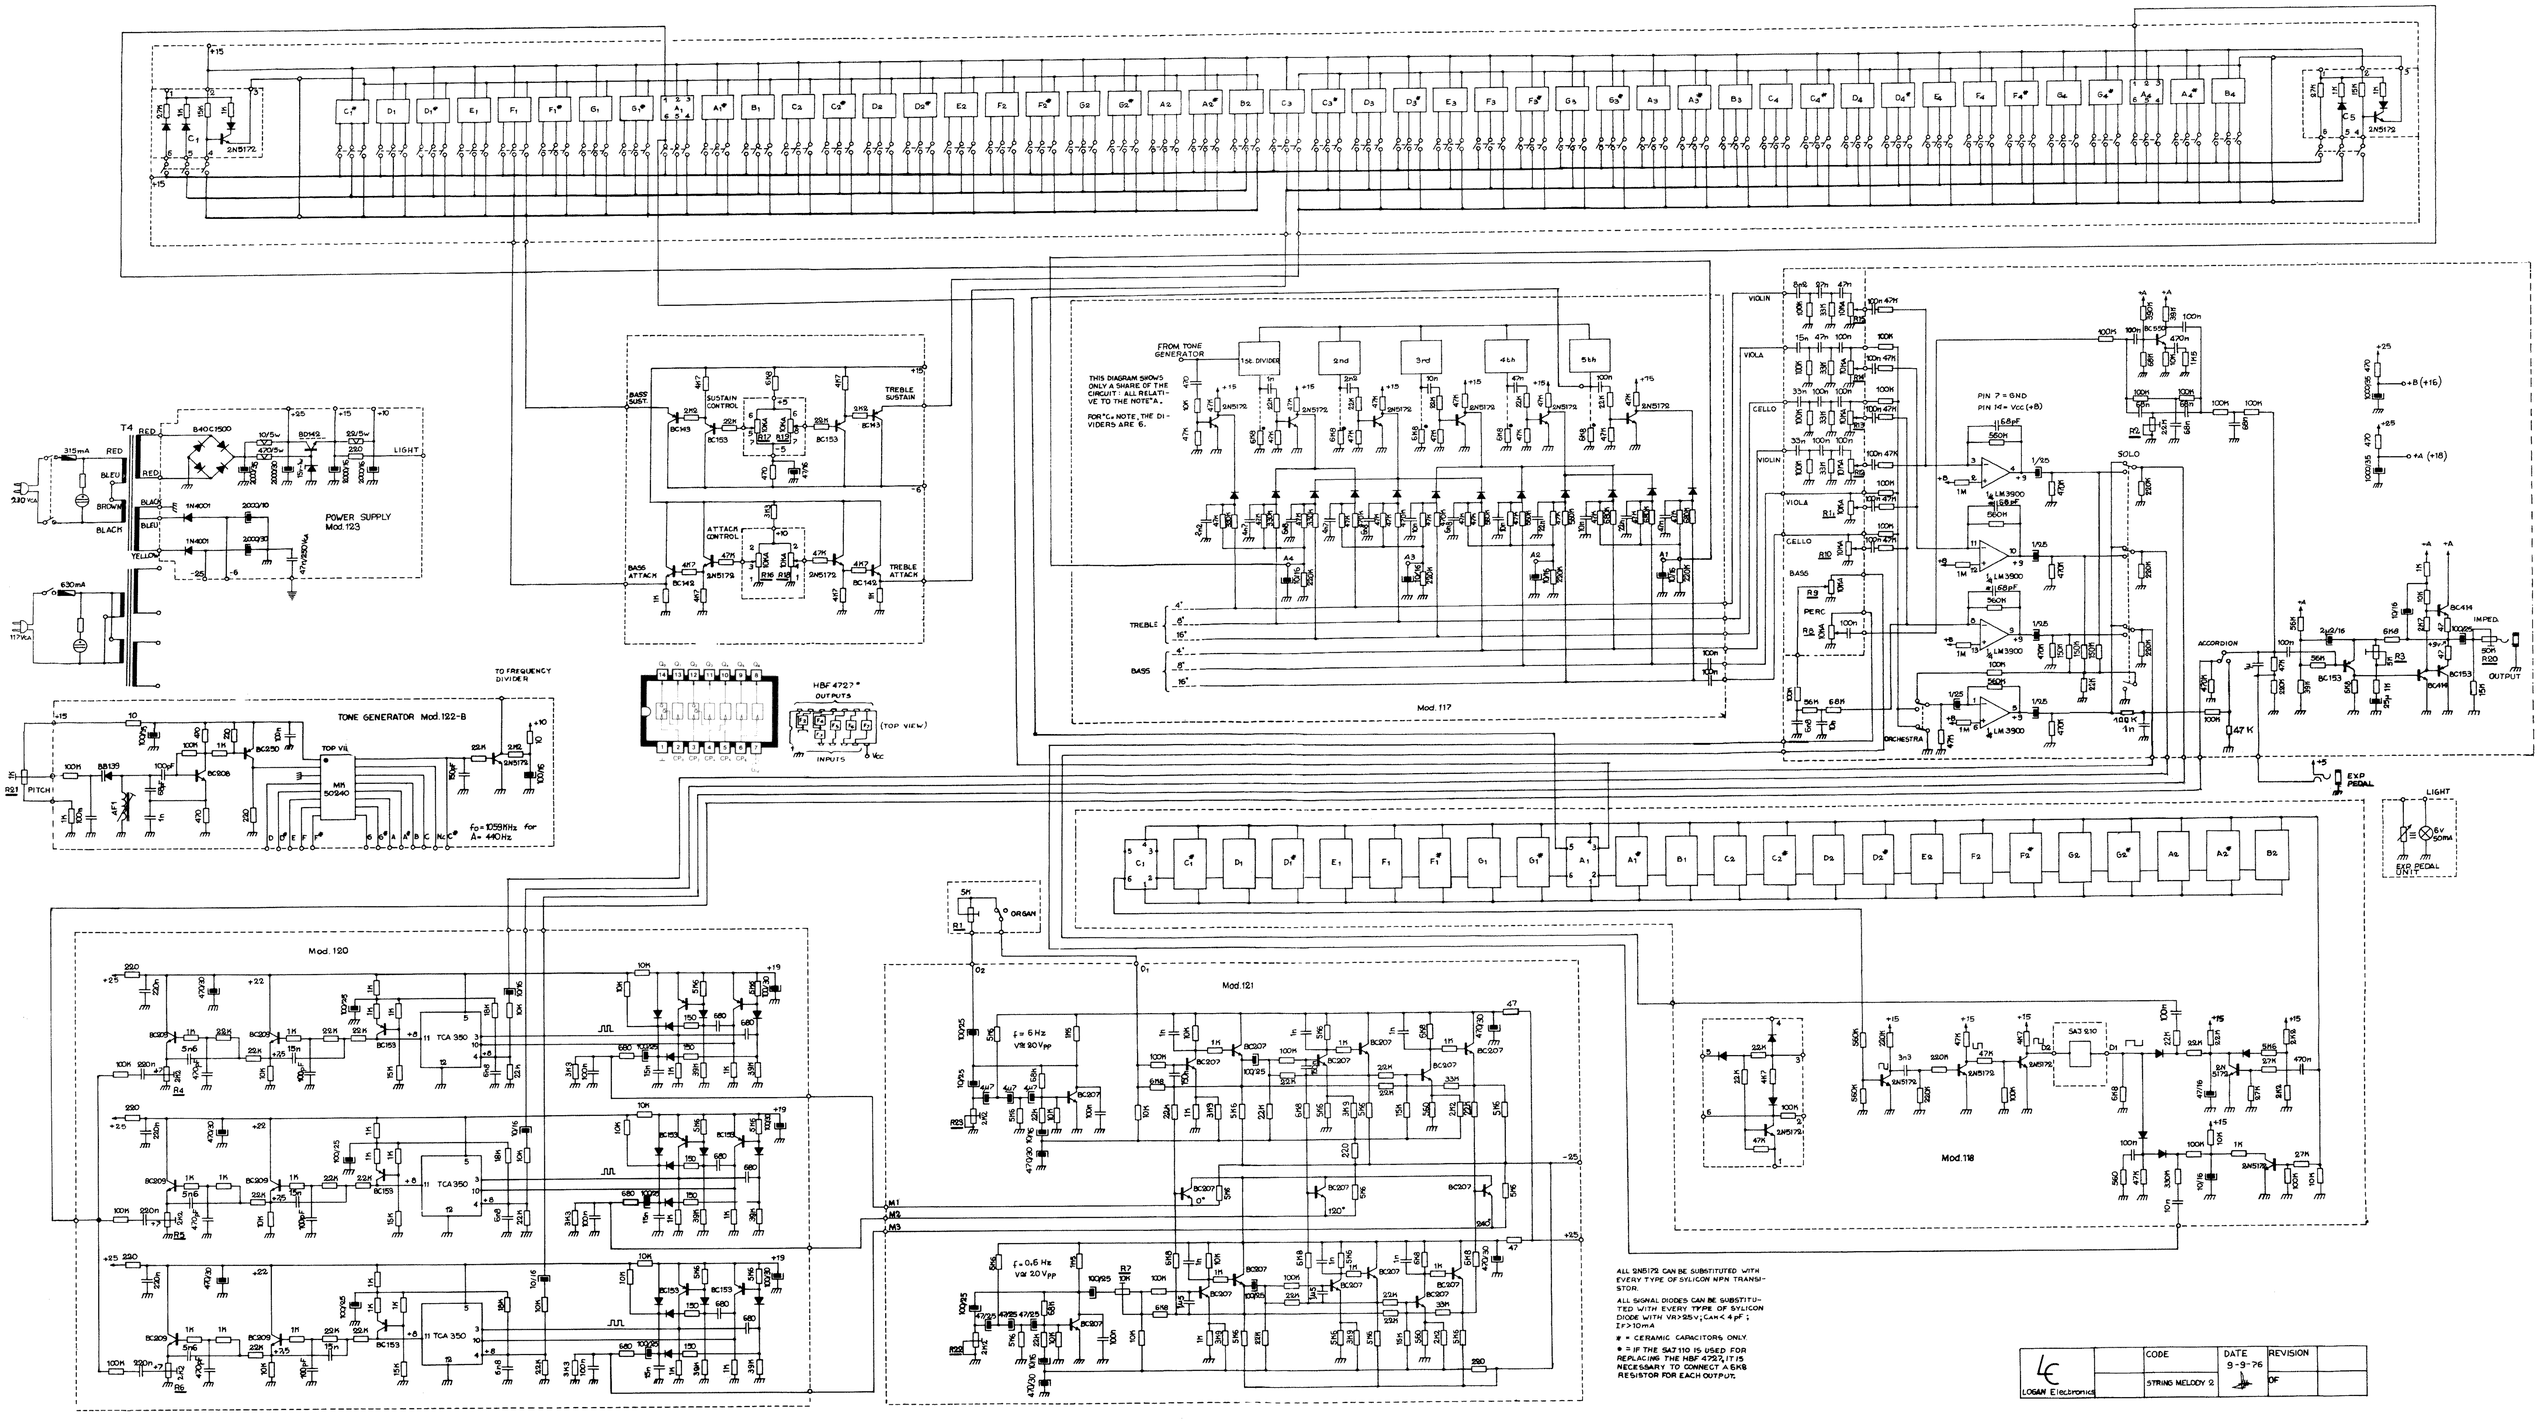

ALL 2N5172 CAN BE SUBSTITUTED WITH EVERY TYPE OF SYLICON NPN TRANSISTOR.

ALL SIGNAL DIODES CAN BE SUBSTITUTED WITH EVERY TYPE OF SYLICON DIODE WITH VR>25V; CJ<4 pF; IF>10mA

* = CERAMIC CAPACITORS ONLY.

* = IF THE SA7110 IS USED FOR REPLACING THE HBF 4727/1715 NECESSARY TO CONNECT A 6K8 RESISTOR FOR EACH OUTPUT.

LOGAN Electronics	CODE	DATE 9-9-76	REVISION	
	STRING MELODY 2		OF	