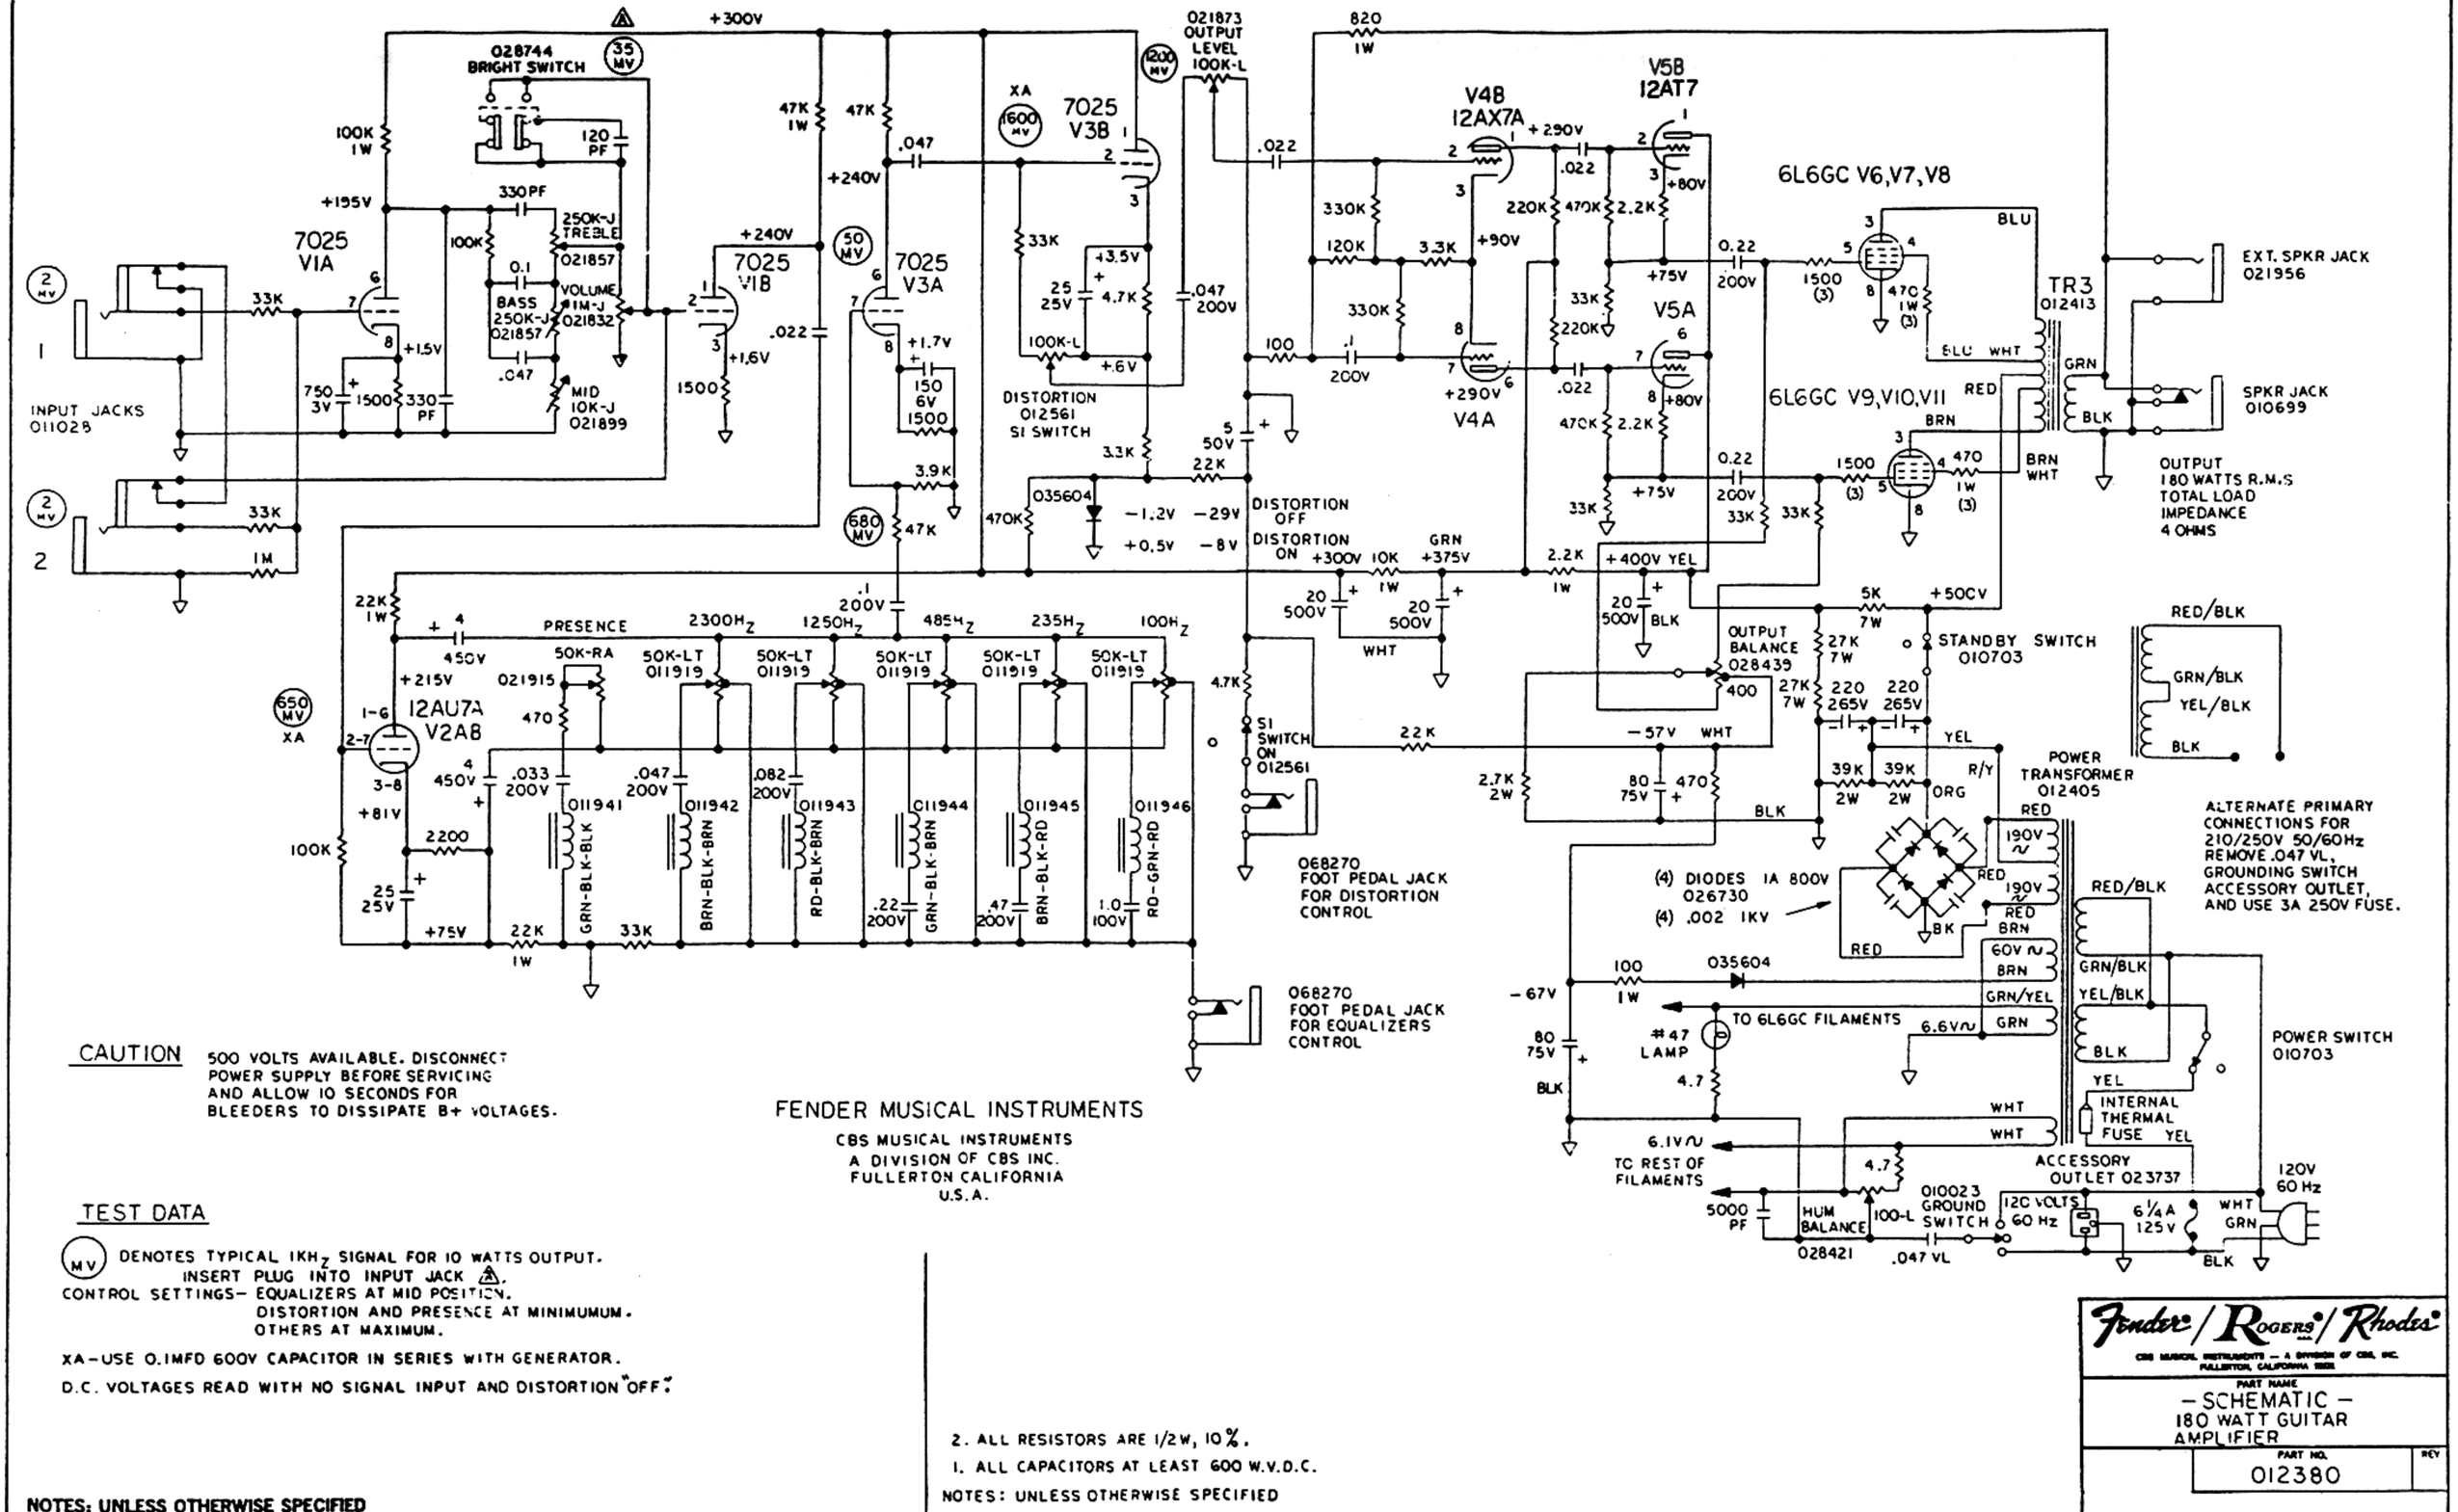

CAUTION 500 VOLTS AVAILABLE. DISCONNECT POWER SUPPLY BEFORE SERVICING AND ALLOW 10 SECONDS FOR BLEEDERS TO DISSIPATE B+ VOLTAGES.

FENDER MUSICAL INSTRUMENTS

CBS MUSICAL INSTRUMENTS
A DIVISION OF CBS INC.
FULLERTON CALIFORNIA
U.S.A.

TEST DATA

(MV) DENOTES TYPICAL 1KHZ SIGNAL FOR 10 WATTS OUTPUT. INSERT PLUG INTO INPUT JACK (A).

CONTROL SETTINGS– EQUALIZERS AT MID POSITION.
DISTORTION AND PRESENCE AT MINIMUMUM.
OTHERS AT MAXIMUM.

XA–USE 0.1MFD 600V CAPACITOR IN SERIES WITH GENERATOR.

D.C. VOLTAGES READ WITH NO SIGNAL INPUT AND DISTORTION "OFF."

NOTES: UNLESS OTHERWISE SPECIFIED

2. ALL RESISTORS ARE 1/2W, 10%.
1. ALL CAPACITORS AT LEAST 600 W.V.D.C.

NOTES: UNLESS OTHERWISE SPECIFIED

Fender / Rogers / Rhodes
CBS MUSICAL INSTRUMENTS — A DIVISION OF CBS, INC. FULLERTON, CALIFORNIA

PART NAME
– SCHEMATIC –
180 WATT GUITAR AMPLIFIER

PART NO. 012380 REV