

# FENDER "CONCERT" SCHEMATIC


## MODEL 6G12-A

K-FJ

### NOTICE

- 1- VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER. VALUES SHOWN  $\pm$  OR  $- 20\%$
- 2- ALL RESISTORS  $\frac{1}{2}$  WATT,  $10\%$  TOLERANCE IF NOT SPECIFIED
- 3- ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED

CIRCUIT PATENTS #2,817,708, #2,973,681  
TONE CONTROL CIRCUITS PAT. PEND.

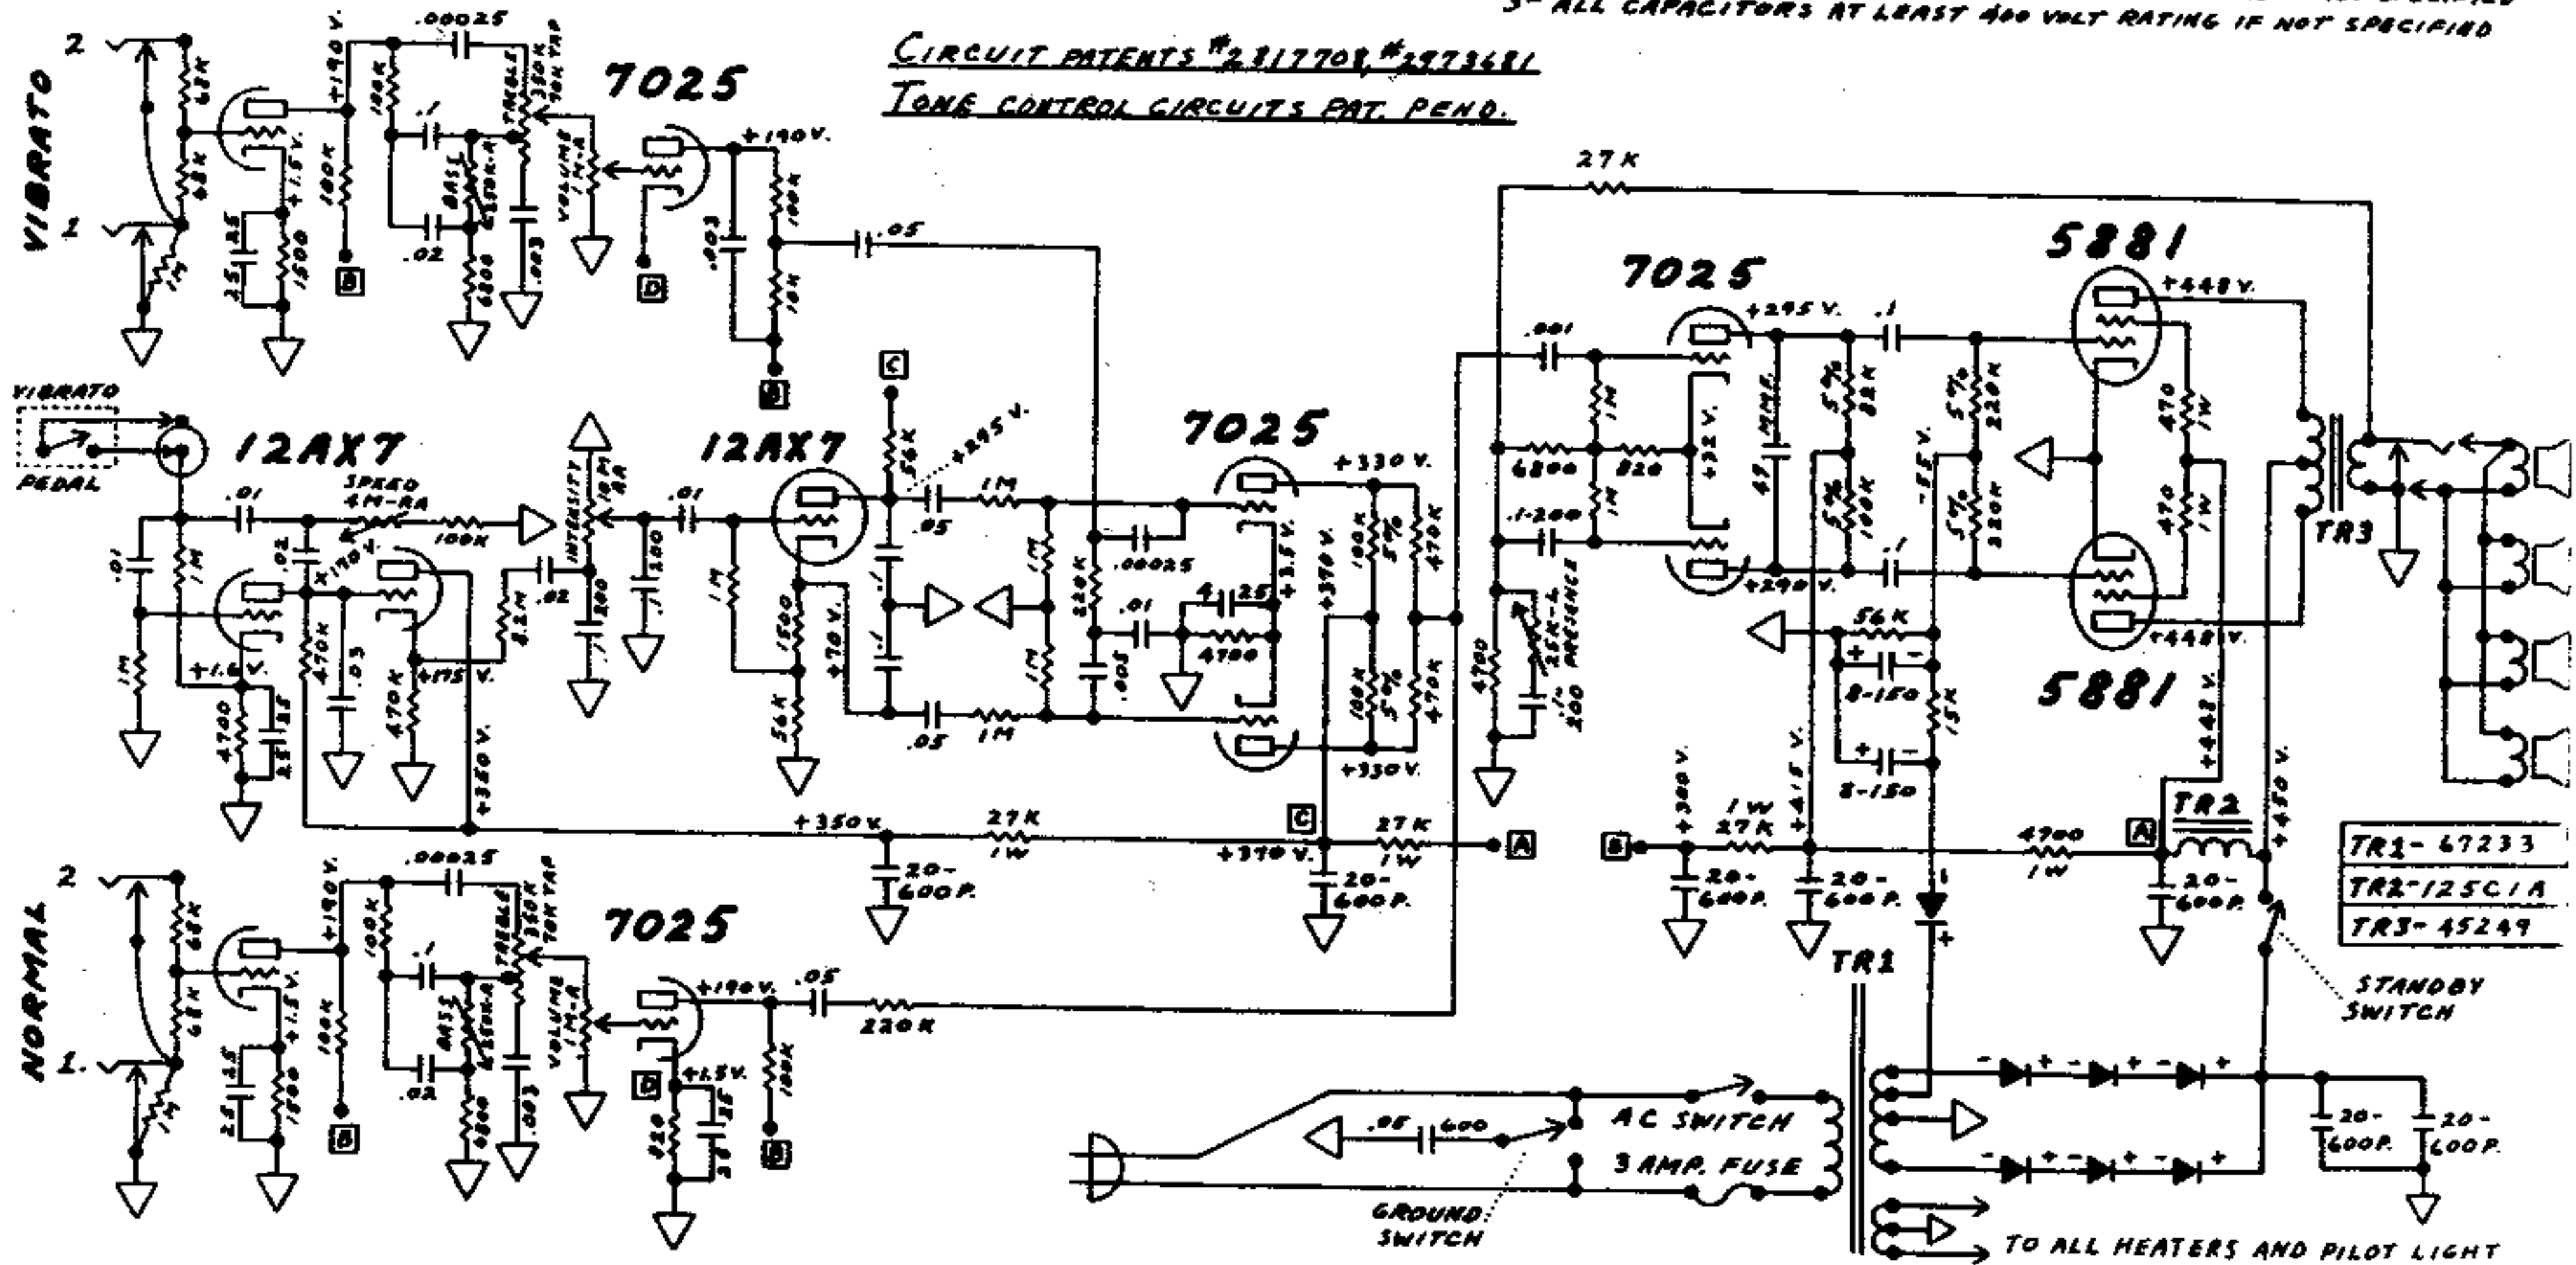

TR1- 67233
TR2- 125C1A
TR3- 45249

STANDBY SWITCH

GROUND SWITCH


TO ALL HEATERS AND PILOT LIGHT

# FENDER "CONCERT" LAYOUT

## MODEL 6G12-A

### NOTICE

VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER. VALUES SHOWN + OR - 20%.

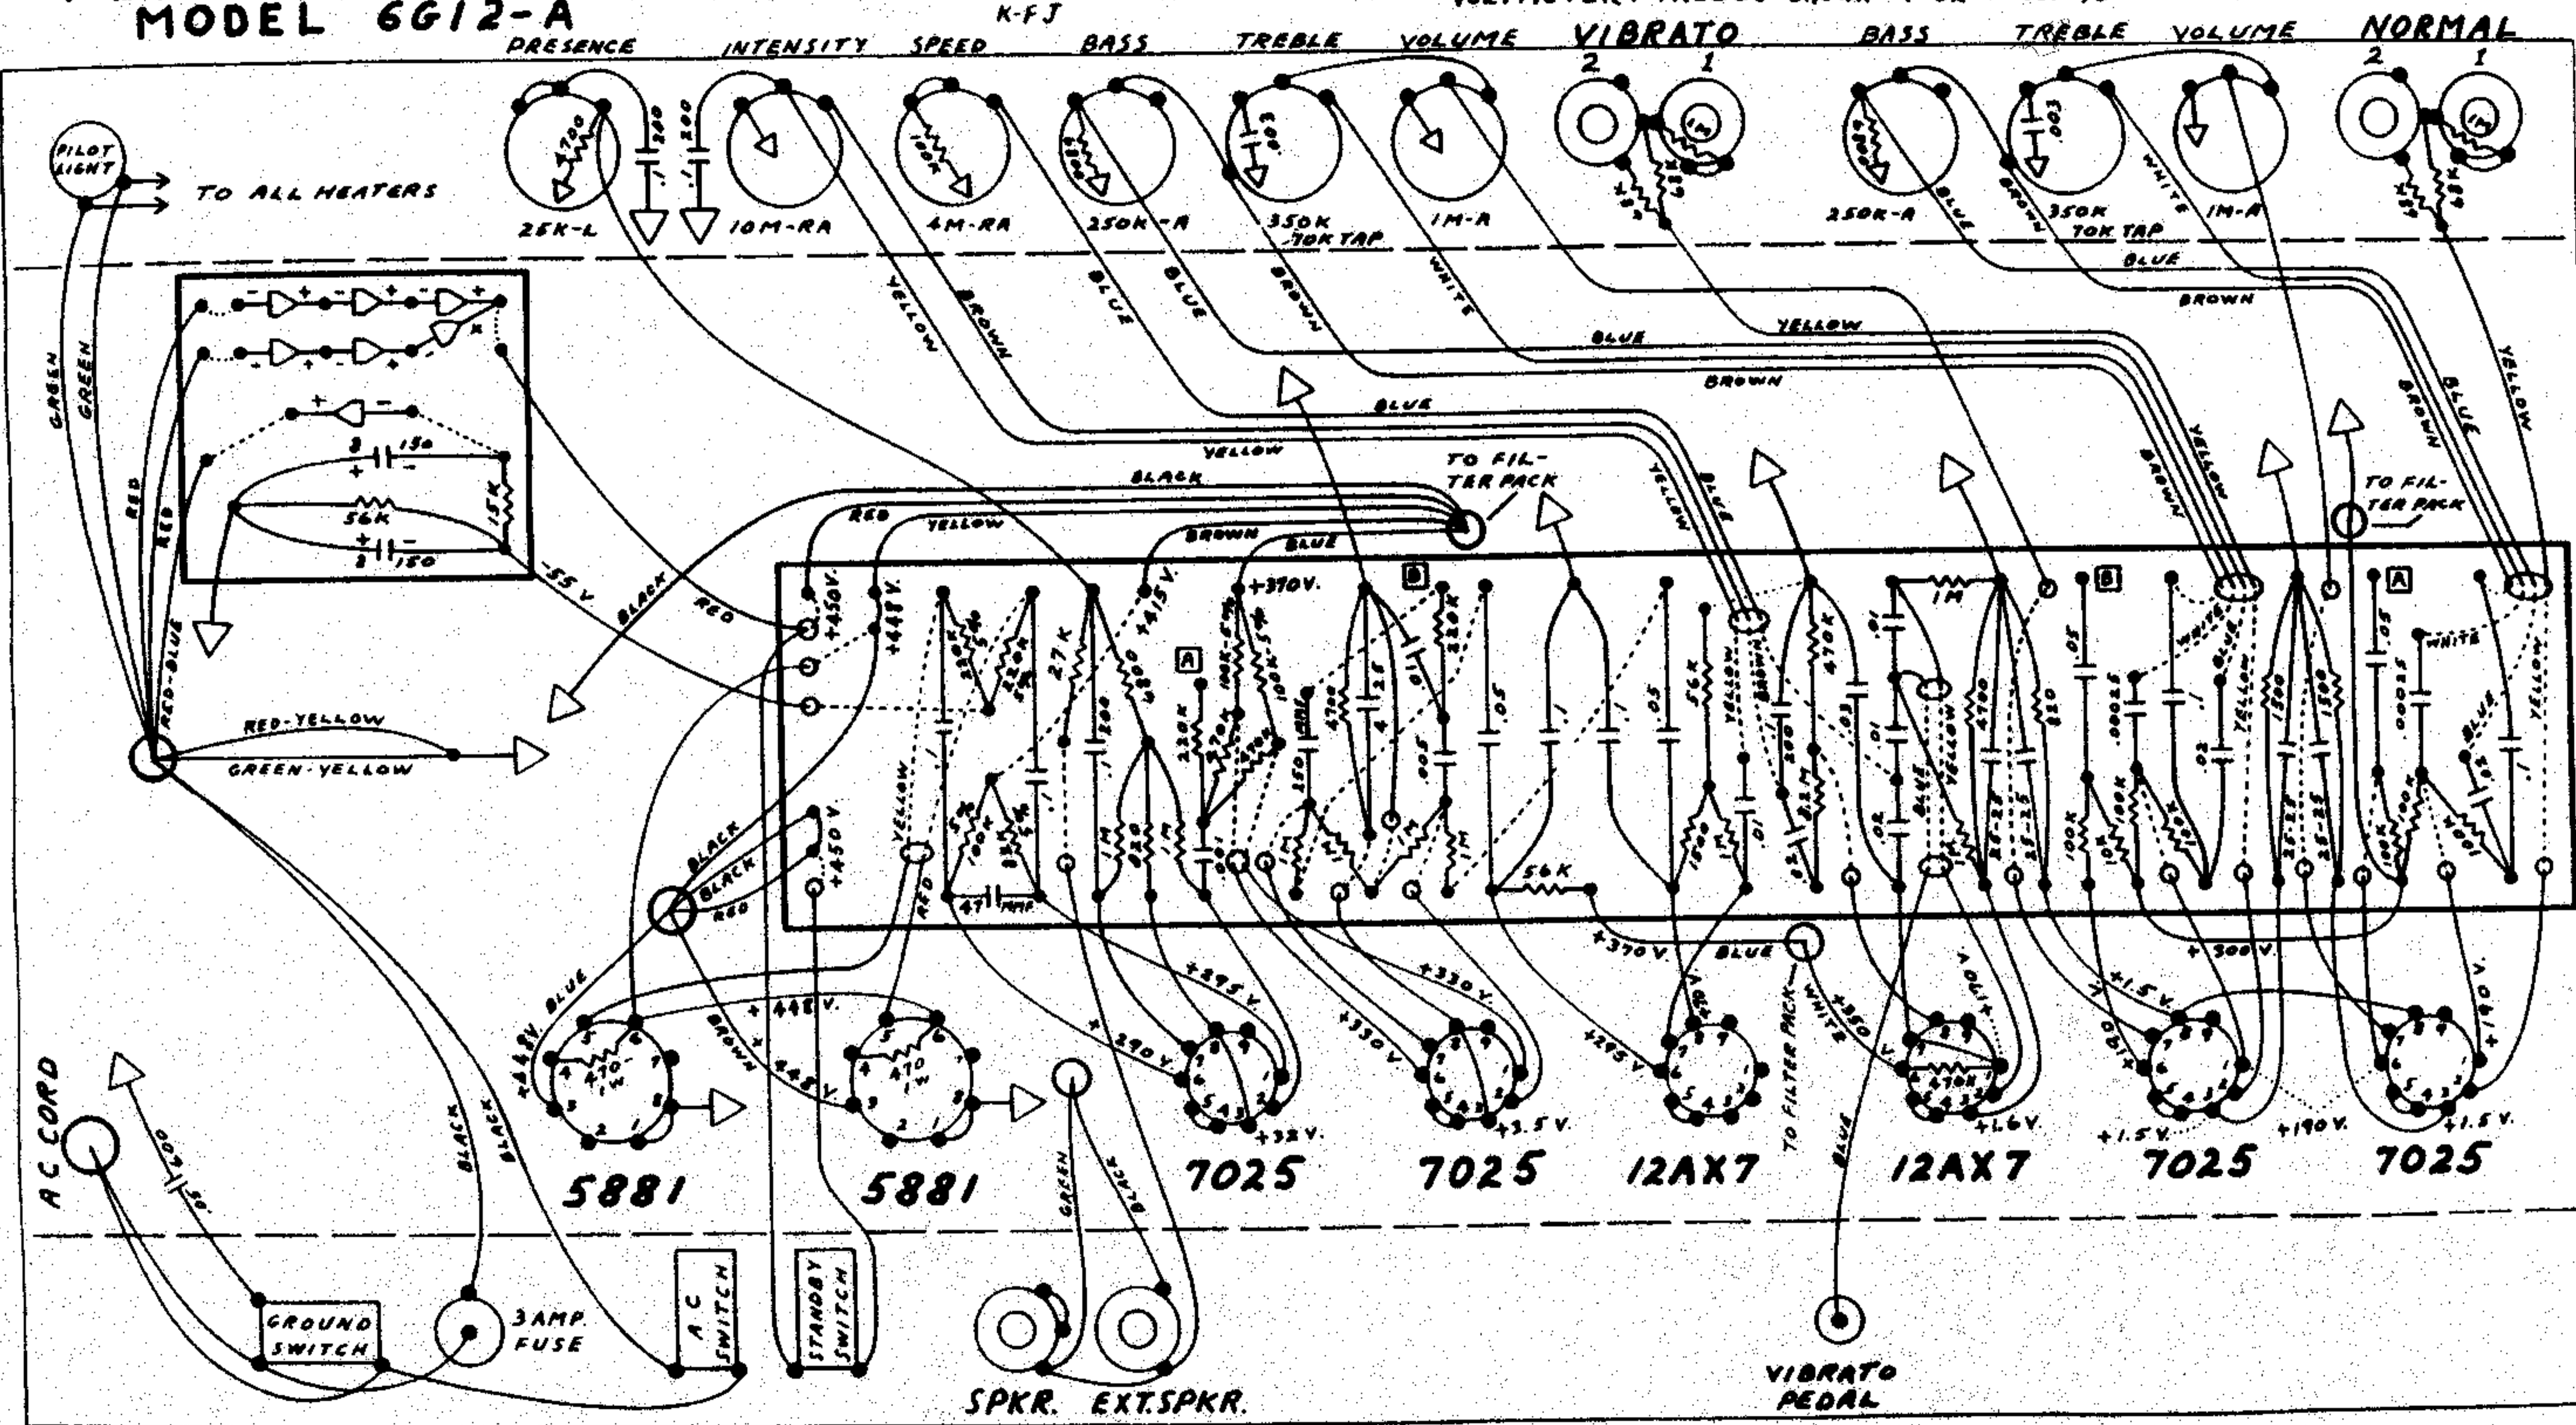

NOTE - ALL RESISTORS 1/2 WATT, 10% TOLERANCE, UNLESS SPECIFIED.

NOTE - ALL CAPACITORS AT LEAST 400 VOLT RATING UNLESS SPECIFIED