


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
0	RELEASE FOR PROTOTYPE	11/20/84	[Signature]
1	RELEASE FOR PRODUCTION	12/19/84	[Signature]

QTY	CODE	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				
lexicon				
PC SCHEMATIC, SERIAL OPTION BOARD, M1300				
APPROVALS		DATE		
DRAWN		11/20/84		
CHECKED		SIZE		
ISSUED		FSCM NO.		
FINISH		DWG. NO.		
APPLICATION		SCALE		
DO NOT SCALE DRAWING		SHEET 2 OF 2		

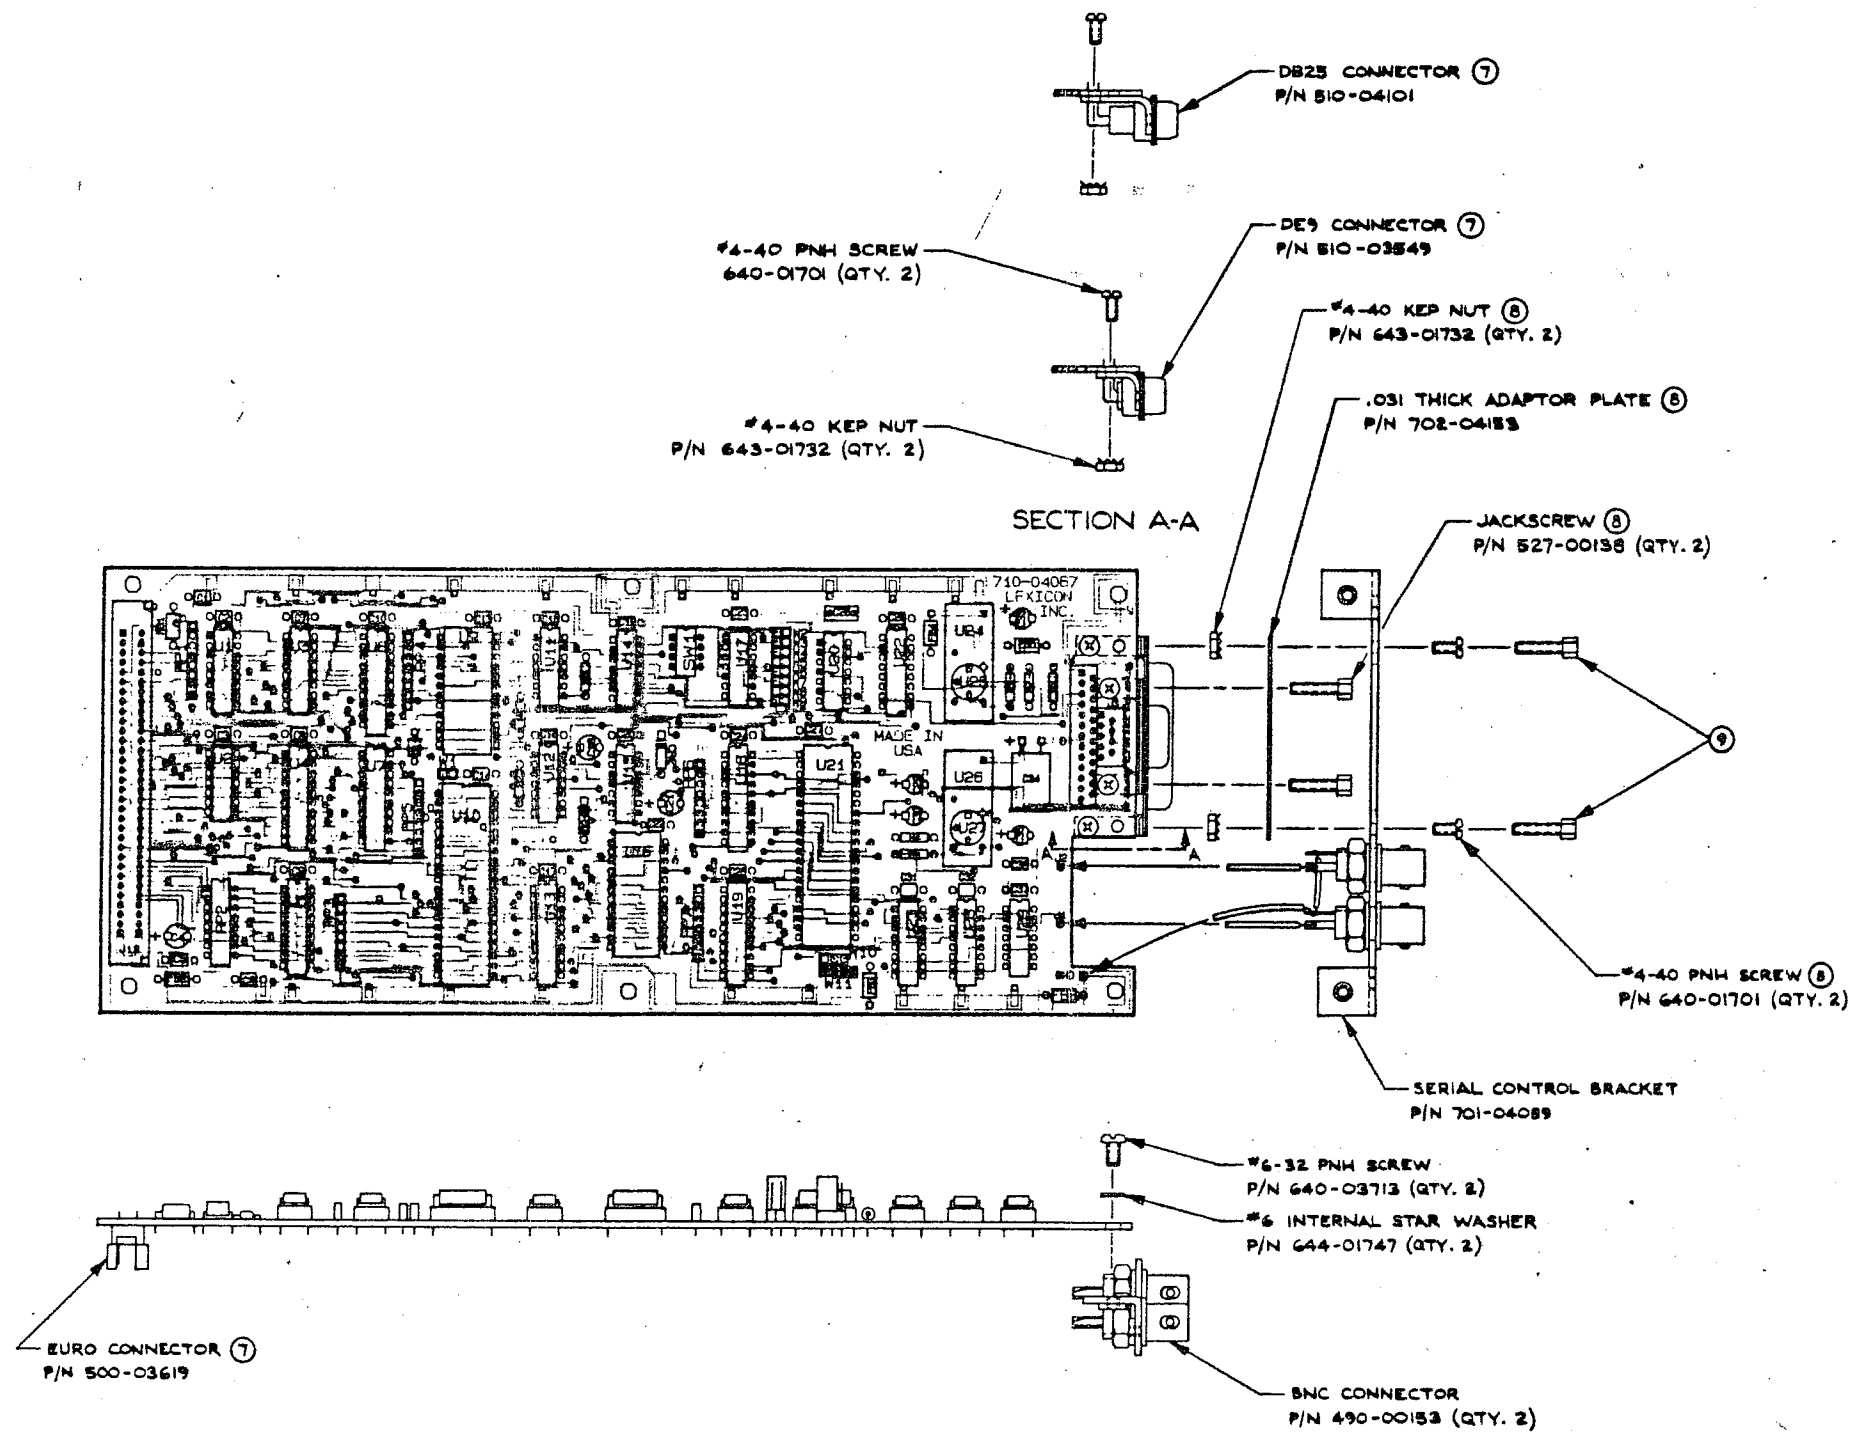

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
0	RELEASE FOR PRODUCTION	1/16/85	[Signature]

NOTES

1. REFER TO LEXICON BOM NO. 022-04092.
2. SOLDERMASK HOLES, THAT ARE INDICATED BY SOLID PADS.
3. MAXIMUM COMPONENT HEIGHT .500".
4. MAXIMUM SOLDER TAIL PROTRUSION .080".
5. DO NOT SOCKET RP2 OR SW1.
6. LIE DOWN CAPACITOR C54 WITH A PIECE OF DOUBLE-SIDED TAPE UNDERNEATH.
7. INSTALL J3 (DE9), J4 (DB25) & J19 ON SOLDER SIDE AND SOLDER FROM COMPONENT SIDE, THEY MUST BE POSITIONED AS SHOWN.
8. USE AND POSITION AS SHOWN WHEN J3 (DE9) CONNECTOR IS USED.
9. USE JACKSCREWS IN POSITION SHOWN WHEN J4 (DB25) CONNECTOR IS USED.
10. APPLY A SMALL AMOUNT OF SILICONE ADHESIVE TO ALL FERRITE BEADS.
11. INSTALL W4 AND W10 JUMPERS (PINS 1 AND 2).
12. DO NOT INSTALL W11 JUMPER POSTS.
13. OBSERVE STATIC PRECAUTIONS.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		lexicon	
MATERIAL		APPROVAL	DATE	M1300 SERIAL OPTION BOARD ASSEMBLY	
M1300/S		DATE	1/16/85	SIZE	FORM NO.
REV. A	ISS. 01	DESIGNED	[Signature]	D	080-04072
APPLICATION		DO NOT SCALE DRAWING	SCALE	1/1	SHEET 1 OF 1