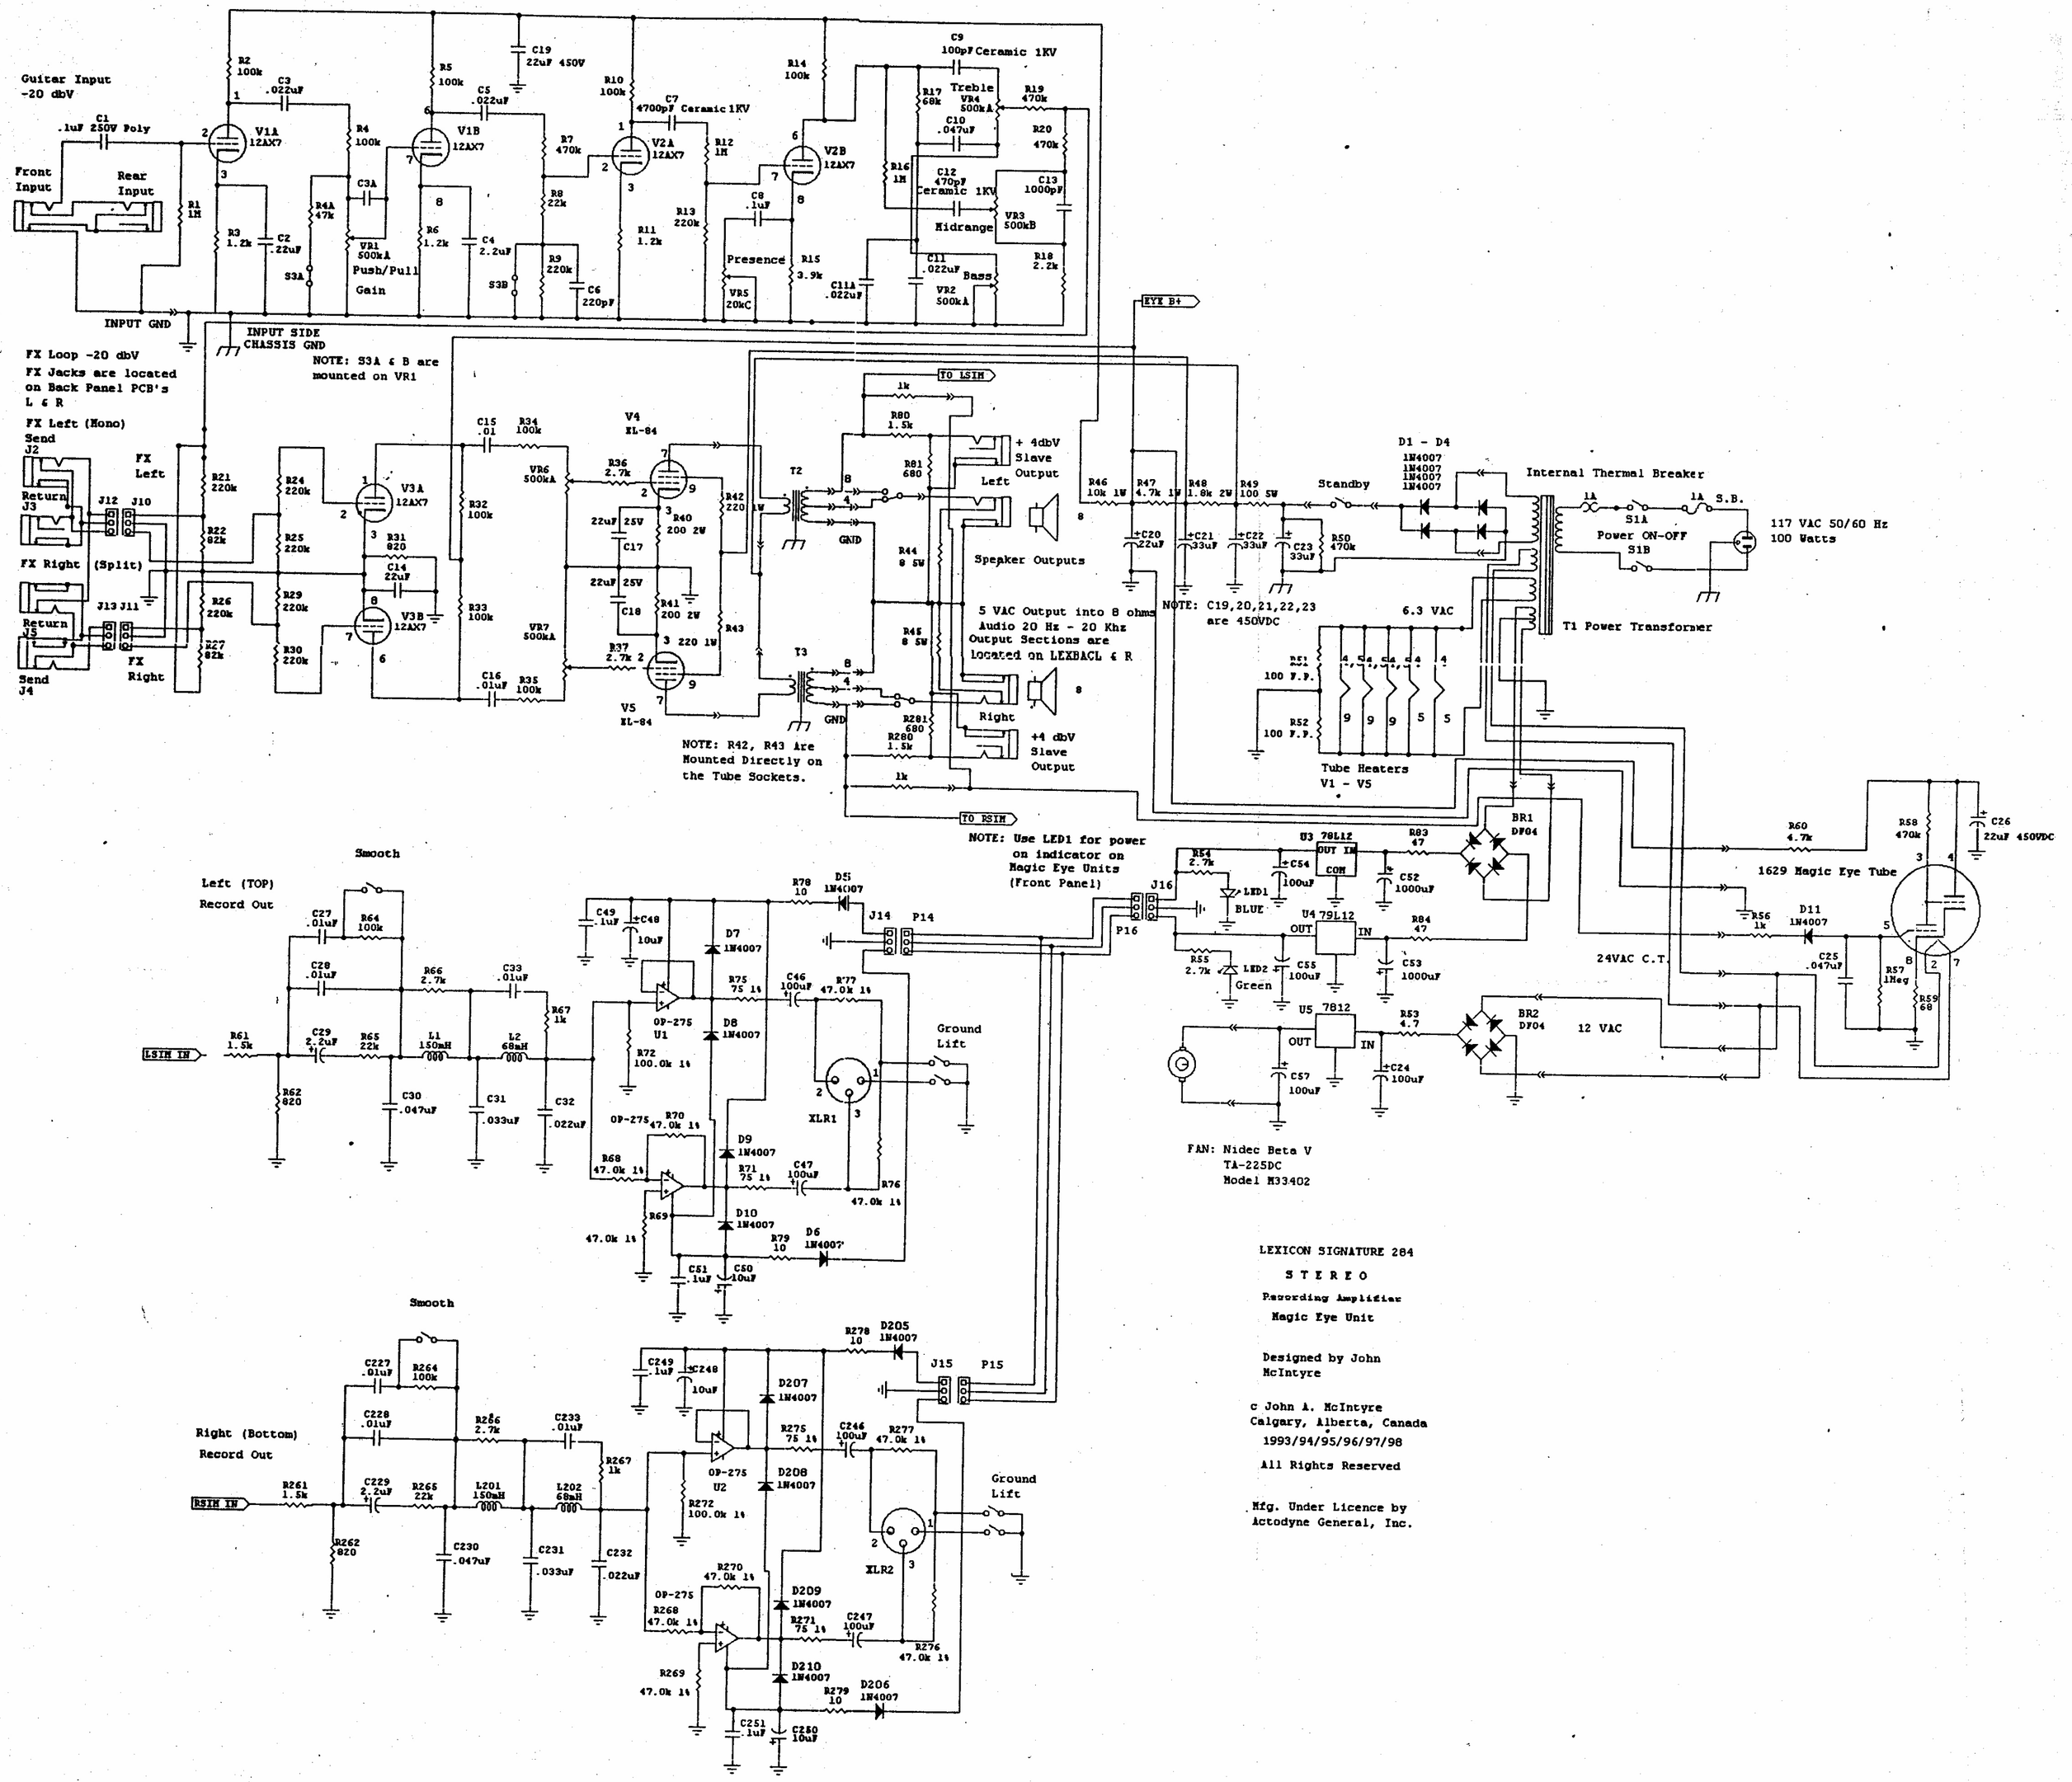
Guitar Input
-20 dbV
Front Input
Rear Input
INPUT GND
INPUT SIDE CHASSIS GND
FX Loop -20 dbV
FX Jacks are located on Back Panel PCB's L & R
FX Left (Mono)
Send J2
Return J3
FX Left
FX Right (Split)
Return J5
Send J4
FX Right
NOTE: S3A & B are mounted on VR1
Push/Pull
Gain
Presence
Treble
Midrange
Bass
NOTE: R42, R43 are Mounted Directly on the Tube Sockets.
TO LSIM
TO RSIM
+ 4dbV Slave Output
Left
Speaker Outputs
Right
+4 dbV Slave Output
5 VAC Output into 8 ohms Audio 20 Hz - 20 Khz Output Sections are located on LEXBACL & R
NOTE: Use LED1 for power on indicator on Magic Eye Units (Front Panel)
EYE B+
Standby
Internal Thermal Breaker
Power ON-OFF
117 VAC 50/60 Hz 100 Watts
NOTE: C19,20,21,22,23 are 450VDC
6.3 VAC
T1 Power Transformer
Tube Heaters V1 - V5
1629 Magic Eye Tube
24VAC C.T.
12 VAC
FAN: Nidec Beta V TA-225DC Model M33402
Left (TOP) Record Out
Right (Bottom) Record Out
Smooth
LSIM IN
RSIM IN
Ground Lift
XLR1
XLR2
LEXICON SIGNATURE 284
STEREO
Recording Amplifier
Magic Eye Unit
Designed by John McIntyre
c John A. McIntyre
Calgary, Alberta, Canada
1993/94/95/96/97/98
All Rights Reserved
Mfg. Under Licence by Actodyne General, Inc.