

GENERAL INFORMATION

This symbol denotes the common connecting points for the various power supply connections throughout the unit. Note that several of these points are marked "source" which denotes the origin of the reference potential.

This symbol denotes B - (amplifier chassis ground).




Arrows indicate the direction of audio signal flow through the circuits.

This symbol indicates plug and socket terminal connections. Where it is not practical to draw the assembly as a complete unit.


1. All capacitors in MFD unless otherwise indicated.
2. All resistors 1/2W 10% unless otherwise indicated.
3. All voltage readings made with 20,000 ohm per volt meter (voltages -10%) with no signal applied.
4. Arrow drawn on pot. arm indicated clockwise rotation.

WESTMINSTER
V 118




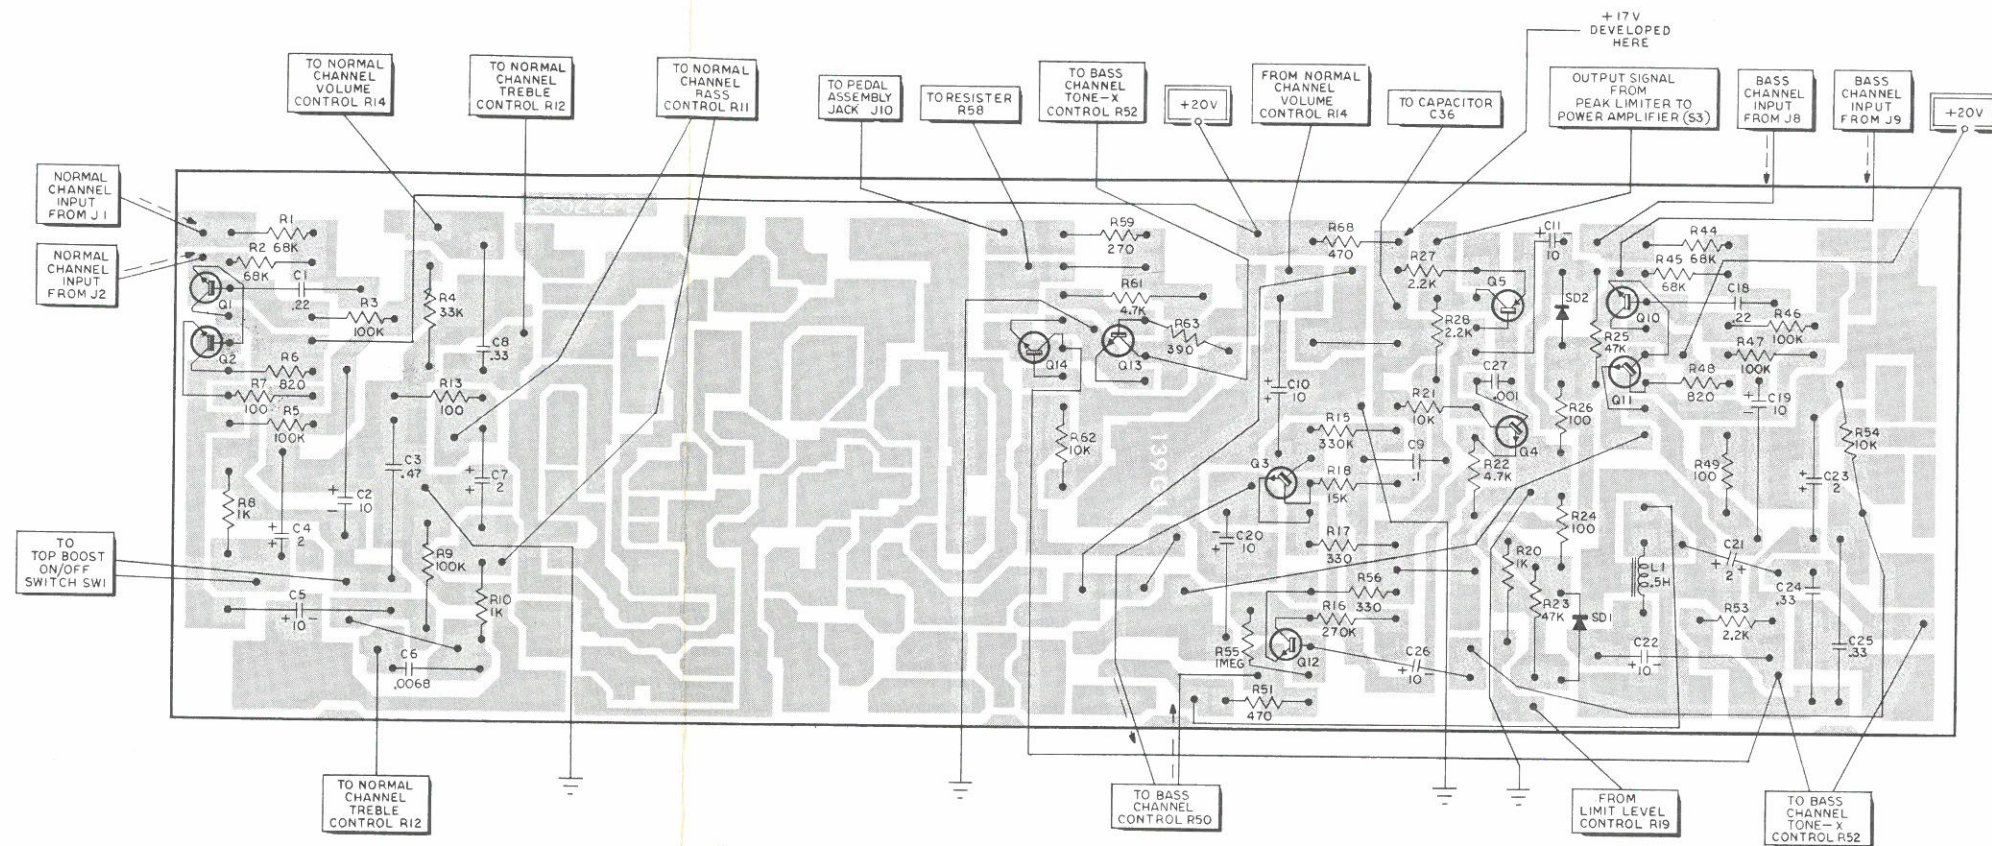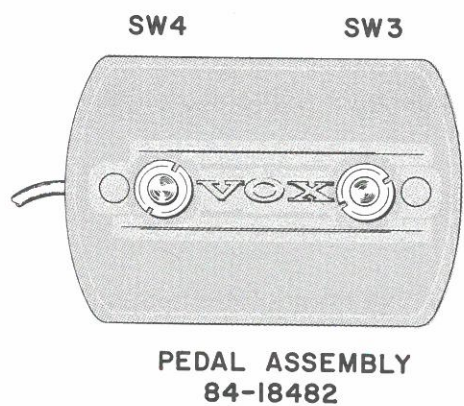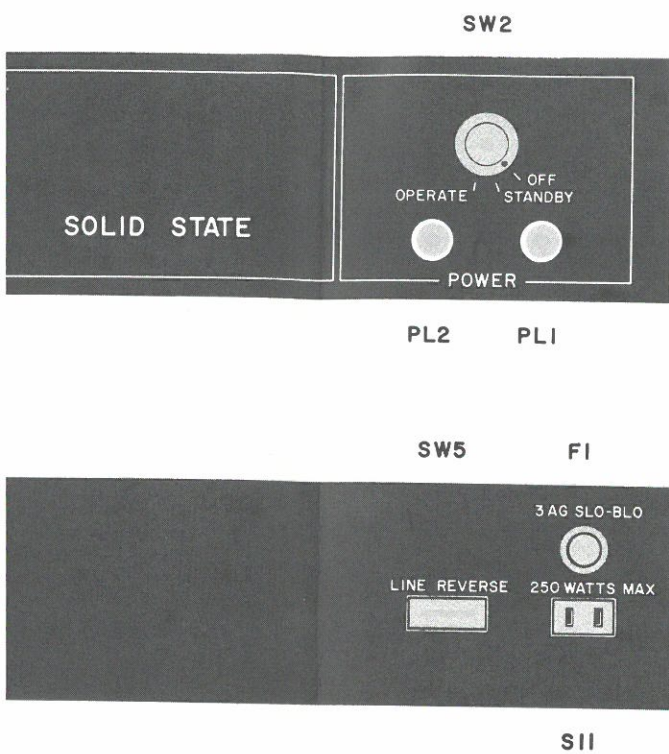

PREAMP P.C. BOARD & COMPONENTS
84-18415-1
(SHOWN COPPER SIDE UP)

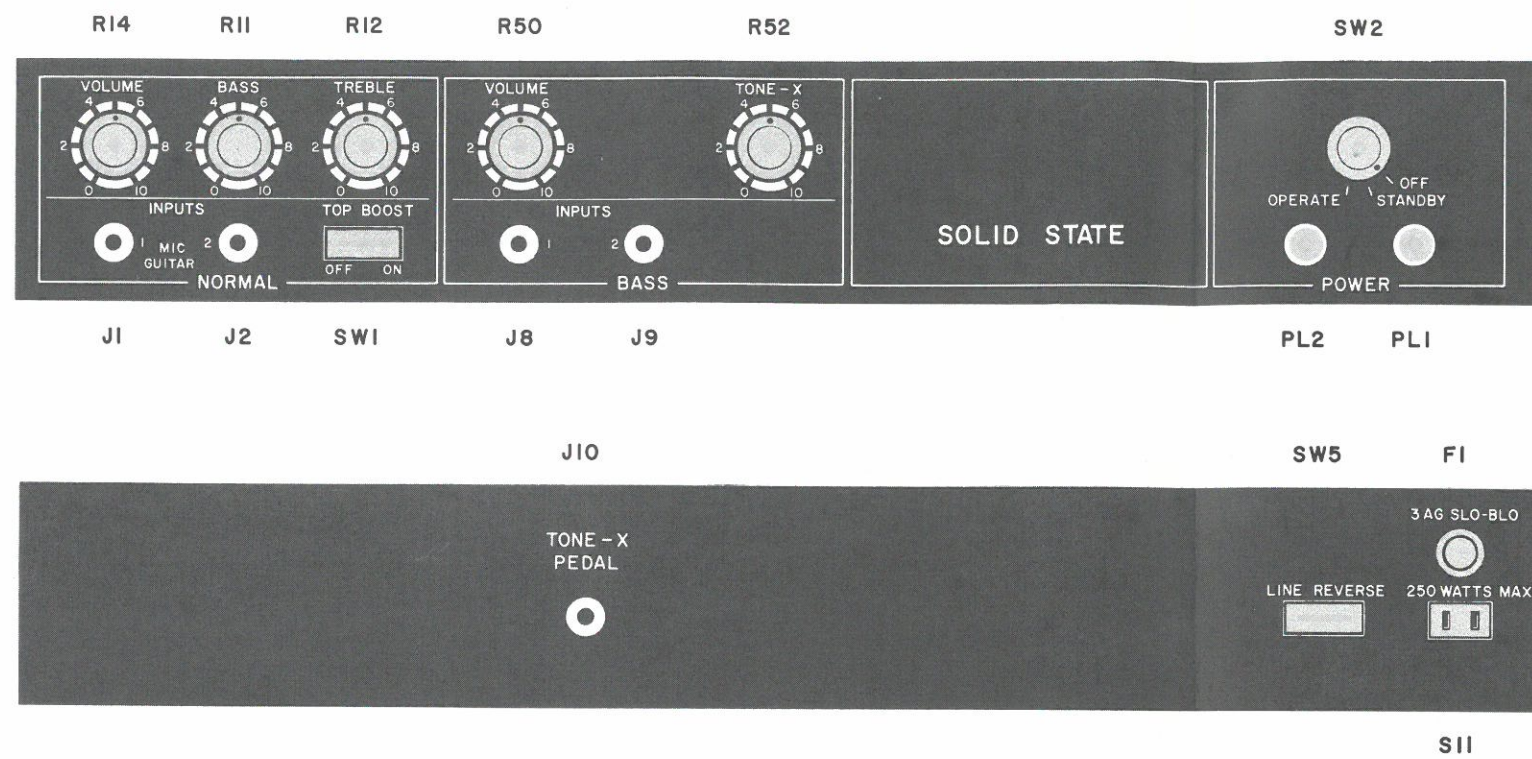

ESCUTCHEON

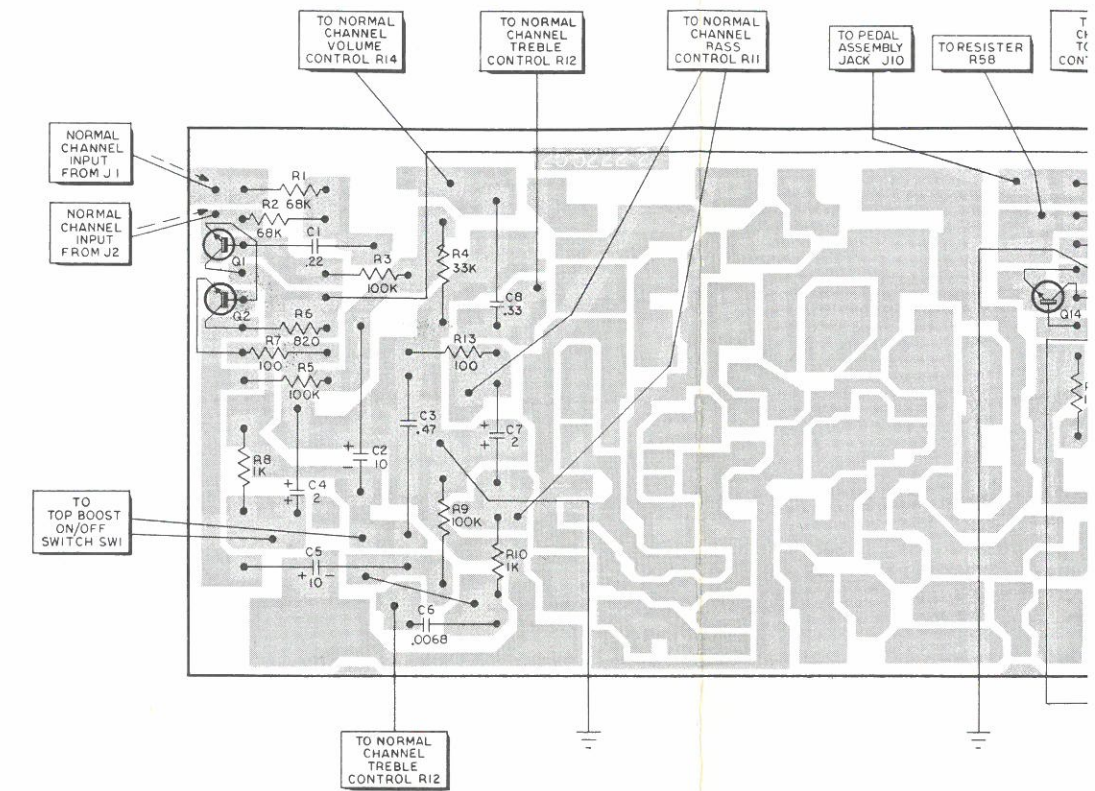

PREAMP P. C. BO
84
(SHOWN

TRANSISTOR INFORMATION

