

AUSTIN™ 400

BD.# 98650130 (2/4/83)

- NOTES**
 ALL RESISTORS 1/4W UNLESS NOTED
 ALL RESISTORS IN OHMS UNLESS NOTED
 ALL CAPACITORS IN MFD UNLESS NOTED
 ALL DIODES IN 1N4148 UNLESS NOTED
 LAST REF DESIGNATORS USED:
 R171 C110 CR58 Q19 S8 F3 J7 U10
 VOLTAGES MAY VARY FROM UNIT TO UNIT

TRANSISTOR CROSS REFERENCE


5951 (FET)	—2N5951
6530	—2N3642
6533	—2N3638
3904	—2N3904
5351	—SJE5919
5352	—SJE5920
5630	—2N6630,SJ6537
J111 (FET)	—(SPECIAL APPLICATION)

PEAVEY ELECTRONICS CORP.
 MERIDIAN, MS.
 DRAWN BY R.S. DATE 5/19/83
 C.E. CK. R.S.
 APPR. BY J.C.

P/N 81501015

BUILT UNDER U.S. PATENT NOS.
 4,318,053 AND 4,405,832

COPYRIGHT 1983 PEAVEY ELECTRONICS CORP. PRINTED IN U.S.A.

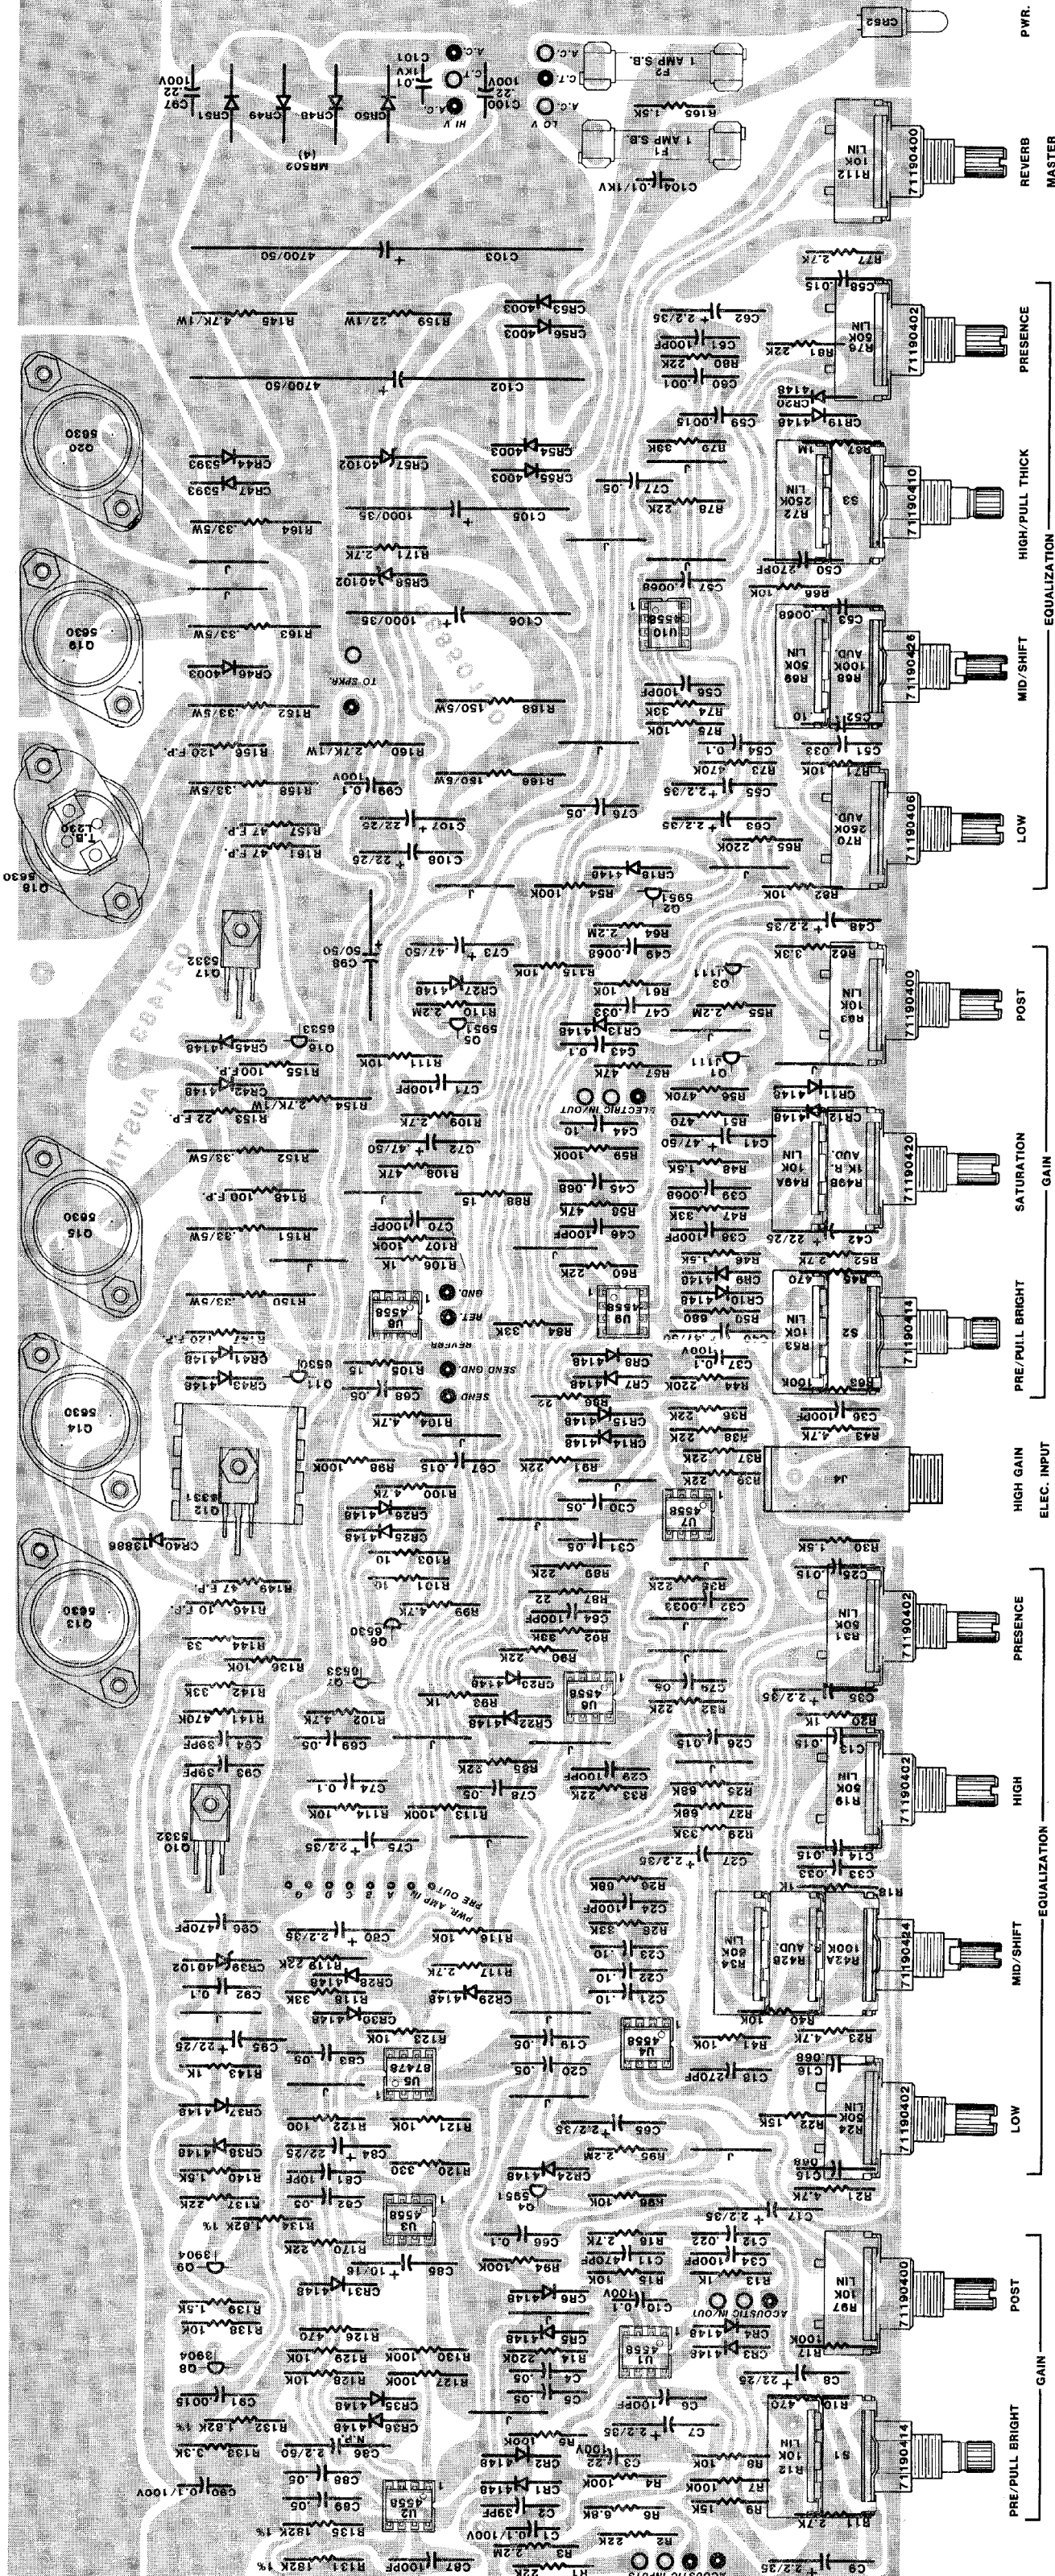

AUSTIN 400

PRE/PULL BRIGHT
 HIGH
 MID/SHIFT
 LOW
 SATURATION
 POST
 ELEC. INPUT
 HIGH GAIN
 PRE/PULL BRIGHT
 PRESENCE
 REVERB
 MASTER

Q13 5630
 Q14 5630
 Q15 5630
 Q16 5630
 Q17 5630
 Q18 5630
 Q19 5630