

# FUSES & CIRCUIT BREAKERS

1988 Jeep Cherokee


Fuses & Circuit Breakers  
1984-88 AMC/Jeep

Jeep; Cherokee, Wagoneer

## IDENTIFICATION

### FUSES & CIRCUIT BREAKERS

Fuse panel is located at the lower left side of dash on most models.

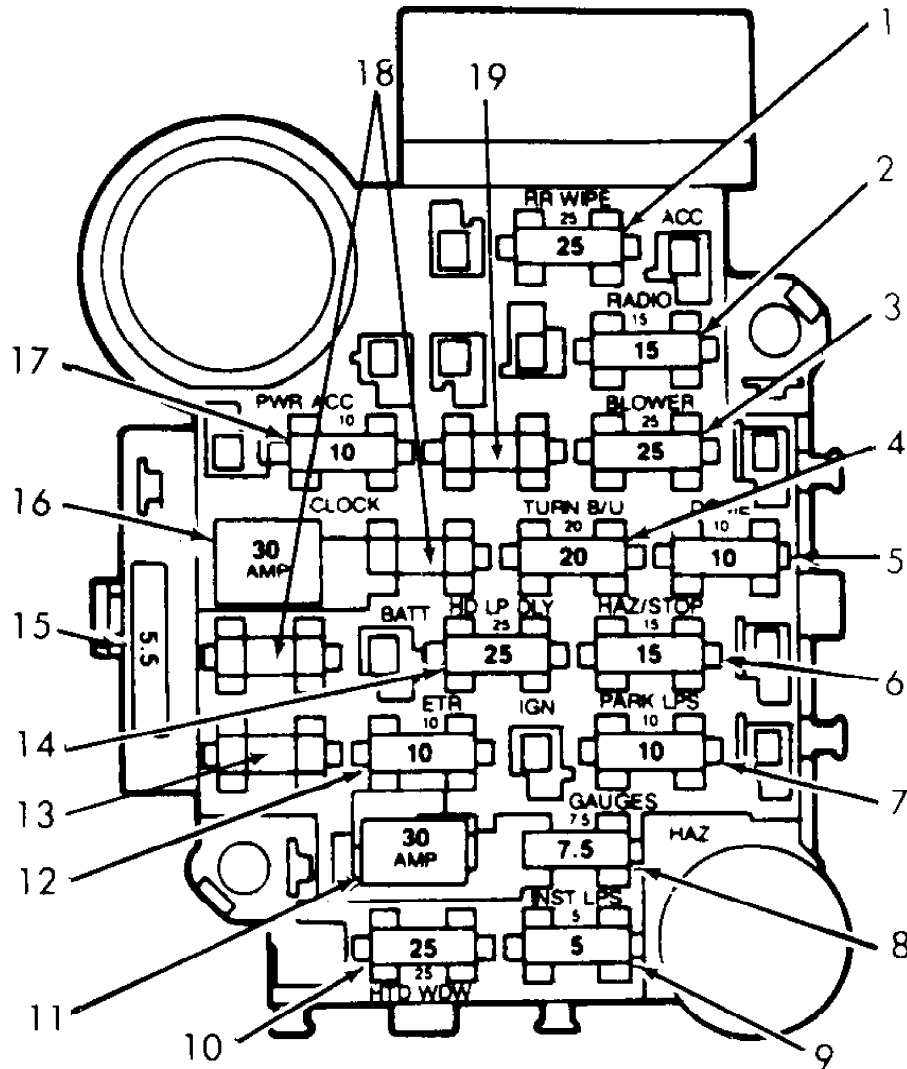

93C44570

Fig. 1: Fuse Panel Identification  
Courtesy of American Motors Corp.

### FUSE & CIRCUIT BREAKER IDENTIFICATION

1 - 25 Amp  
Rear Washer/Wiper.

2 - 15 Amp  
Radio, Cigarette Lighter.

3 - 25 Amp  
Blower Motor.

4 - 20 Amp  
Turn Signal, Back-Up Lights, Rear Window Defogger Relay.

5 - 10 Amp  
Dome Light, Courtesy Lights, Glove Box Light, Cargo Light,  
Radio Memory, Power Mirrors, Teltak Connector.

6 - 15 Amp  
Hazard Warning System, Stoplights.

7 - 10 Amp  
Parking Lights, Headlight Warning Chime/Buzzer, Instrument  
Panel Light Dimmer.

8 - 7.5 Amp  
Gauges, Instrument Cluster, Seat Belt Warning, Headlight  
Delay, Chime Module, Overhead Console.

9 - 5 Amp  
Instrument Panel Illumination.

10 - 25 Amp  
Rear Window Defogger.

11 - 30 Amp (Circuit Breaker)  
Power Door Locks, Power Seats, Trailer Towing Wiring Harness.

12 - 10 Amp  
ETR Radio, Power Antenna.

13 - Not Used (1984-87); 7.5 Amp (1988)  
Transmission Control Unit.

14 - 25 Amp  
Headlight Delay, Horns, Security Alarm.

15 - 5.5 Amp (Circuit Breaker)  
Front Wiper.

16 - 30 Amp (Circuit Breaker)  
Power Windows.

17 - 10 Amp  
Clock, Security Alarm (Ign).

## **CAUTIONS & WARNINGS**

### **REPLACING BLOWN FUSES**

Before replacing a blown fuse, remove ignition key, turn off all lights and accessories to avoid damaging the electrical system. Be sure to use fuse with the correct indicated amperage rating. The use of an incorrect amperage rating fuse may result in a dangerous

electrical system overload.

### **BATTERY WARNING**

**WARNING:** When battery is disconnected, vehicles equipped with computers may lose memory data. When battery power is restored, driveability problems may exist on some vehicles. These vehicles may require a relearn procedure. See the COMPUTER RELEARN PROCEDURES article in GENERAL INFORMATION section.

### **ELECTROSTATIC DISCHARGE SENSITIVE (ESD) PARTS**

**WARNING:** Many solid state electrical components can be damaged by static electricity (ESD). Some will display a warning label, but many will not. Discharge personal static electricity by touching a metal ground point on the vehicle prior to servicing any ESD sensitive component.

### **HALOGEN BULBS**

Halogen bulbs contain pressurized gas which may explode if overheated. DO NOT touch glass portion of bulb with bare hands. Eye protection should be worn when handling or working around halogen bulbs.

### **RADIATOR CAP**

**CAUTION:** Always disconnect the fan motor when working near the radiator fan. The fan is temperature controlled and could start at any time even when the ignition key is in the OFF position. DO NOT loosen or remove radiator cap when cooling system is hot.