



TYPE TR-4654




1567

A

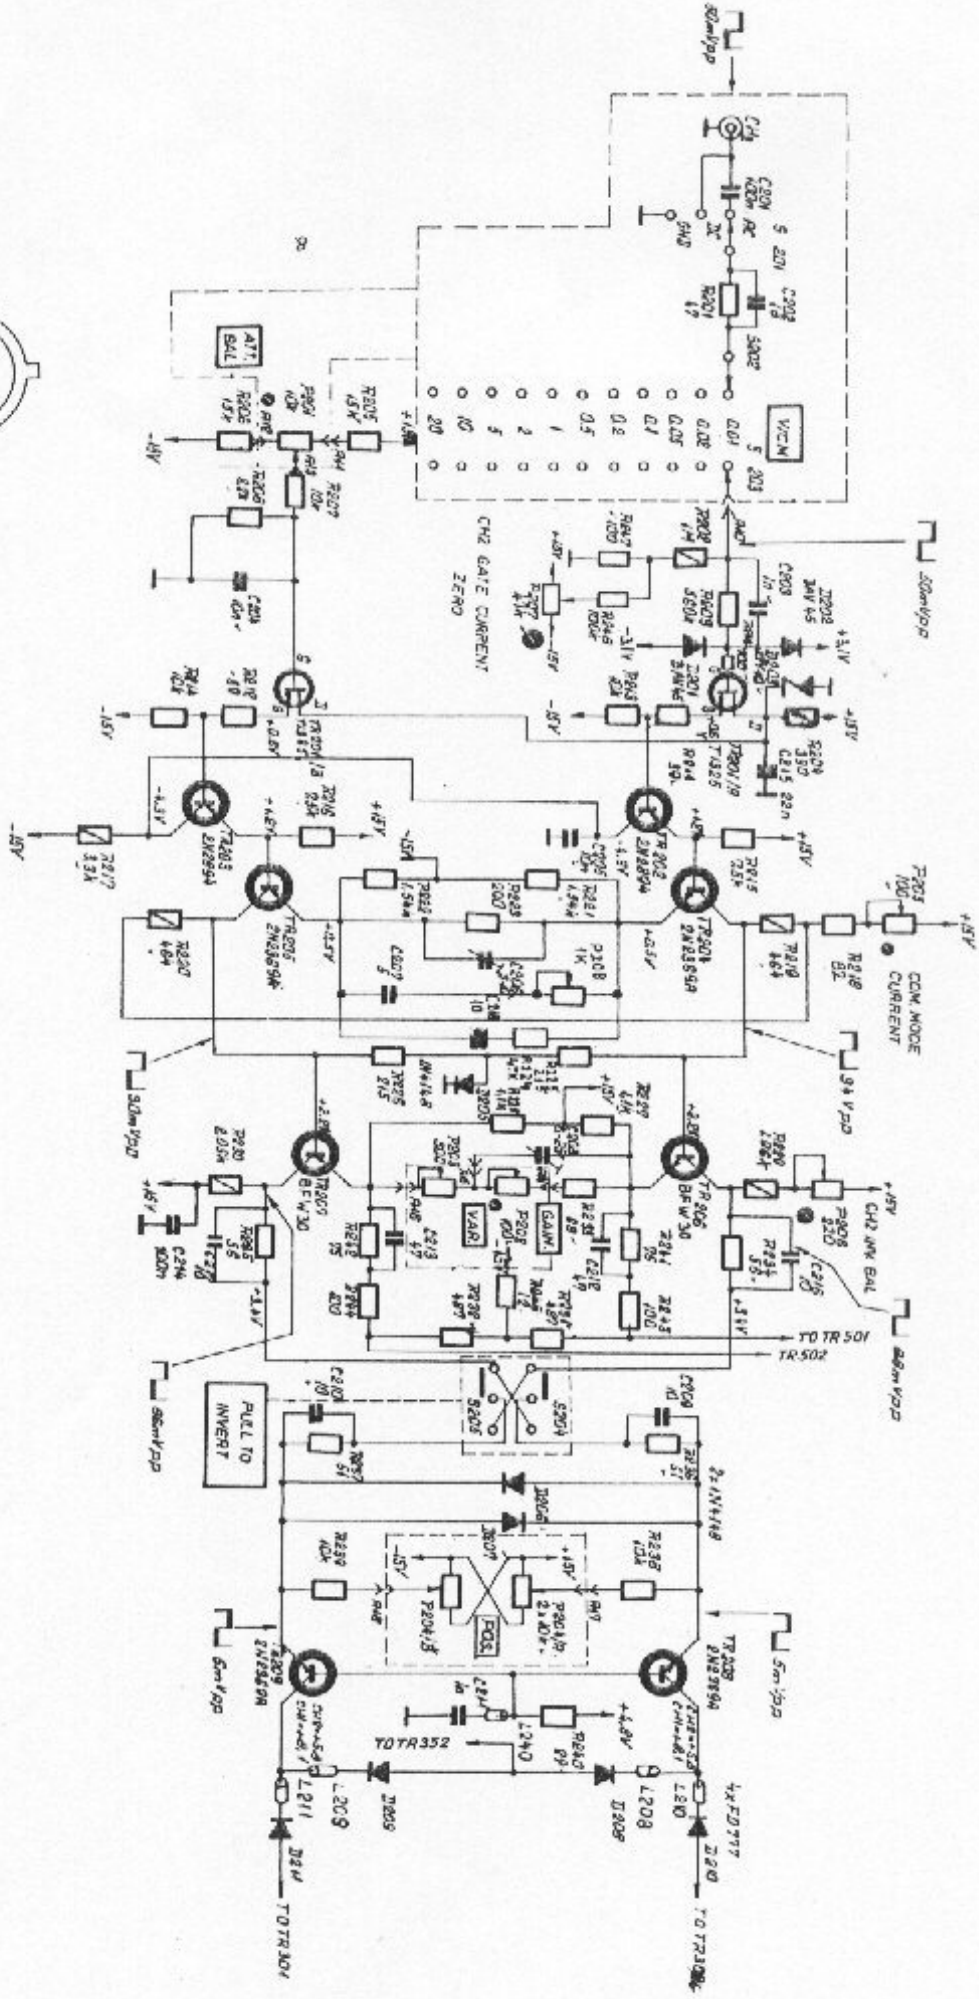



TIS 25
BOTTOM VIEW

CONNECT 1

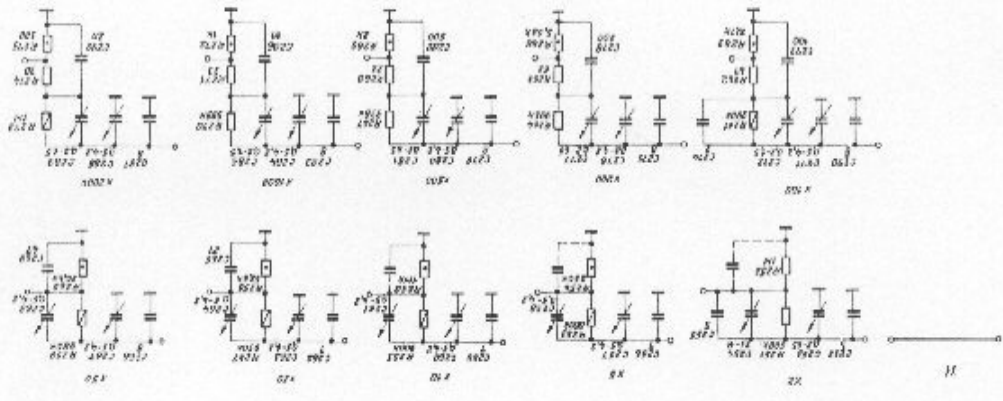


CONNECT 2


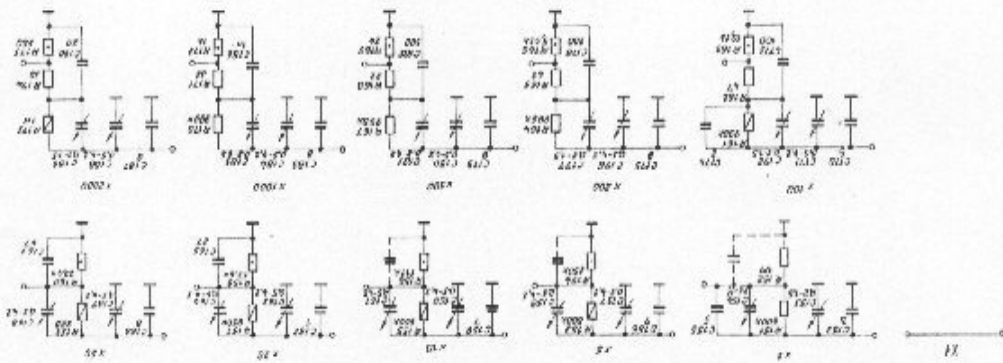


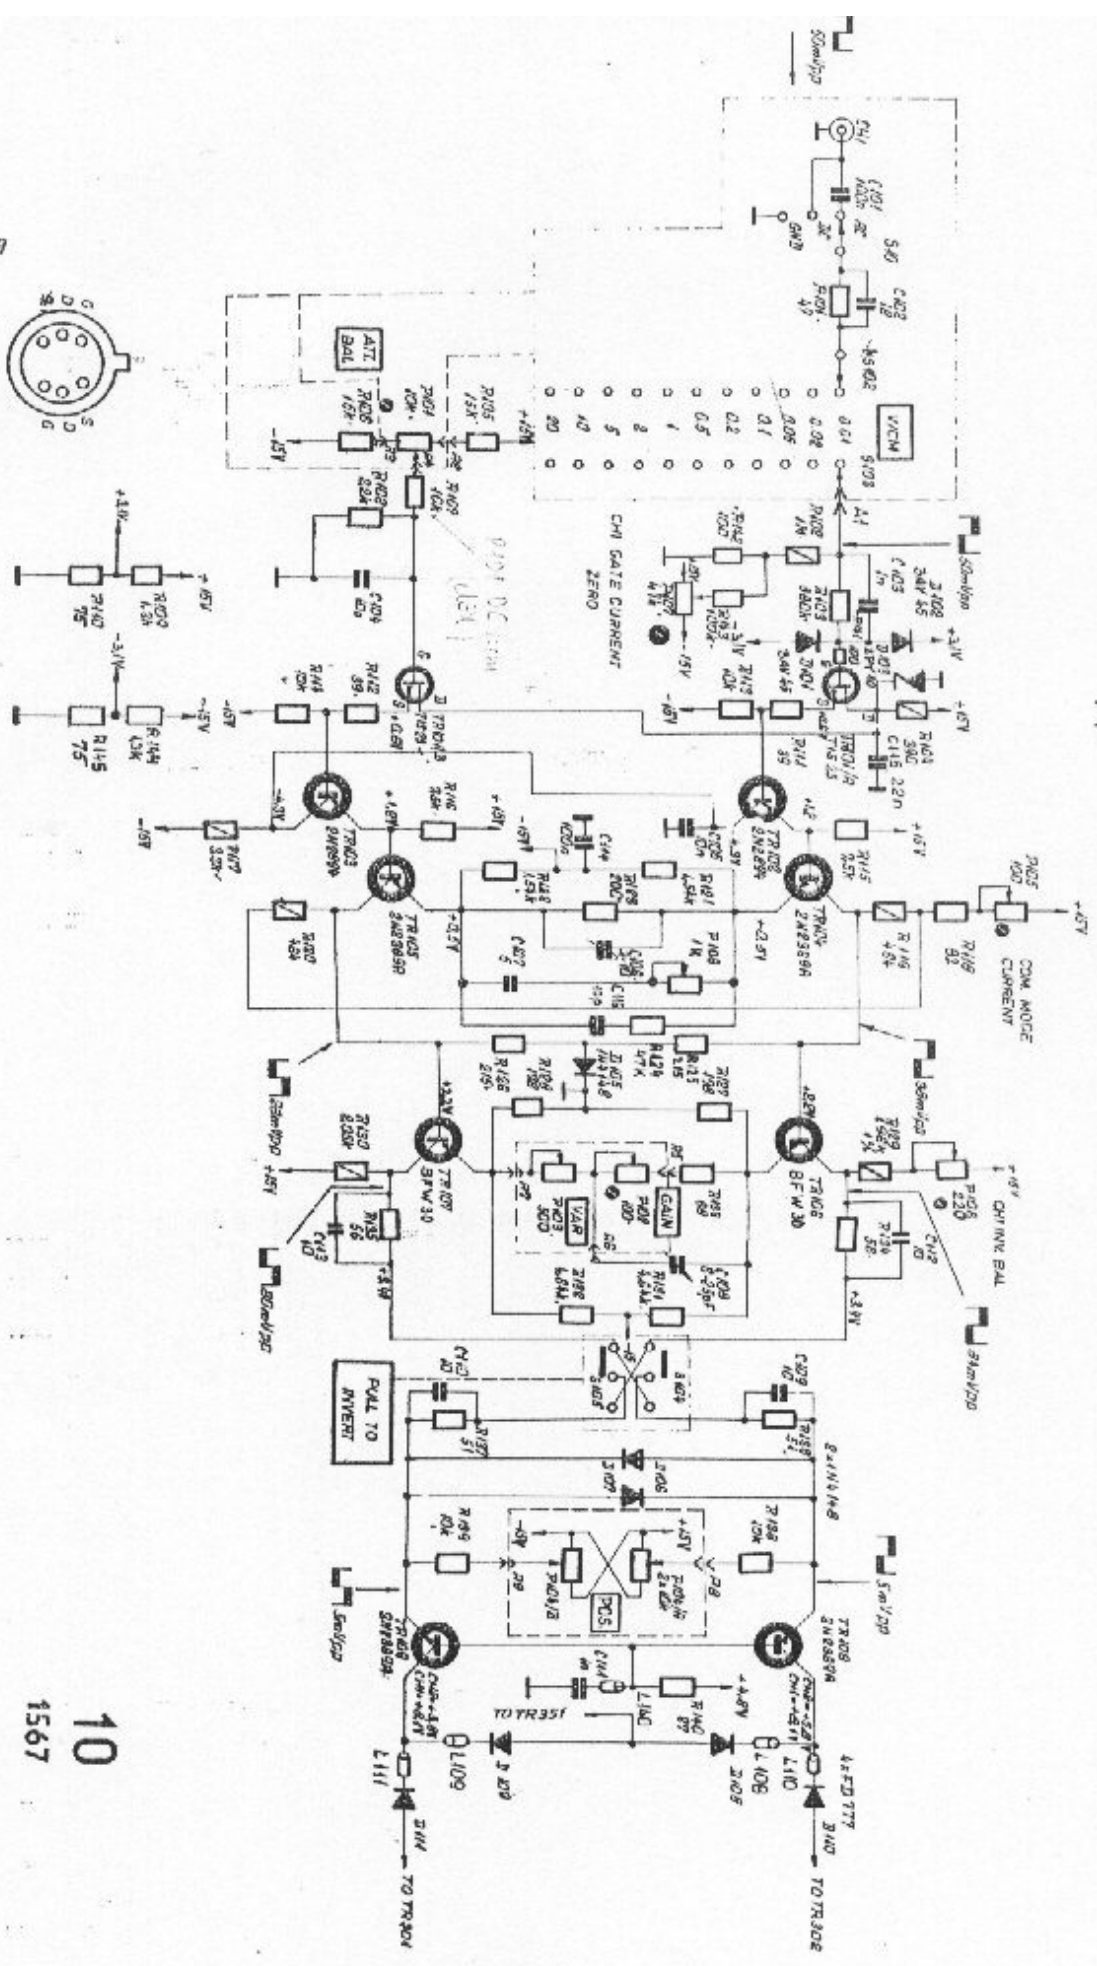


T/S 25
BOTTOM VIEW




10
1567

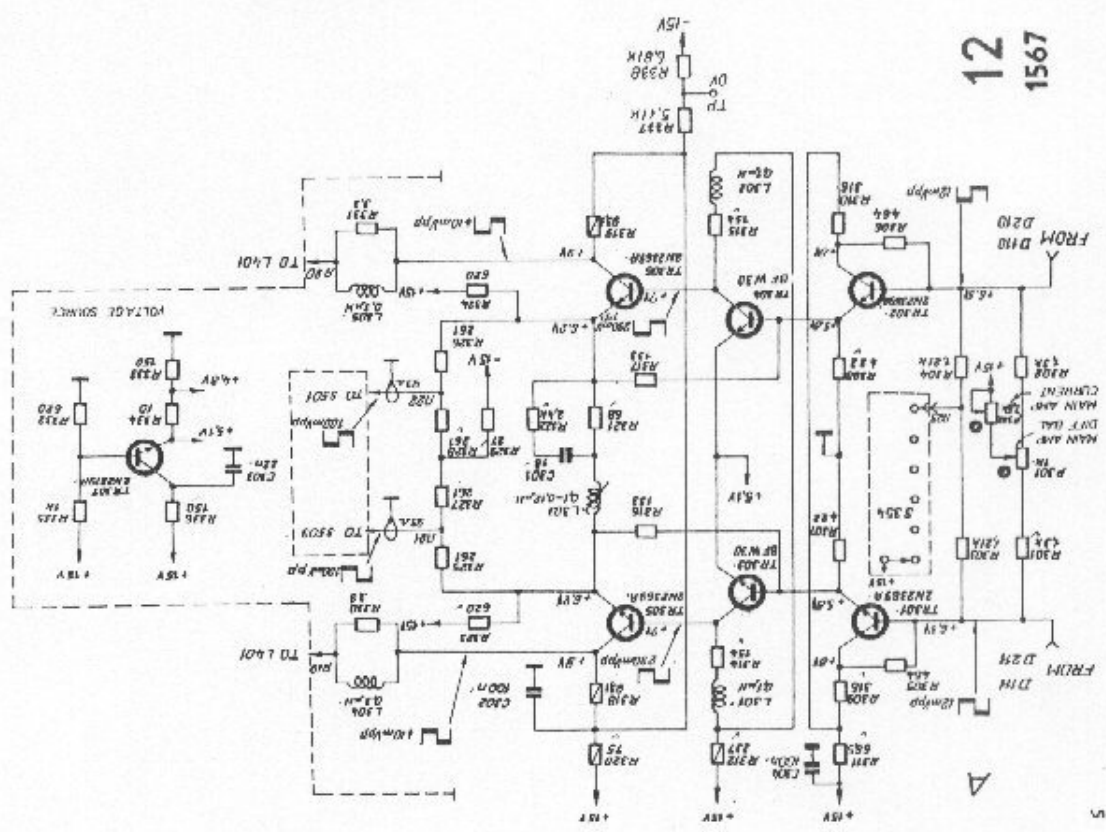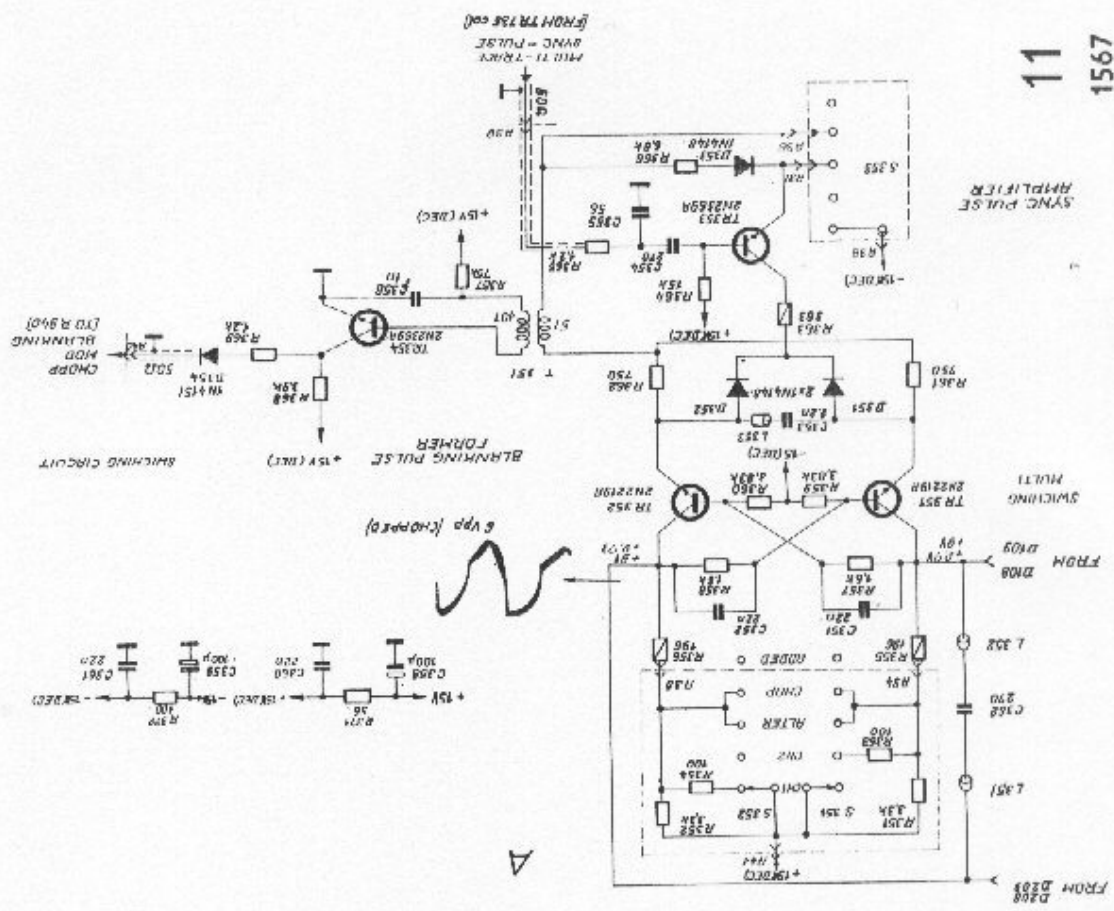

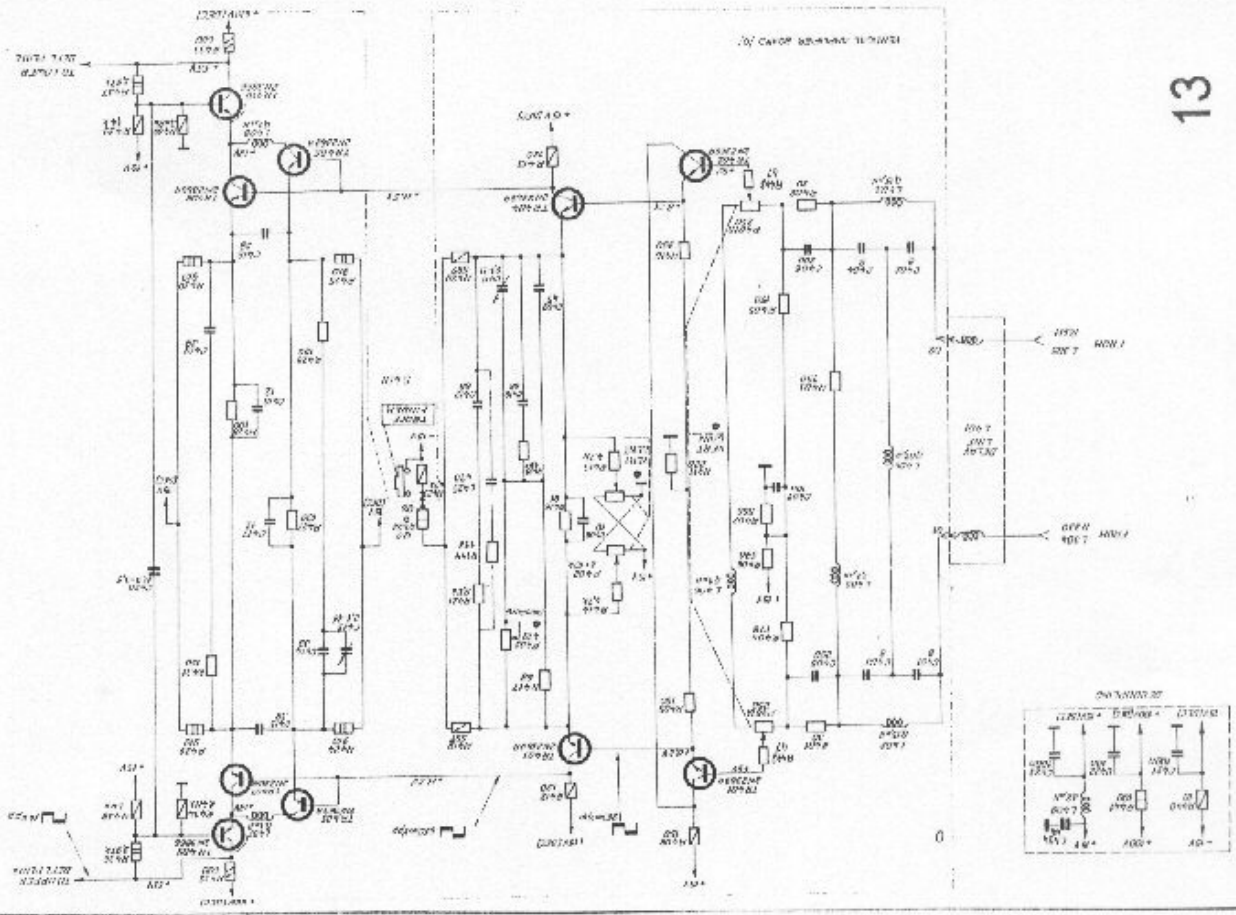




13
1567

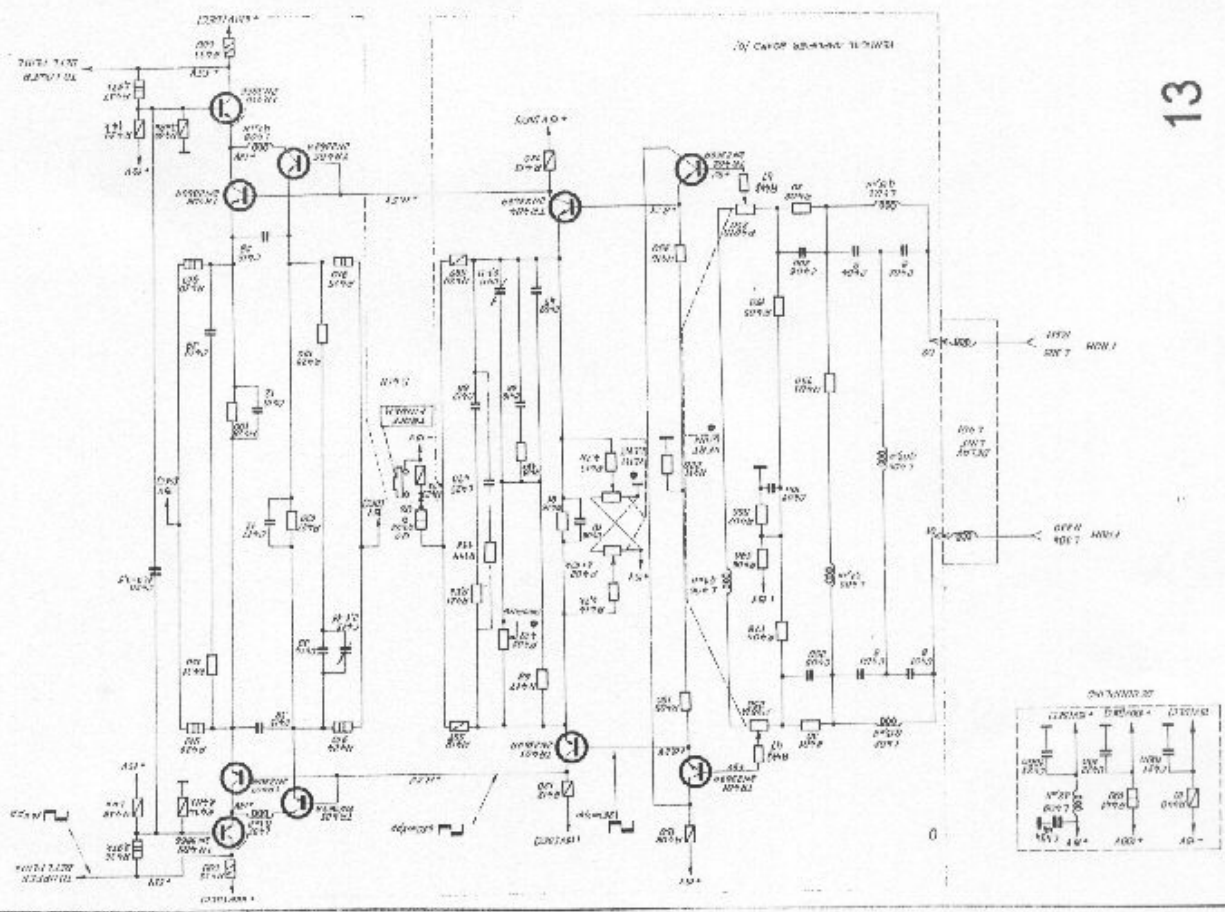



13
1567

A

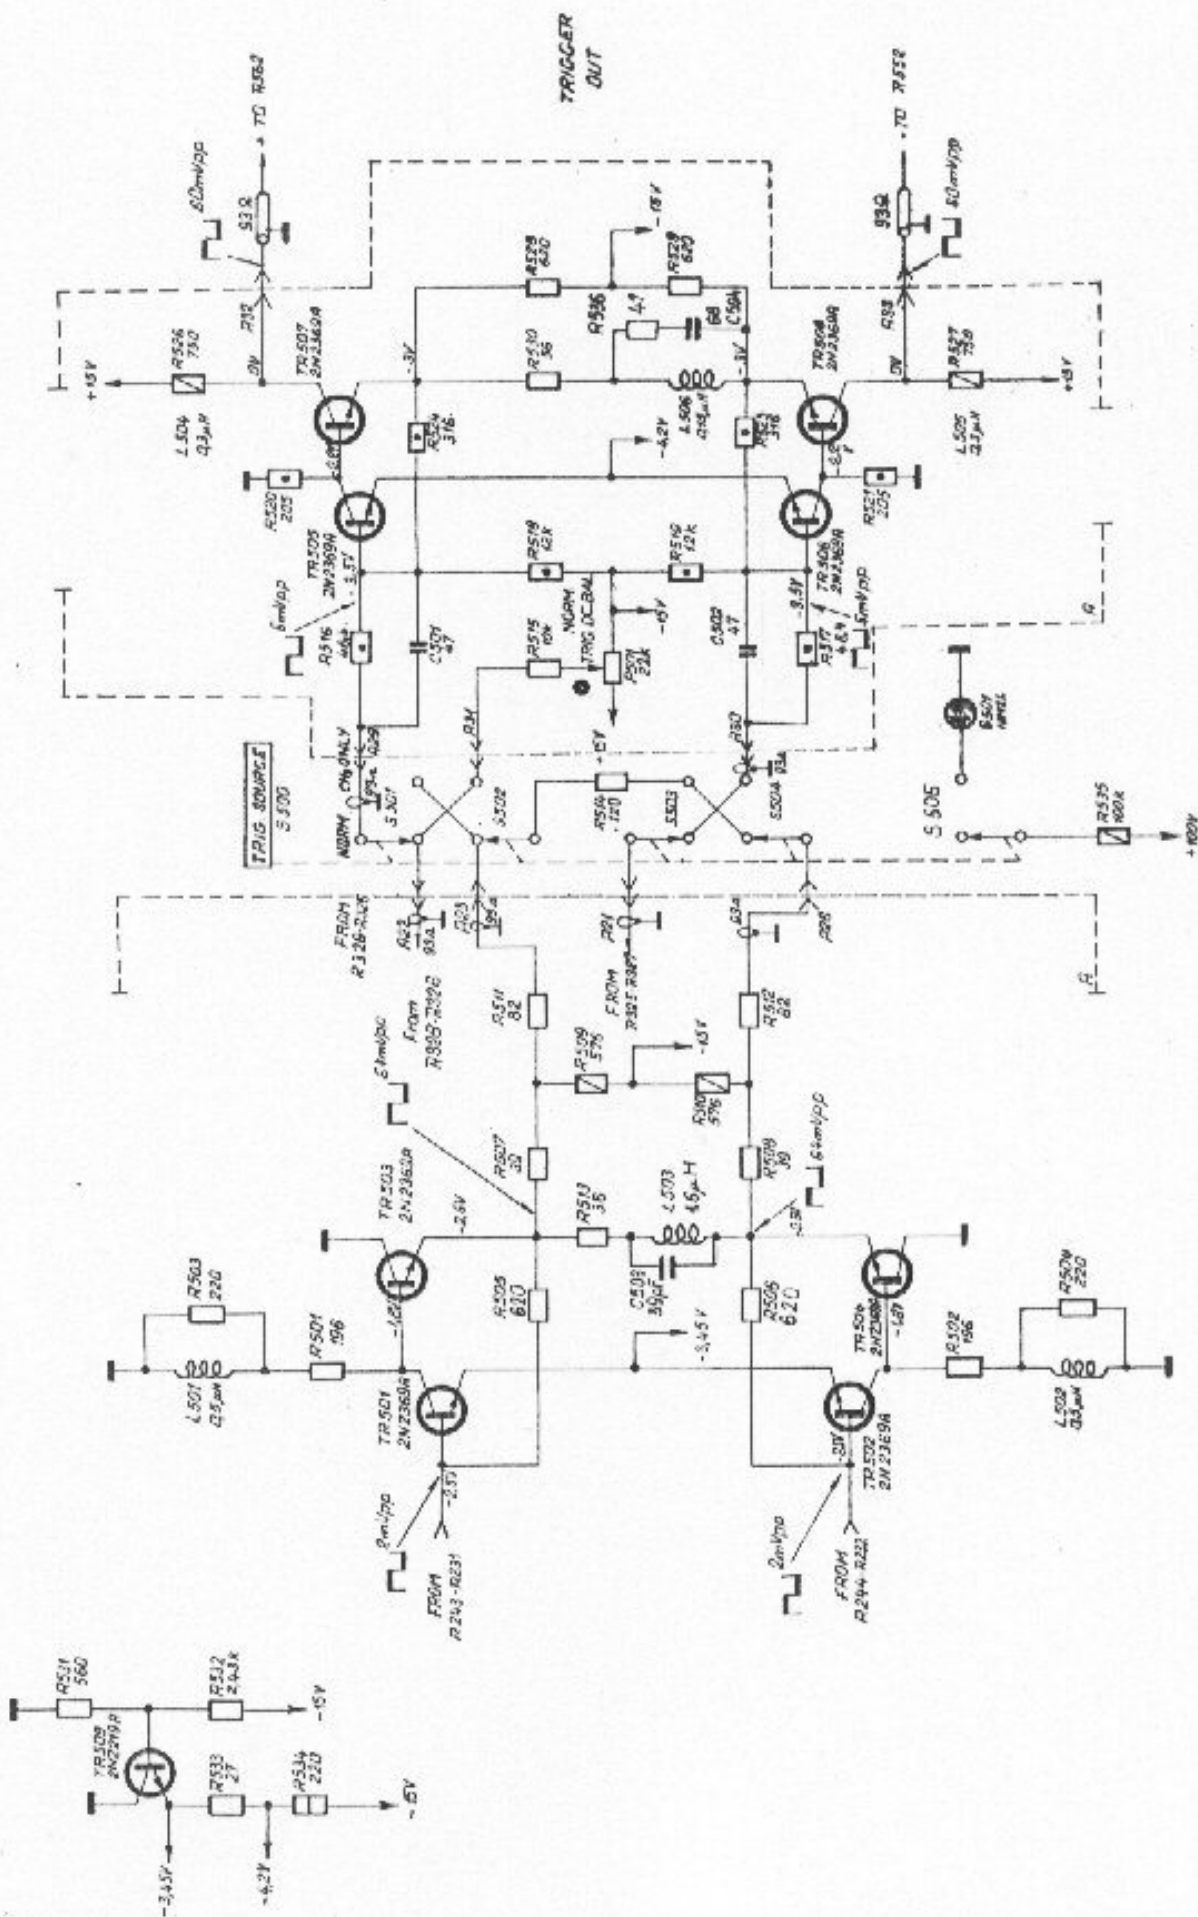


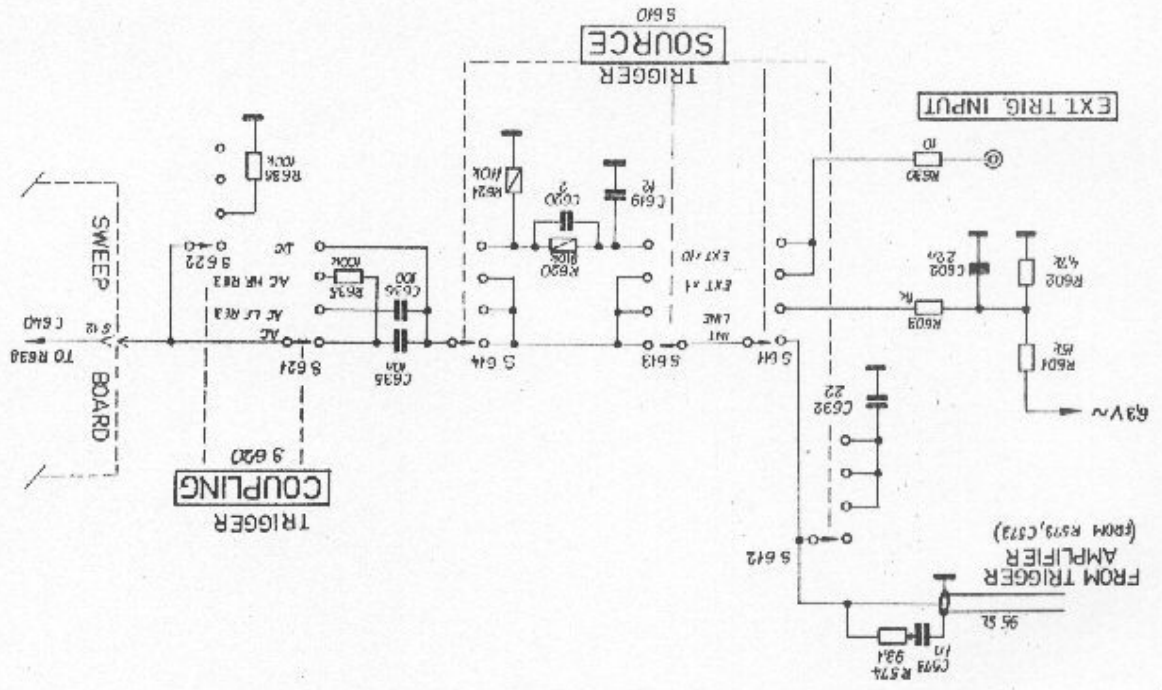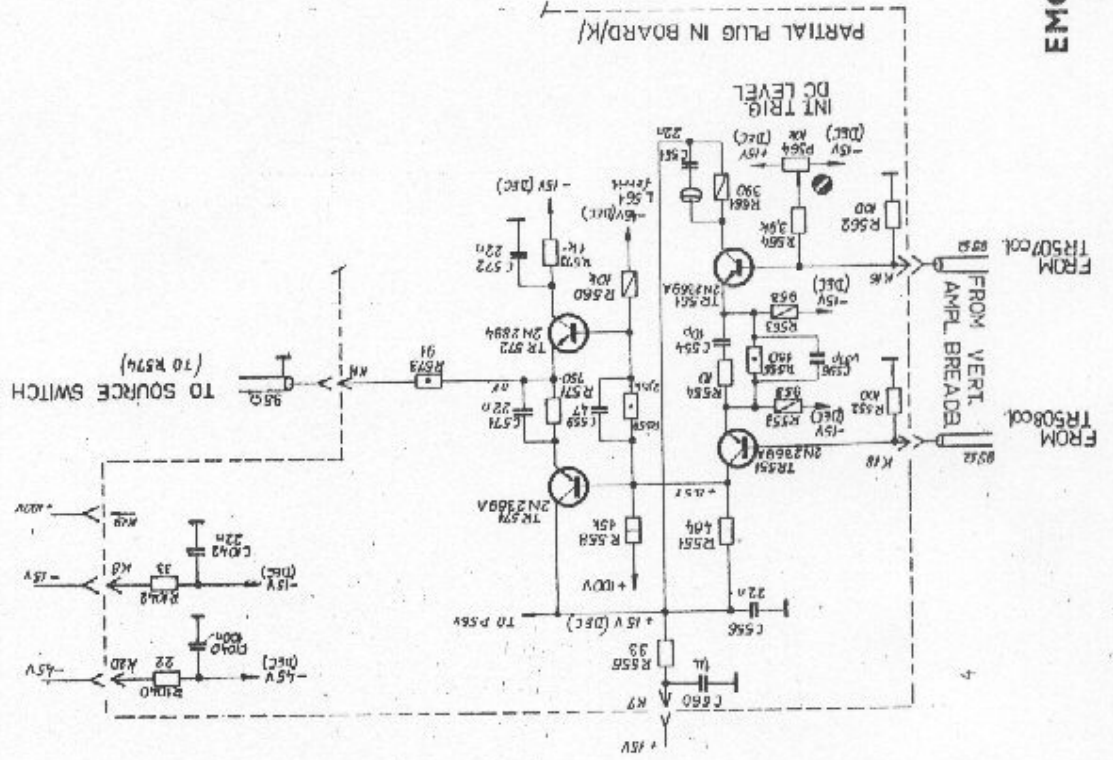

BF 245C


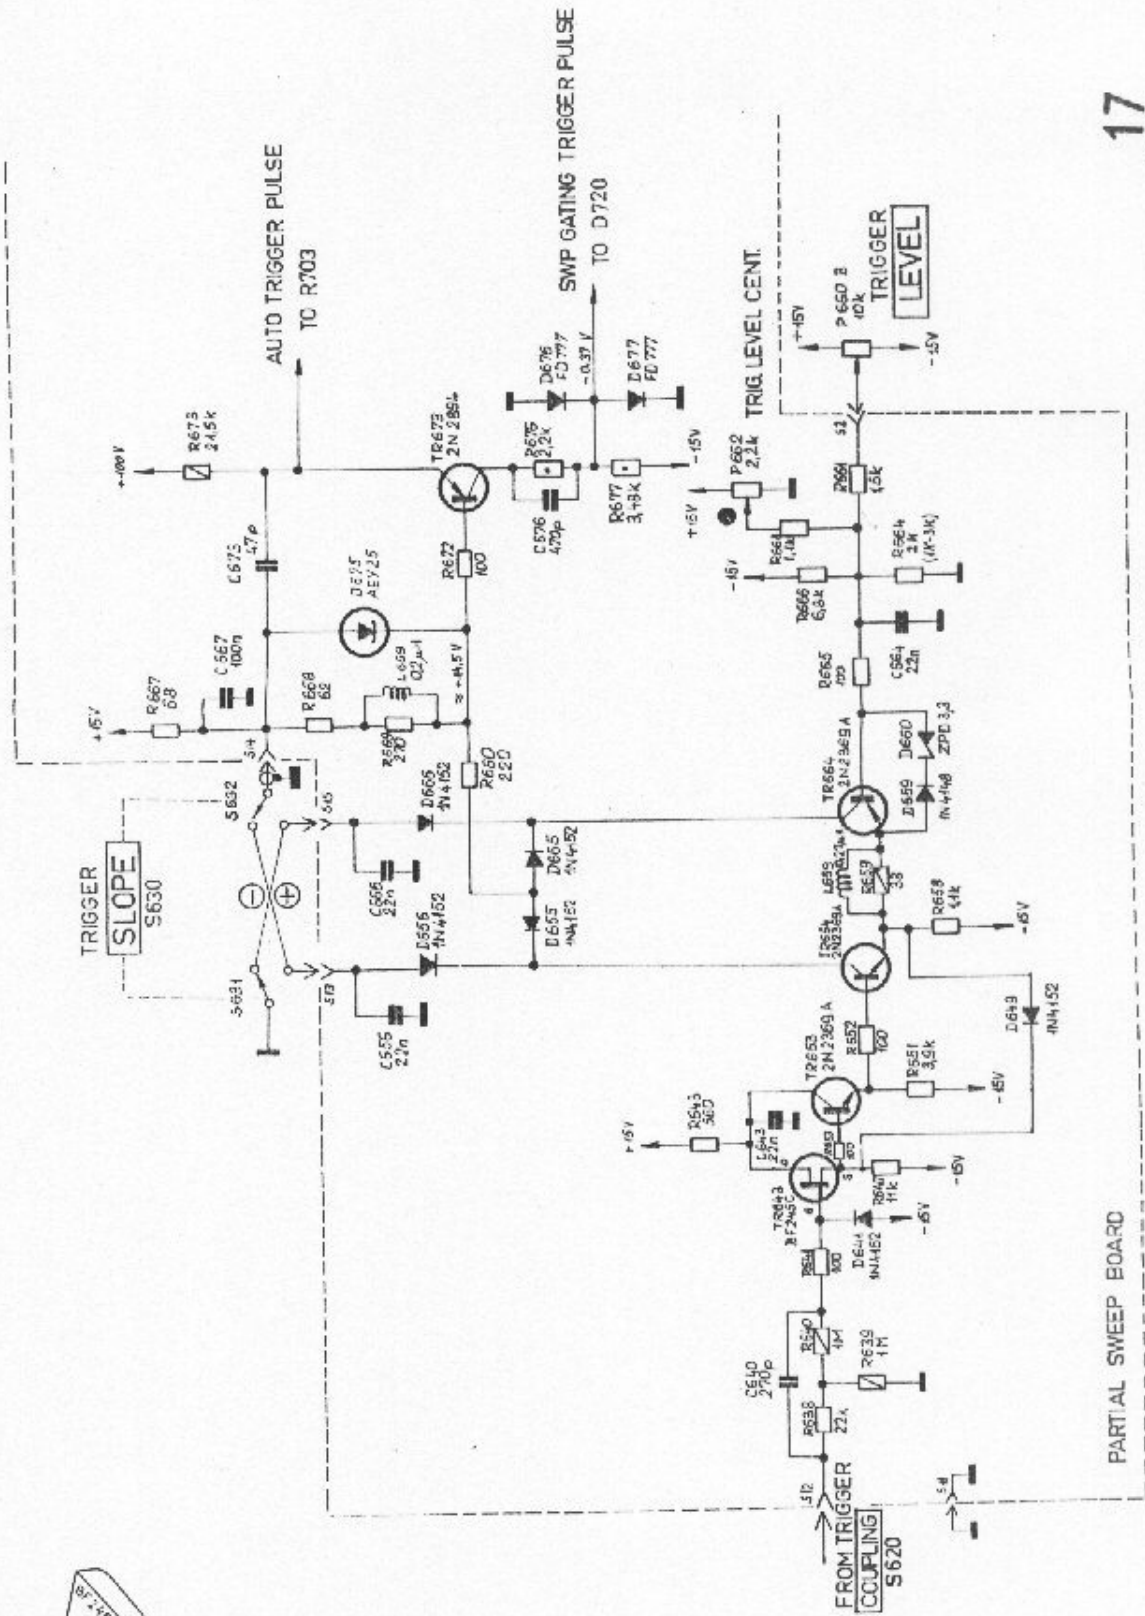




8F 245C

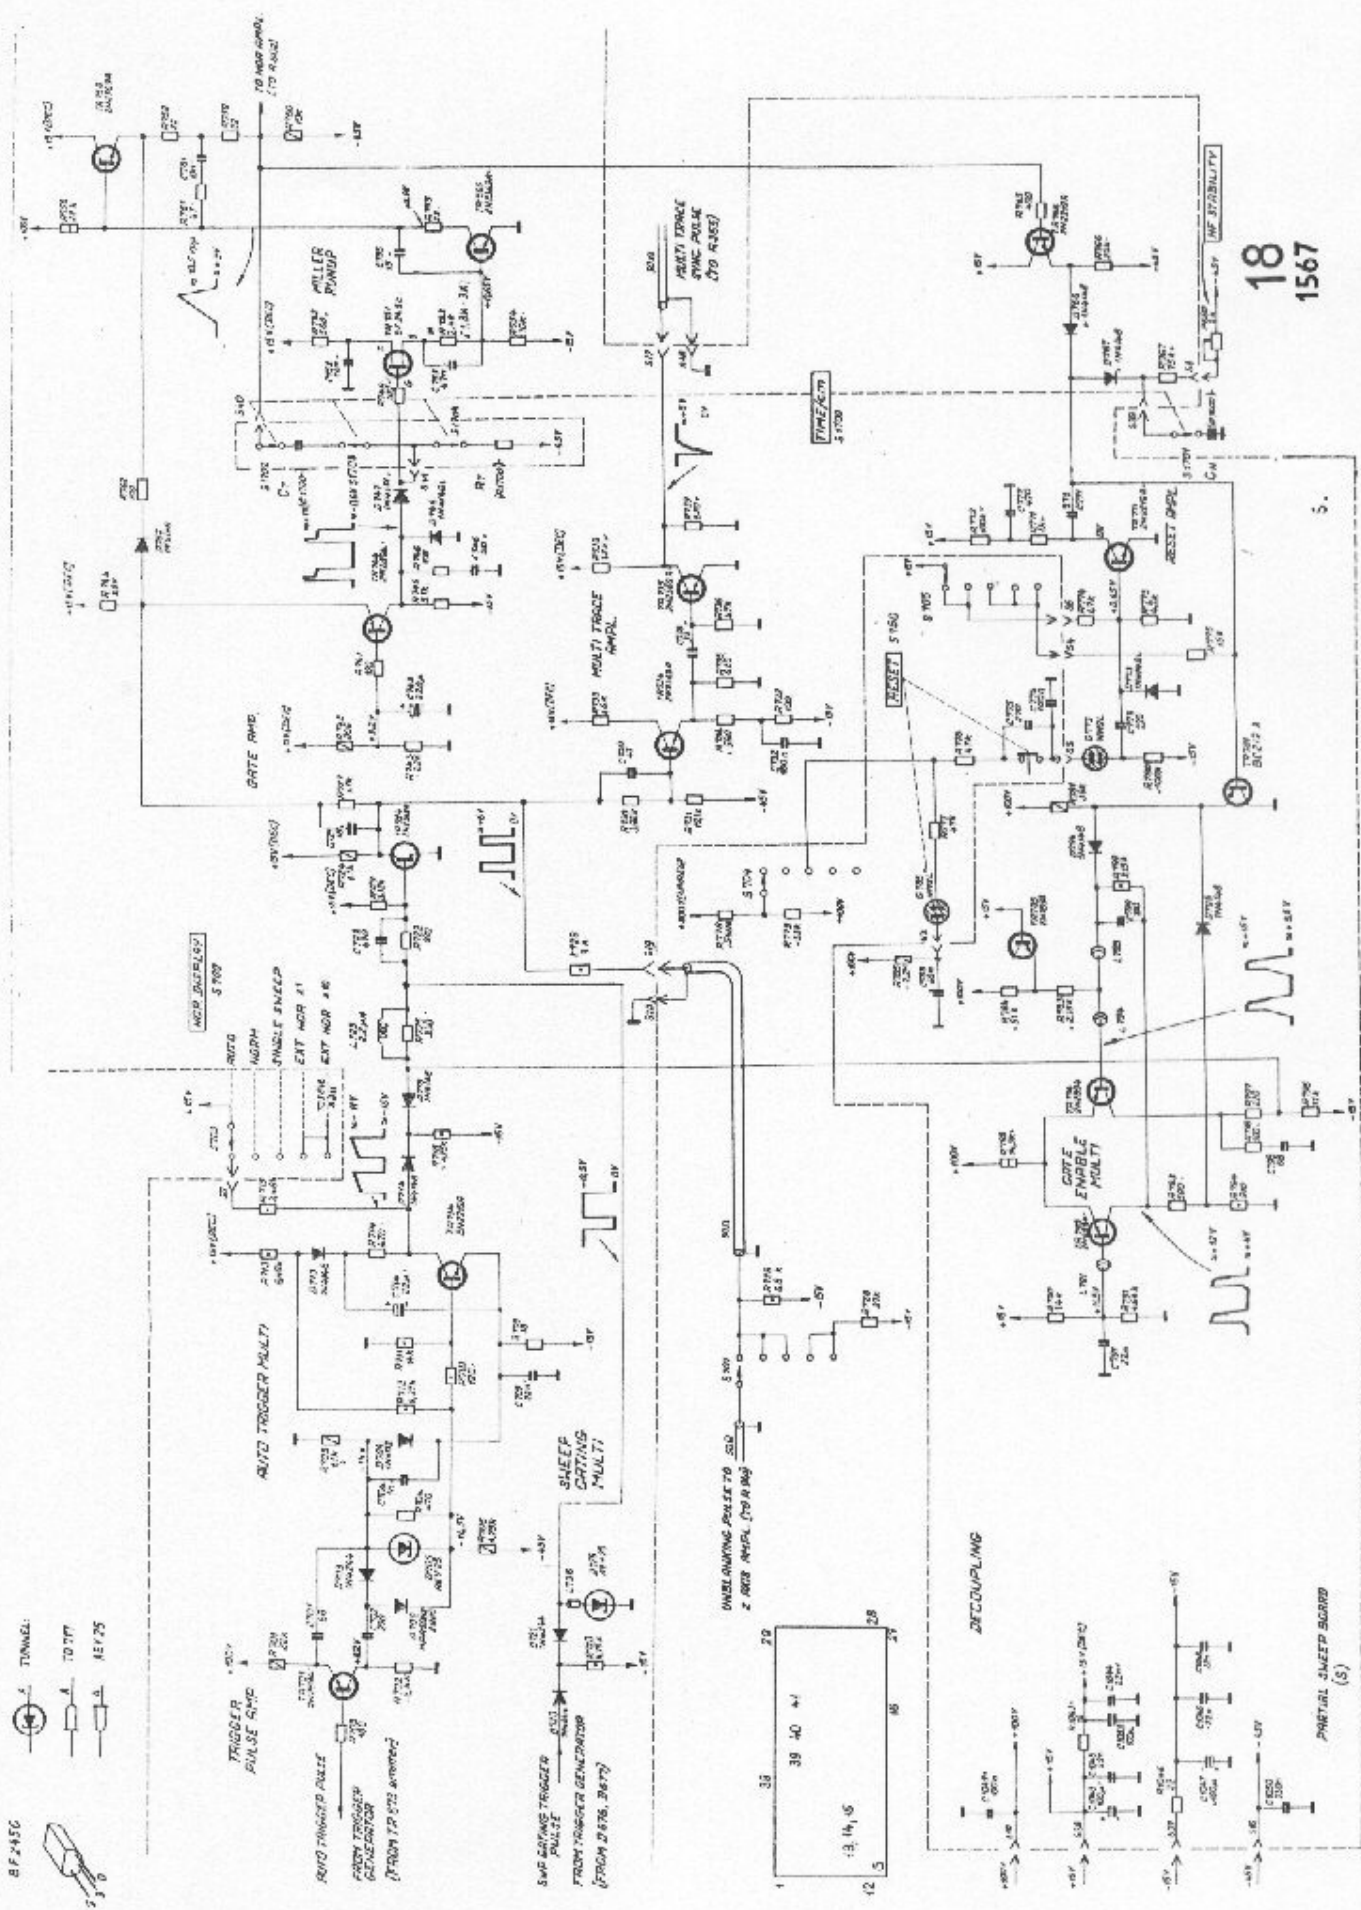



18
1567

5.

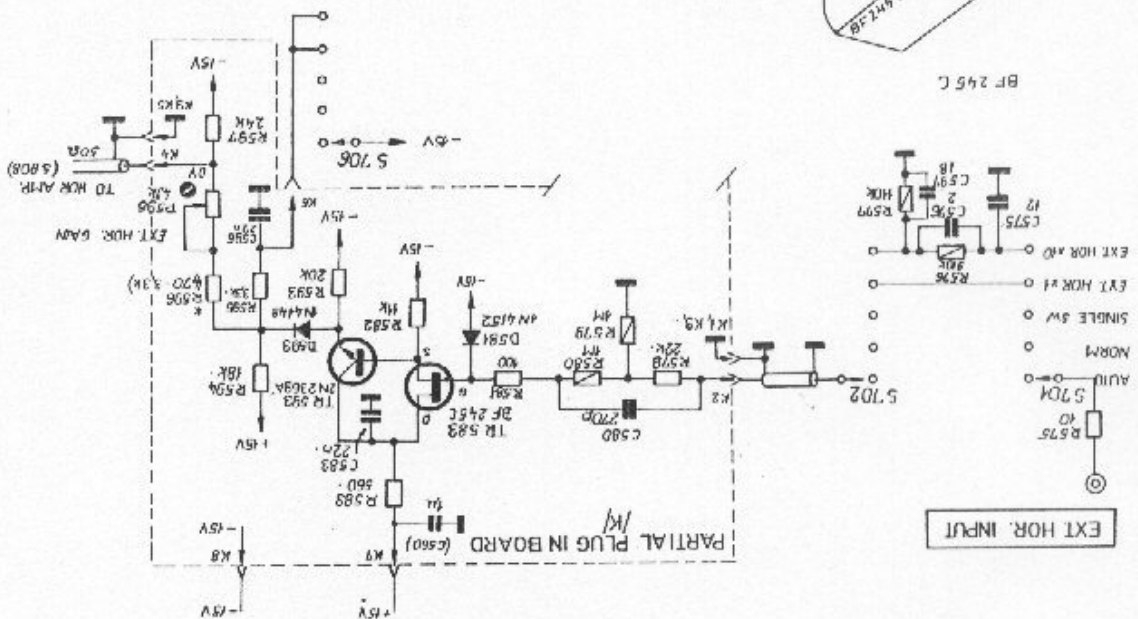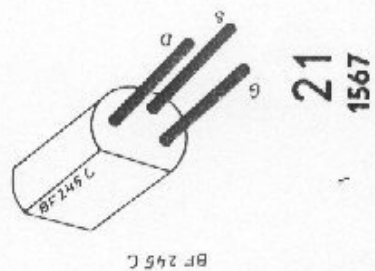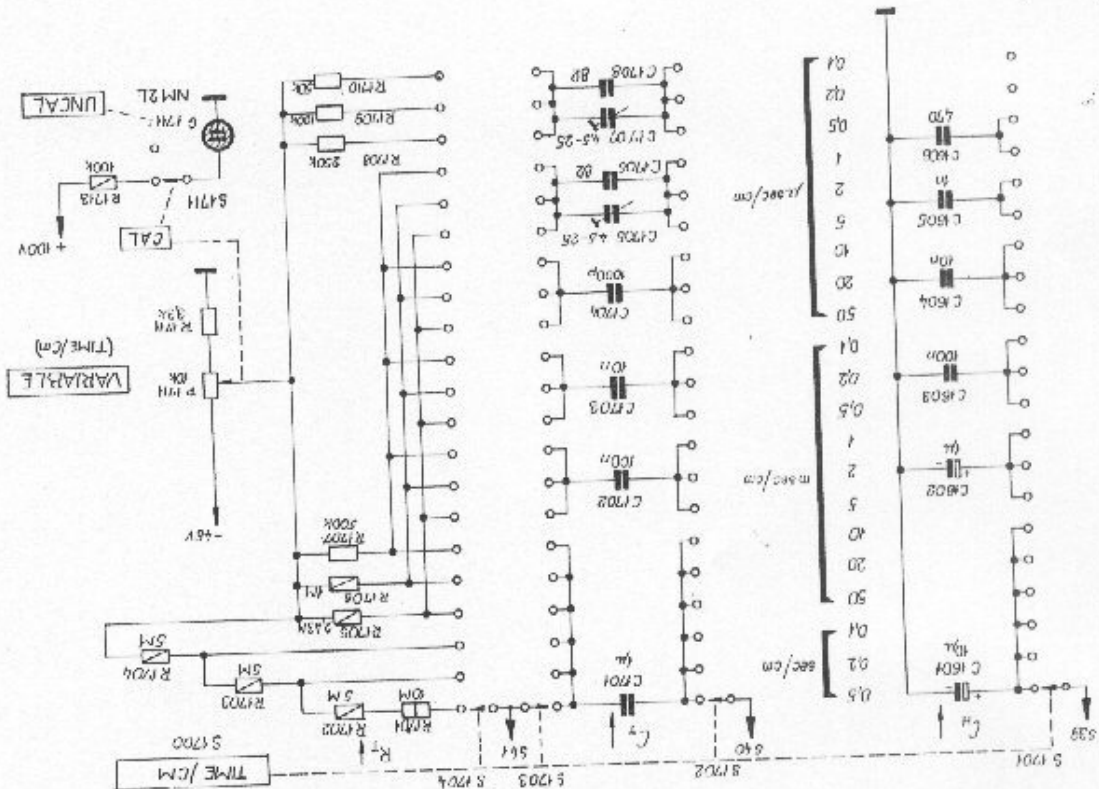

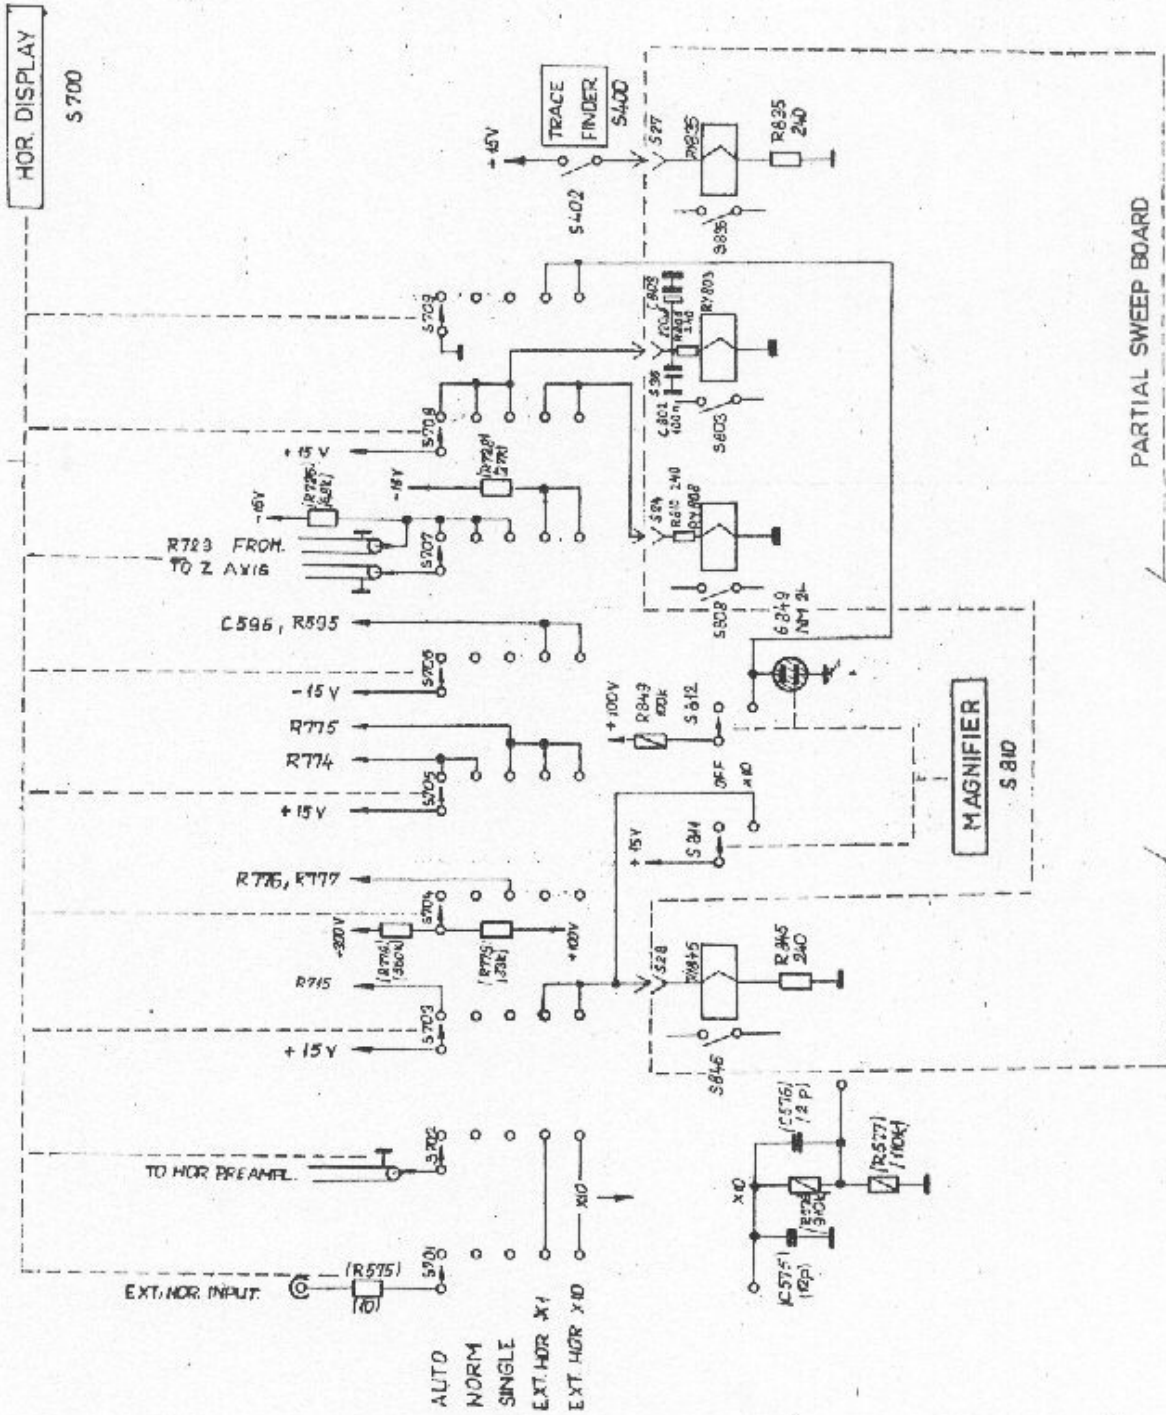

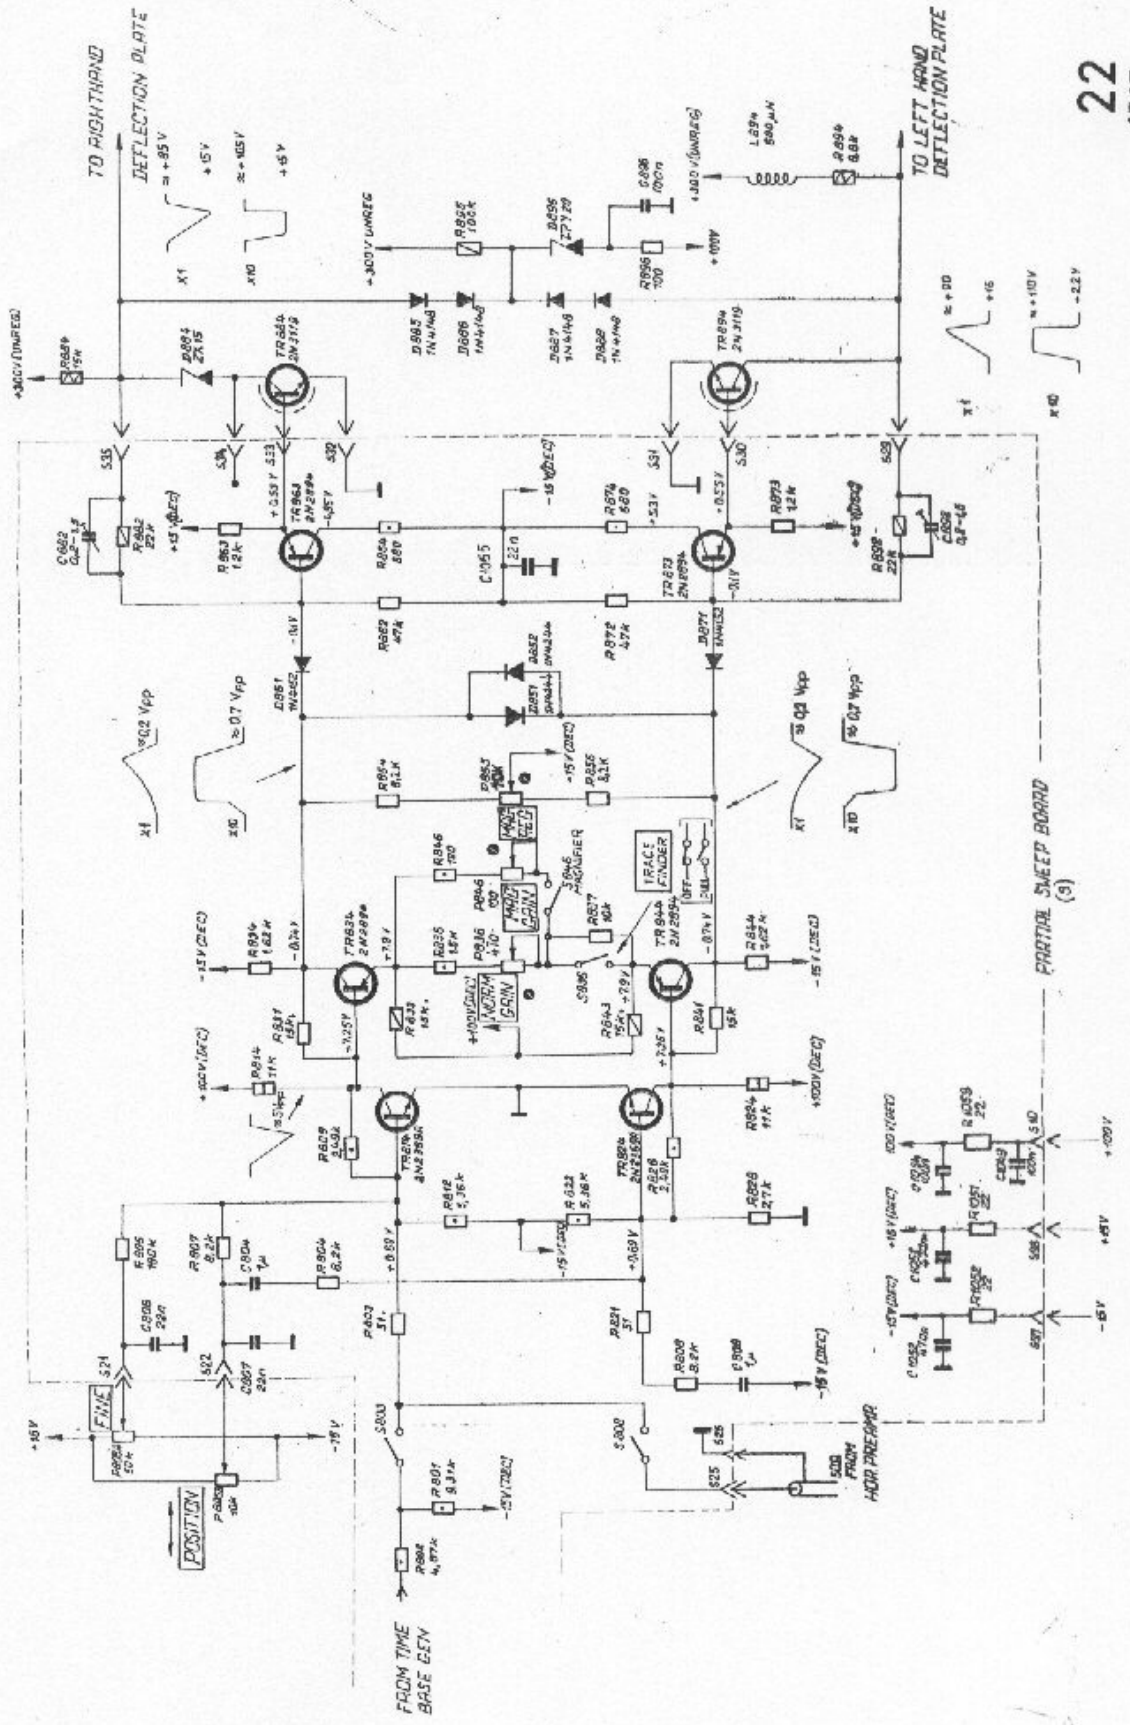

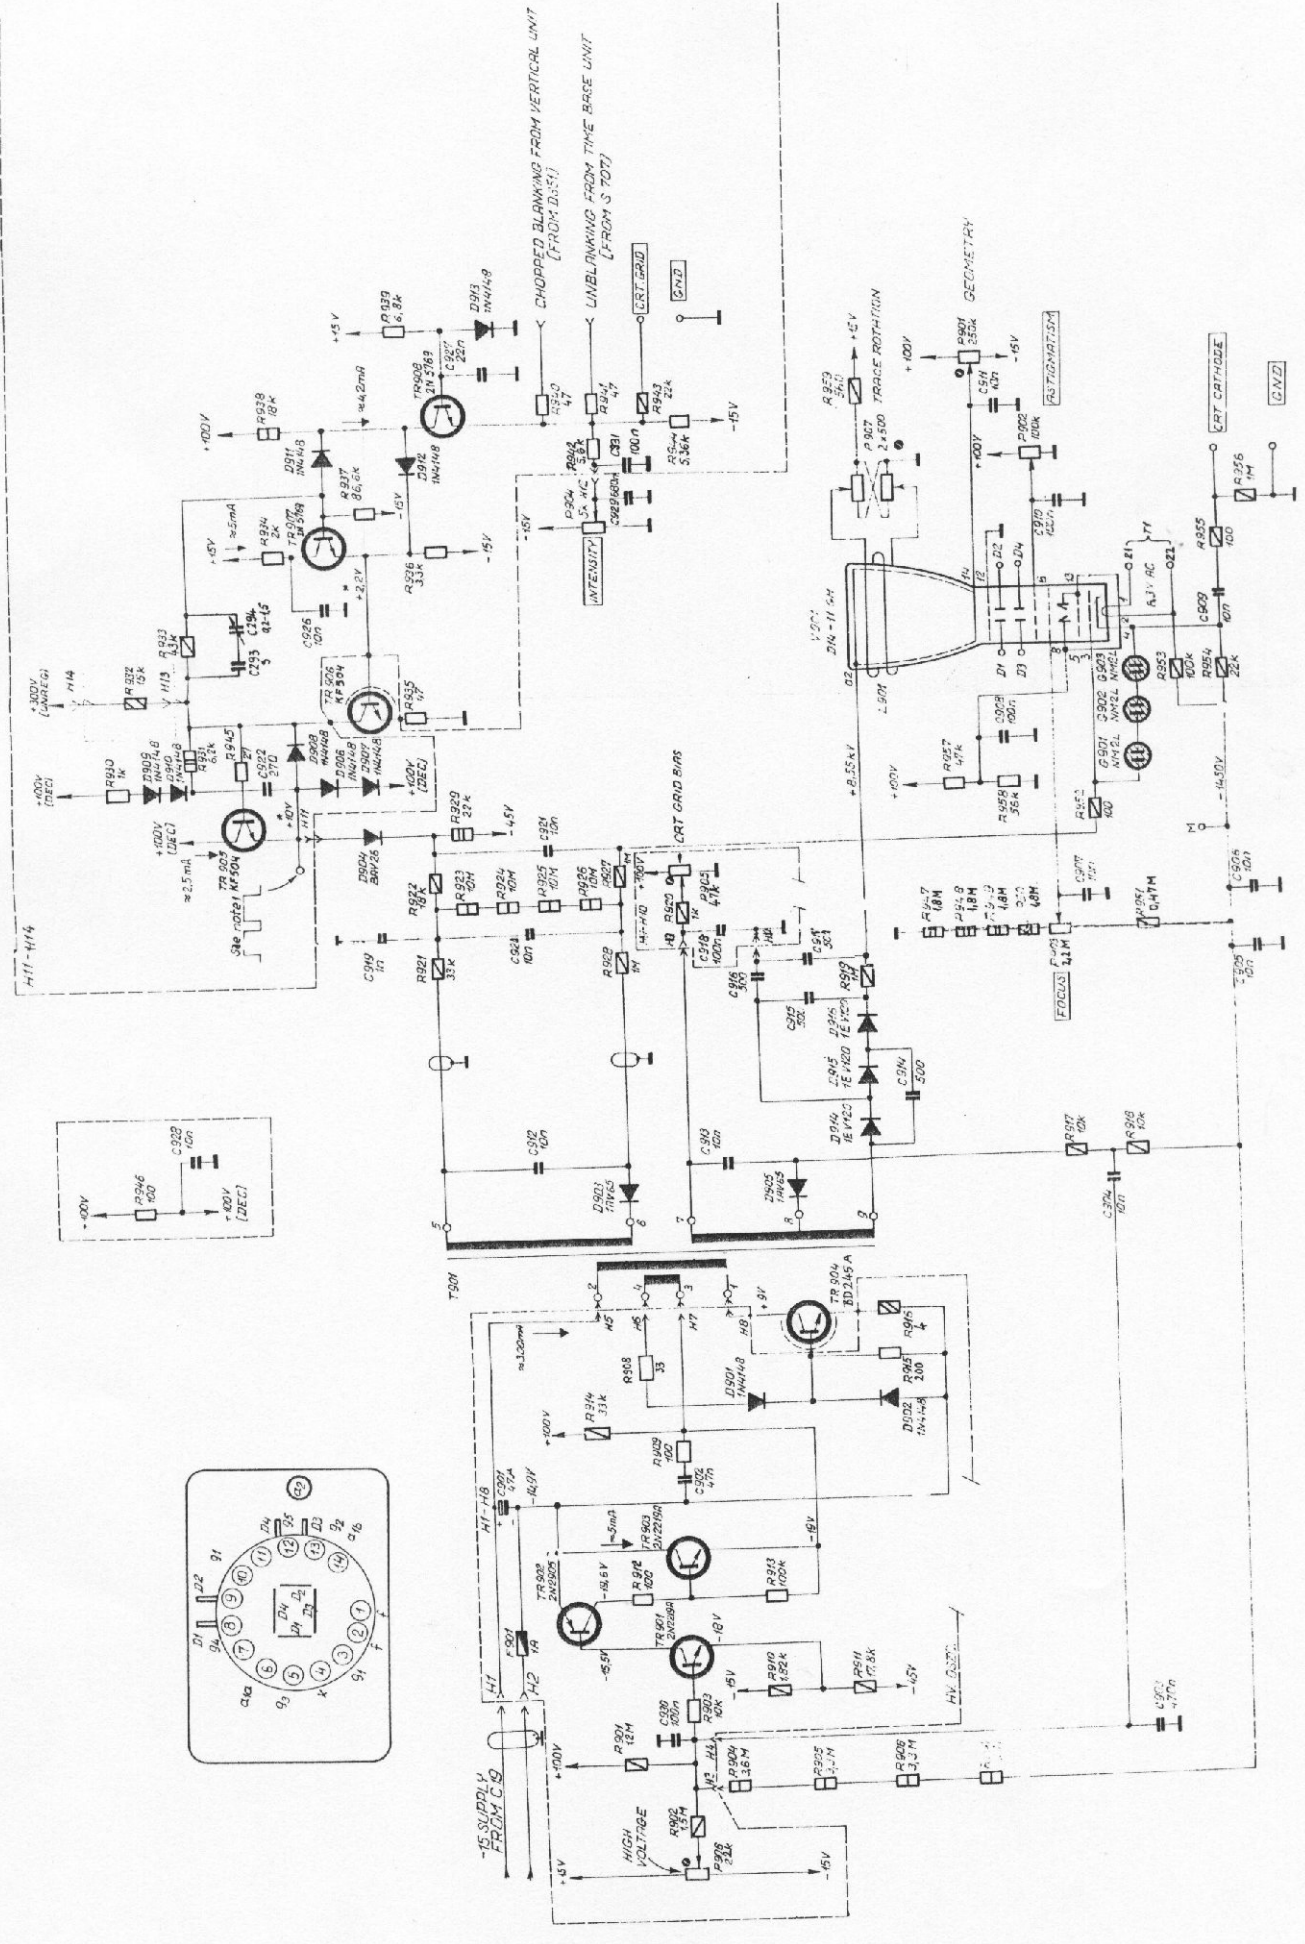

NOTE 1. AMPLITUDE VARIES WITH INTENSITY
SETTING. PEAK LIMITS ARE ABOUT
+10 AND -100 VOLTS.
* INTENSITY FULLY ON.