



COPAN™ VTL for DMF Quick Start Guide

007-5713-001

COPYRIGHT

© 2011 SGI. All Rights Reserved; provided portions may be copyright in third parties, as indicated elsewhere herein. No permission is granted to copy, distribute, or create derivative works from the contents of this electronic documentation in any manner, in whole or in part, without the prior written permission of SGI.

LIMITED RIGHTS LEGEND

The software described in this document is "commercial computer software" provided with restricted rights (except as to included open/free source) as specified in the FAR 52.227-19 and/or the DFAR 227.7202, or successive sections. Use beyond license provisions is a violation of worldwide intellectual property laws, treaties and conventions. This document is provided with limited rights as defined in 52.227-14.

TRADEMARKS AND ATTRIBUTIONS

COPAN, OpenVault, SGI, the SGI logo, Supportfolio, and XFS are trademarks or registered trademarks of Silicon Graphics International Corp. or its subsidiaries in the United States and other countries.

Celerra is a registered trademark of EMC Corporation. IBM is a registered trademark of International Business Machines Corporation. Linux is a registered trademark of Linus Torvalds in the U.S. and other countries. All other trademarks mentioned herein are the property of their respective owners.

Record of Revision

Version	Description
001	January 2011 Original publication

Contents

About This Guide	xi
Related Publications	xi
Obtaining Publications	xi
Conventions	xii
Reader Comments	xii
1. Introduction	1
DMF in a COPAN VTL Environment	1
Preliminary Requirements	2
Set Up the DMF Server and COPAN VTL System	3
Copy the Support Files to the VTL Application Servers	3
Create the Filesystems that DMF Requires	4
Determine the Backup Requirements For Your Site	4
Site-Specific Factors to Consider for Backups	4
Default Backup Policy for DMF and COPAN VTL	5
Values You Must Determine For Backups	6
Space Required for the Daily Backup	6
Number of Dump Tapes Required	6
Ensure that OpenVault Is Not Active	7
Overview of the Steps in this Guide	7
2. Configure DMF	11
Install the DMF License	12
Set Up the Environment for DMF	12

Create the DMF Configuration File	13
3. Create and Configure Each Virtual Library	23
Invoke the Console and Attach to the VTL Server	23
Adding the VTL Server at First Use	23
Subsequently Connecting to the VTL Server	26
Determine the Migration Tape Size for the Library	28
Create the Library	31
Configure Virtual Migration Tapes for the Library	41
Create Migration Tapes	41
Relabel the Migration Tapes	45
Free Space in Library SGI-C00 for Dump Tapes	46
Export Library Access to the DMF Server	51
Configure OpenVault for the Library	62
Add the <code>dmf</code> Application to OpenVault	63
Add an LCP for the Library	68
Add the Set of DCPs for the Library	73
Import the Migration Tapes for the Library	78
Test that OpenVault Can Mount a Migration Tape from the Library	81
4. Configure Virtual Dump Tapes	83
Create Dump Tapes	83
Relabel the Dump Tapes	86
Import the Dump Tapes into OpenVault	87
Test that OpenVault Can Mount a Dump Tape	90
5. Test the DMF System	91
Validate the DMF Configuration	91

Enable Audits of the DMF-Managed Filesystems	92
Test the DMF Configuration	96
Appendix A. Using an Extremely Large Number of Tapes	99
Number of Slots	99
Creating Tapes and Relabeling Barcodes in Batches	99
Appendix B. Enabling Compression	101
Appendix C. Reclaiming Space for Dumps	103

Figures

Figure 1-1	Sample COPAN VTL Configuration for DMF	2
Figure 2-1	DMF Configuration Sample for COPAN VTL	14
Figure 2-2	Copy the /dmi_fs Object	16
Figure 2-3	Replace the Filesystem Name	17
Figure 3-1	Adding the VTL Server	25
Figure 3-2	Connecting to the VTL Server	27
Figure 3-3	Determine the Total RAID Unit Size	29
Figure 3-4	Create a New Virtual Library	32
Figure 3-5	Select a Shelf	33
Figure 3-6	Specify the Library Vendor and Name	35
Figure 3-7	Enter Virtual Drive Information	36
Figure 3-8	Enter the Barcode Information	38
Figure 3-9	Finish Creating the Library	40
Figure 3-10	Select Physical Devices	42
Figure 3-11	Enter the Number of Tapes to Be Configured (Up to 50 at a Time)	43
Figure 3-12	Verify and Create Tapes	44
Figure 3-13	Delete Selected Migration Tapes to Free Space Needed for Dumps	49
Figure 3-14	Confirm the Deletion of a Tape on SGI-C00	50
Figure 3-15	Select the Initiator WWPN	53
Figure 3-16	Relationship of the "Initiator WWPN" Field to the DMF Server Port	54
Figure 3-17	Verify the DMF Server as the Client	55
Figure 3-18	Select the Library to Assign to the SAN	56
Figure 3-19	Relationship of the "Name" Field to the COPAN VTL	57

Figure 3-20	Select a Fibre Channel Target	58
Figure 3-21	Relationship of the Target WWPN Field to the COPAN VTL Port	59
Figure 3-22	Verify that the Initiator and Target WWPNs Correspond	60
Figure 3-23	Relationships Among the Library, the DMF Server Initiator Port, and the VTL Target Port	61
Figure 4-1	Change Tape Properties	84
Figure 4-2	Set the Maximum Capacity for Dump Tape Size	85
Figure B-1	Enabling Compression	102

About This Guide

This guide tells you how to configure an SGI® COPAN™ virtual tape library (VTL) system for use with the SGI InfiniteStorage Data Migration Facility (DMF) and the OpenVault™ mounting service using IBM® Ultrium-TD4 virtual tapes.

Related Publications

The following publications contain additional information:

- *COPAN 300T/TX System Administration Guide*
- *COPAN 400T/TX System Administration Guide*
- *OpenVault Operator's and Administrator's Guide*
- *DMF 5 Administrator's Guide for SGI InfiniteStorage*
- *DMF 5 Filesystem Audit Guide for SGI InfiniteStorage*
- *SGI InfiniteStorage Software Platform* release note (the `README.txt` file, see below to obtain)

Obtaining Publications

You can obtain SGI documentation as follows:

- See the SGI Technical Publications Library at <http://docs.sgi.com>. Various formats are available. This library contains the most recent and most comprehensive set of online books, man pages, and other information.
- You can view man pages by typing `man title` at a command line.
- The `/docs` directory on the ISSP DVD or in the Supportfolio™ download directory contains the following:
 - The ISSP release note: `/docs/README.txt`
 - DMF release notes: `/docs/README_DMF.txt`

- A complete list of the packages and their location on the media:
`/docs/RPMS.txt`
- The packages and their respective licenses: `/docs/PACKAGE_LICENSES.txt`
- The release notes and manuals are provided in the `noarch/sgi-isspdocs` RPM and will be installed on the system into the following location:
`/usr/share/doc/packages/sgi-issp-ISSPVERSION/TITLE`

Conventions

The following conventions are used throughout this document:

Convention	Meaning
<code>command</code>	This fixed-space font denotes literal items such as commands, files, routines, path names, signals, messages, and programming language structures.
<i>variable</i>	Italic typeface denotes variable entries and words or concepts being defined.
user input	This bold, fixed-space font denotes literal items that the user enters in interactive sessions. (Output is shown in nonbold, fixed-space font.)
[]	Brackets enclose optional portions of a command or directive line.
...	Ellipses indicate that a preceding element can be repeated.
manpage(x)	Man page section identifiers appear in parentheses after man page names.
GUI	This font denotes the names of graphical user interface (GUI) elements such as windows, screens, dialog boxes, menus, toolbars, icons, buttons, boxes, fields, and lists.

Reader Comments

If you have comments about the technical accuracy, content, or organization of this publication, contact SGI. Be sure to include the title and document number of the

publication with your comments. (Online, the document number is located in the front matter of the publication. In printed publications, the document number is located at the bottom of each page.)

You can contact SGI in any of the following ways:

- Send e-mail to the following address:

techpubs@sgi.com

- Contact your customer service representative and ask that an incident be filed in the SGI incident tracking system.
- Send mail to the following address:

SGI
Technical Publications
46600 Landing Parkway
Fremont, CA 94538

SGI values your comments and will respond to them promptly.

Introduction

This guide tells you how to configure an SGI® COPAN™ virtual tape library (VTL) system for use with the SGI InfiniteStorage Data Migration Facility (DMF) and the OpenVault™ mounting service using IBM® Ultrium-TD4 virtual tapes. This chapter discusses the following:

- "DMF in a COPAN VTL Environment" on page 1
- "Preliminary Requirements" on page 2
- "Overview of the Steps in this Guide" on page 7

Note: The procedures in this guide are for a basic DMF configuration (without the Parallel Data Mover Option or high availability).

DMF in a COPAN VTL Environment

The COPAN cabinet has up to eight shelves (shelf 0 through shelf 7) and two VTL application servers (referred to in this guide as VTL0 and VTL1) that control the shelves. VTL0 controls shelves 0–3, VTL1 controls shelves 4–7.

After you complete the procedures in this guide, the cabinet will behave as if it contains eight independent tape libraries (SGI-C00 through SGI-C07, one for each shelf). Each library will have one OpenVault library control program (such as c00) and a set of drive control programs (such as c00d1 through c00d7). Each library will be used as one DMF volume group (vg0 through vg7). The volume groups will be managed as two DMF migrate groups (mg0 and mg1), as shown in Figure 1-1. If you have a different number of shelves, you must modify the procedures in this guide and the DMF configuration file accordingly.

Note: SGI recommends that you use a COPAN VTL naming convention where SGI-C00 represents C for *COPAN*, 0 (zero) for cabinet 0, and 0 for shelf 0. SGI also recommends that you use a similar name but varying case to maintain a correspondence between the COPAN VTL view of the library (such as SGI-C00) and OpenVault's view of the library (such as c00). The suggested names used in this guide are also used in the sample DMF configuration file for COPAN VTL. If you do not use the names suggested here, you must modify the configuration file accordingly.

COPAN		OpenVault		DMF		
Cabinet	Virtual library	Library control program	Drive control programs	Drive group	Volume group	Migrate group
shelf 7	SGI-C07	c07	c07d1-c07d7	dg7	vg7	} mg1
shelf 6	SGI-C06	c06	c06d1-c06d7	dg6	vg6	
shelf 5	SGI-C05	c05	c05d1-c05d7	dg5	vg5	
shelf 4	SGI-C04	c04	c04d1-c04d7	dg4	vg4	
server VTL1						
server VTL0						
shelf 3	SGI-C03	c03	c03d1-c03d7	dg3	vg3	} mg0
shelf 2	SGI-C02	c02	c02d1-c02d7	dg2	vg2	
shelf 1	SGI-C01	c01	c01d1-c01d7	dg1	vg1	
shelf 0	SGI-C00	c00	c00d1-c00d7	dg0	vg0	

Figure 1-1 Sample COPAN VTL Configuration for DMF

Preliminary Requirements

Before you configure the virtual library and DMF, do the following:

- "Set Up the DMF Server and COPAN VTL System" on page 3
- "Copy the Support Files to the VTL Application Servers" on page 3

- "Create the Filesystems that DMF Requires" on page 4
- "Determine the Backup Requirements For Your Site" on page 4
- "Ensure that OpenVault Is Not Active" on page 7

Set Up the DMF Server and COPAN VTL System

You must ensure that the DMF server and the COPAN VTL system are on the network and zoned appropriately. You must also install the required software for COPAN VTL and DMF.

For more information, see: the hardware documentation for your systems, your COPAN system administration documentation, and the *SGI InfiniteStorage Software Platform* release note (see the Preface for the location).

Copy the Support Files to the VTL Application Servers

You must copy all of the files in the `/usr/lib/dmf/support/copan` directory on the DMF server to a new `/usr/local/dmf` directory on each of the VTL application servers (VTL0 and VTL1).

For example, for application server VTL0 and DMF server burn:

```
[root@VTL0 vtl]# pwd
/usr/local/dmf
[root@VTL0 vtl]# mkdir dmf
[root@VTL0 vtl]# cd dmf
[root@VTL0 dmf]# scp burn.mycompany.com:/usr/lib/dmf/support/copan/* .
Password:
dmreadycopantapes          100% 1347      1.3KB/s   00:00
iscli_copan_cmd            100% 2049      2.0KB/s   00:00
xslt3_copan                100% 1992      2.0KB/s   00:00
[root@VTL0 dmf]# ls
dmreadycopantapes  iscli_copan_cmd  xslt3_copan
```

Create the Filesystems that DMF Requires

Use the information about configuring DMF administrative filesystems and directories appropriately in the “Best Practices” chapter of the *DMF 5 Administrator’s Guide for SGI InfiniteStorage* to create the following required filesystems:

- `/dmf/home` for directories in which the DMF daemon database, library server (LS) database, and related files reside
- `/dmf/journals` for directories in which the journal files for the daemon database and LS database will be written
- `/dmf/spool` for directories in which DMF log files are kept
- `/dmf/tmp` for directories in which DMF puts temporary files for its own internal use
- `/dmf/move` for the scratch filesystem that is used to move files between media-specific processes (MSPs) or volume groups (VGs)
- `/dmf/cache`, in which the VG stores chunks of data while merging them from sparse tapes
- `/save/dmf` filesystem for storing backup copies of the DMF database

Determine the Backup Requirements For Your Site

This section discusses the following:

- "Site-Specific Factors to Consider for Backups" on page 4
- "Default Backup Policy for DMF and COPAN VTL" on page 5
- "Values You Must Determine For Backups" on page 6

Site-Specific Factors to Consider for Backups

The backup requirements depend upon a number of very site-specific factors, including the following:

- The amount of data that is migrated and the amount of data that is not migrated at the time a dump takes place
- The number of inodes (10 million inodes will require approximately 8 GB on a dump tape)

- The size of the DMF databases (see the information about configuring DMF administrative filesystems and directories appropriately in the “Best Practices” chapter of the *DMF 5 Administrator’s Guide for SGI InfiniteStorage*, particularly the information about HOME_DIR size)
- The backup methodology for using full and/or partial dumps
- The retention period for dump tapes

For more information, see the “Best Practices” chapter of the *DMF 5 Administrator’s Guide for SGI InfiniteStorage*.

Default Backup Policy for DMF and COPAN VTL

The sample DMF configuration file for COPAN VTL does the following:

- Performs a full backup once a week (Sundays at 00:00) and a partial backup the remaining days (Monday—Saturday at 00:00), creating dumps of the following filesystems:
 - /dmf/home
 - /dmf/journals
 - All DMF-managed filesystems
- Causes all of the file data in the DMF-managed filesystems to be migrated before the dumps take place (except for files that are explicitly marked as never to be migrated).
- Removes the bit-file identifiers from the DMF databases for permanently deleted files.
- Retains the dumps for four weeks (28 days). The backup each day requires at least one dump tape. The dumps for each day’s backup will be put on a single tape if possible. Tapes are recycled after the retention period is completed.

If you want to change these backup policies, you must modify the DMF configuration file and the procedures in this guide accordingly. For more information, see the *DMF 5 Administrator’s Guide for SGI InfiniteStorage*.

Values You Must Determine For Backups

You must determine the following:

- "Space Required for the Daily Backup"
- "Number of Dump Tapes Required"

Space Required for the Daily Backup

The amount of space that will be required by your site for the dumps created by each day's backup depends upon the information discussed in "Site-Specific Factors to Consider for Backups" on page 4. This amount is the *Dump_Space_Needed_Per_Day* value, which you will use later in step 1a and step 2 of "Free Space in Library SGI-C00 for Dump Tapes" on page 46.

In general, a smaller size is better for dump tapes in order to use space efficiently, so long as all of the dumps for each day's backup can fit onto one tape. (However, if the dumps for day's backup require more than one tape, it will increase the complexity and time requirements of restores.)

Number of Dump Tapes Required

The number of dump tapes that will be used depends upon the retention period and the information in "Site-Specific Factors to Consider for Backups" on page 4.

Tapes are recycled only after the retention period is completed, therefore you must have more dump tapes than are required to fulfill the retention period (at least one extra tape). Assuming that dumps are done daily, the minimum number of tapes required is:

$$\text{Retention_Period_In_Days} + 1 = \#_Dump_Tapes$$

For example, using the retention period of 4 weeks (28 days) in the DMF sample configuration file for COPAN VTL:

$$28 + 1 = 29 \text{ tapes}$$

So long as the dumps for each day's backup can fit onto one dump tape, this means that at a minimum 29 dump tapes are required for dumps, assuming that backups are performed each day. You will use the *#_Dump_Tapes* value in step 1b of "Free Space in Library SGI-C00 for Dump Tapes" on page 46.

Note: You should monitor the dump report daily to verify that there are sufficient tapes available for future dumps.

Ensure that OpenVault Is Not Active

You must ensure that OpenVault is not actively being used by other applications. For example, verify that no processes are displayed by the `ov_procs(8)` command, as in the following example:

```
dmfserver# ov_procs
PID      PPID     COMMAND
dmfserver#
```

Note: For simplicity and efficiency, the procedures in this guide stop OpenVault at various points. If you have other applications that are currently running OpenVault, those applications will be affected.

Overview of the Steps in this Guide

Note: The steps in this guide reflect the preferred and tested configuration. Other configurations may be possible.

This guide leads you through the following steps, which you will perform as the `root` user:

1. Configure DMF:
 - a. Install the DMF license.
 - b. Set up the environment for DMF.
 - c. Create the DMF configuration file by using DMF Manager.
2. Create and configure each virtual library in turn, beginning with shelf 0, which will be configured as library `SGI-C00`:

- a. Invoke the VTL Console graphical user interface and attach to the appropriate VTL server.
- b. Determine the size of migration tapes for the library.
- c. Create the library.

Note: If your site's data would benefit from software compression, you can enable COPAN VTL compression mode (and therefore DMF compression) for each application server (VTL0 and VTL1). See the optional Appendix B, "Enabling Compression " on page 101. However, compression carries an overhead CPU penalty and is not appropriate in all cases.

- d. Configure virtual migration tapes for the library:
 - I. Create migration tapes.
 - II. Relabel the migration tapes.
- e. Free space in the library on shelf 0 (SGI-C00) for dump tapes. You will do this only for shelf 0.

Note: All of the dump tapes must be on a single shelf. The sample DMF configuration file defines this to be shelf 0. If you want to use a different shelf, you must modify the DMF configuration file drive group and the procedures in this guide accordingly.

- f. Export library access to the DMF server.
- g. Configure OpenVault for the library:
 - I. Add the `dmf` application to OpenVault (do just once, when creating the first library).
 - II. Add a library control program (LCP) for the library.
 - III. Add the set of drive control programs (DCPs) per library (one for each drive).
 - IV. Import the migration tapes for the library.
 - V. Test that OpenVault can mount a migration tape from the library.

After completing these steps for library SGI-C00, repeat them for shelf 1 and library SGI-C01, and so on until you have completed the last library (such as SGI-C07).

3. Create virtual dump tapes:
 - a. Create dump tapes.
 - b. Relabel the dump tapes.
 - c. Import the dump tapes into OpenVault.
 - d. Test that OpenVault can mount a dump tape.
4. Test DMF:
 - a. Validate the DMF configuration by using DMF Manager or the `dmcheck(8)` command.
 - b. Verify the DMF-managed filesystems by using the `dmaudit(8)` command.
 - c. Test the DMF configuration.



Caution: After your system is configured and running, you should ensure that DMF is not using any of its virtual tape drives and then stop the OpenVault LCPs associated with the COPAN VTL **before** stopping the COPAN VTL. For more information, see the “Best Practices” chapter of the *DMF 5 Administrator’s Guide for SGI InfiniteStorage*

Configure DMF

This chapter describes the minimum steps required to get DMF up and running with a COPAN VTL system:

- "Install the DMF License" on page 12
- "Set Up the Environment for DMF" on page 12
- "Create the DMF Configuration File" on page 13

For more information, see the following:

- *DMF 5 Administrator's Guide for SGI InfiniteStorage*
- *DMF 5 Filesystem Audit Guide for SGI InfiniteStorage*
- DMF man pages:

- `dmput(1)`
- `dm1s(1)`
- `dmf.conf(5)`
- `dmdidle(8)`

Install the DMF License

To install the DMF license, copy the DMF license key into the `/etc/lk/keys.dat` file on the DMF server. For more information, see the chapter about licensing in the DMF administrator's guide.

Set Up the Environment for DMF

To set up the environment for DMF, do the following:

1. Verify that the required DMF administrative filesystems and DMF-managed filesystems are mounted. For example:

```
dmfserver# df -h
...
/dev/lxvm/lun5s8      47G   69M   47G   1% /save/dmf
/dev/lxvm/lun5s3      47G   65M   47G   1% /dmf/move
/dev/lxvm/lun5s5      47G   66M   47G   1% /dmi_fs
/dev/lxvm/lun5s0      47G   70M   47G   1% /dmf/tmp
/dev/lxvm/lun5s2      47G   79M   47G   1% /dmf/home
/dev/lxvm/lun5s1      47G  107M   47G   1% /dmf/spool
/dev/lxvm/lun5s9      47G   69M   47G   1% /dmf/journals
/dev/lxvm/lun5s7      47G   65M   47G   1% /dmf/cache
...
```

For more information, see "Create the Filesystems that DMF Requires" on page 4.

2. Create the following directories, which are used by the default DMF configuration for administrative tasks:

```
dmfserver# mkdir -p /dmf/home/dump_tasks /save/dmf/database_copies /dmf/journals/database_copies /etc/dmf
```

3. Create an empty `/dmf/home/dump_tasks/tapes` file. For example:

```
dmfserver# touch /dmf/home/dump_tasks/tapes
```

Create the DMF Configuration File

To create the DMF configuration using the DMF Manager graphical user interface, do the following:

1. Start the DMF Manager service:

```
dmfserver# service dmfman start
```

2. Invoke DMF Manager by pointing your browser to the following location:

```
https://your_hostname/1179
```

Accept the security certificate and enter in the `dmfman` access password (INSECURE by default.) For more information, see the chapter about using DMF Manager in the DMF administrator's guide. You can use the **Help** button in DMF Manager to access the DMF administrator's guide.

3. Populate DMF Manager with the sample DMF configuration file for COPAN VTL use. To do this, right-click in the **Overview** panel and select:

```
Pre-Configured  
> COPAN VTL LS Sample
```

Note: The first time you configure DMF, you are automatically given `admin` access. After you save the configuration, you must thereafter log in as the `admin` user to make changes. For more information, see the chapter about DMF Manager in the DMF administrator's guide..

Figure 2-1 shows the menu selection to populate DMF Manager with the appropriate sample configuration for a COPAN VTL.

2: Configure DMF

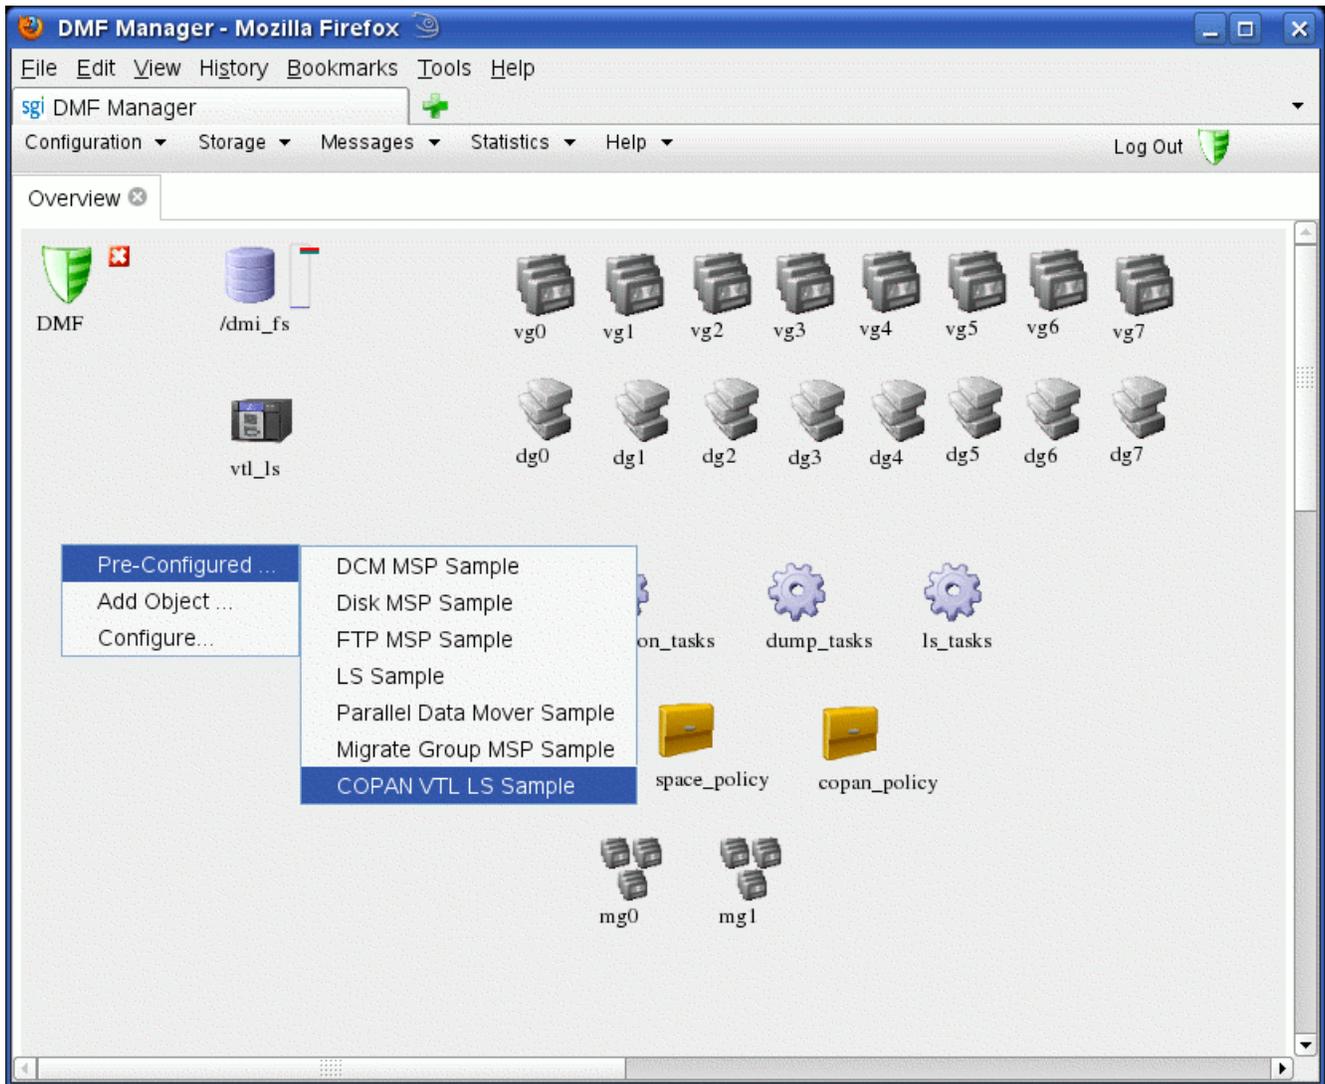


Figure 2-1 DMF Configuration Sample for COPAN VTL

The sample configuration file defines the following:

- One library server: `ls`
- Eight drive groups: `dg0` through `dg7`
- Eight volume groups: `vg0` through `vg7`
- Two migrate groups: `mg0` and `mg1`
- The DMF administrative filesystems, as described in "Create the Filesystems that DMF Requires" on page 4

Depending upon your site-specific configuration, you must modify or delete some of these objects, as directed in the next step.

4. Make the following changes to the sample configuration, based on the configuration at your site:
 - a. For each filesystem that DMF will manage, copy and paste the `/dmi_fs` object, renaming it with the filesystem name. Right-click the `/dmi_fs` object and select:

Configure...
 > **Copy**

Figure 2-2 shows an example.

2: Configure DMF

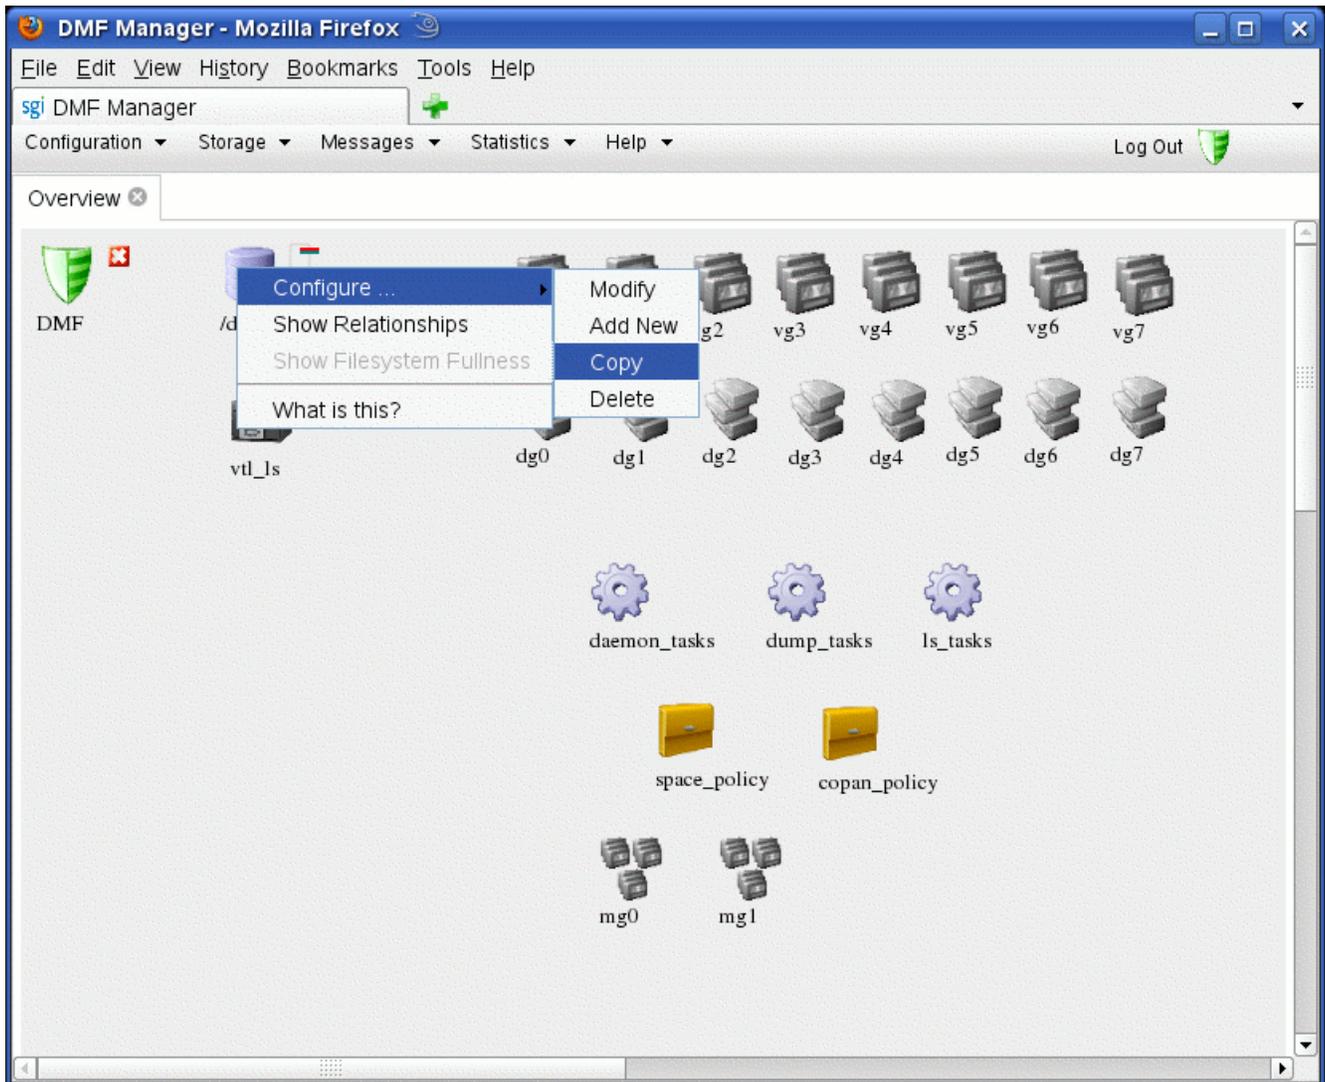


Figure 2-2 Copy the /dmi_fs Object

In the copy, delete the /dmi_fs name and replace it with the name of your filesystem. Figure 2-3 shows an example using the name /myfs.

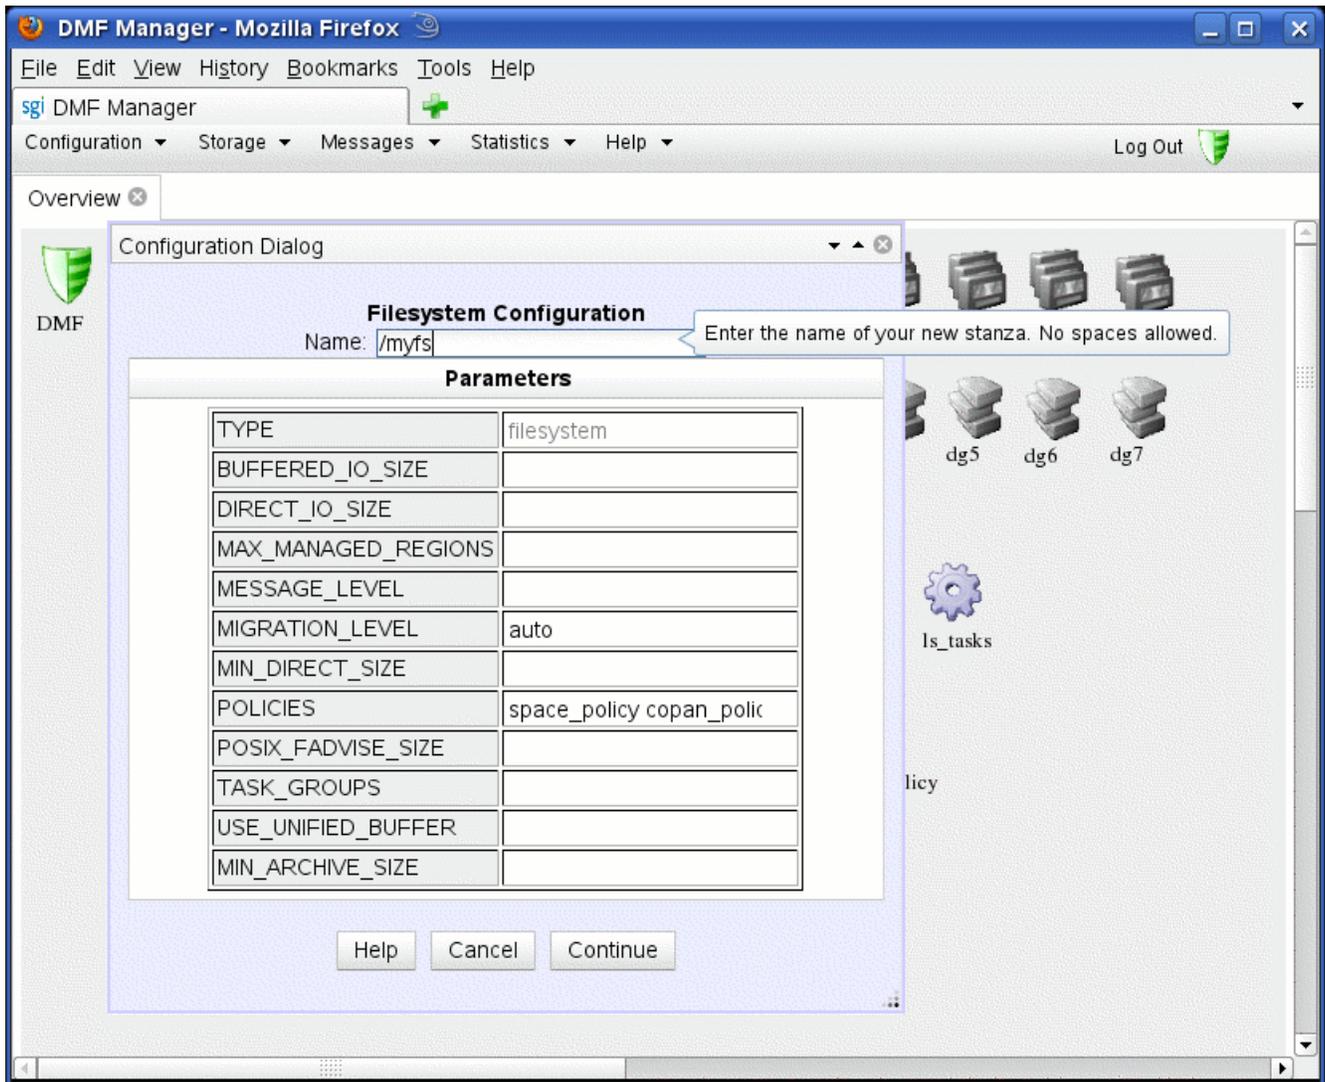


Figure 2-3 Replace the Filesystem Name

You may want to enter a value for the `DIRECT_IO_SIZE` parameter in order to improve I/O performance. Then click **Continue**.

Note: For help on a parameter, right-click the parameter name.

When you have an object for each filesystem, delete the sample `/dmi_fs` object.

- b. Modify the `DUMP_FILE_SYSTEMS` parameter so that it contains all of the filesystems that you want backed up. You should include `/dmf/home`, `/dmf/journals`, and all of the user filesystems that are managed by DMF.
- c. Change the `ADMIN_EMAIL` parameter to an appropriate address for your site. Right-click the DMF shield icon and select:

Configure
> **Modify Base**

Delete the default address and enter in the address for your site. Click **Continue**.

- d. If you have fewer than eight shelves, modify the DMF configuration accordingly. Using the procedures in this guide, there should be one drive group and one volume group per shelf, and the migrate groups should contain a balanced number of volume groups. The procedures assume eight shelves. For example, if you have six shelves, you would do the following:
 - Delete `dg6`, `dg7`, `vg6`, and `vg7`
 - Move `vg3` to `mg1` (so that `mg0` and `mg1` each have three volume groups)

Table 2-1 on page 19 summarizes parameters of interest, grouped by the object that contains the parameter.

5. Validate your changes. Right-click anywhere within the **Overview** panel and select:

Configure
> **Validate Configuration**

You will see errors about OpenVault and a DMF database, because they are not yet configured:

```
ERROR: No OpenVault drives configured.
ERROR: OpenVault server is not up or client is misconfigured.
ERROR: Database (/dmf/home/vtl_ls/tpvrdb.dat) does not exist.
```

The above errors are expected at this point, and you can disregard them. However, if there are any other errors or warnings, fix them and then rerun the validation. Proceed to step 6 when there are no errors and preferably no warnings, other than the expected OpenVault and database errors.

6. Save the configuration. Right-click anywhere within the **Overview** panel and select:

Configure
> **Apply Configuration**

Table 2-1 DMF Configuration Parameters of Interest

Object	Parameter	Description
base (available via the DMF shield icon)	ADMIN_EMAIL	Specifies the e-mail address to receive output from administrative tasks. Change this to something meaningful to your site.
v1l_ls	COPAN_VSNS	Specifies that the fourth character of the <i>volume serial number</i> (VSN) indicates the RAID unit that contains the virtual tape. (The VSN is the same as the barcode in the VTL console.) This specification applies for all VSNs in this library server. Leave this set to ON when using the procedures in this guide.
v1l_ls	DRIVE_GROUP	Specifies one or more drive groups containing drives that the library server can use for mounting and unmounting volumes. You must list your drive groups (such as dg0–dg7), one for each library (such as c00–c07) that you defined.

2: Configure DMF

Object	Parameter	Description
dg0-dg7	MOUNT_SERVICE_GROUP	<p>Specifies the name by which the object's devices are known to the mounting service. For each drive group (such as dg0-dg7), you must associate the OpenVault library (such as c00-c07) and its associated volume group (such as vg0-vg7). The number of drives is site-specific; delete any unused drive group objects.</p> <hr/> <p>Note: If you do not use the suggested naming conventions later in this procedure (such as c00 when you get to step 3g of "Add the Set of DCPs for the Library" on page 73), you must modify the MOUNT_SERVICE_GROUP parameter to tell the DMF drive group the name of the OpenVault drive group. If you follow the suggestions in the procedure, no change is required.</p> <hr/>
vg0-vg1	MAX_PUT_CHILDREN	<p>Specifies the maximum number of write child (dmatwc) processes that will be simultaneously scheduled for the volume group. You should use a value in the range 2-4. Larger numbers of children may provide more total write bandwidth, but the bandwidth increases will diminish rapidly with additional children and all of the children will write more slowly.</p>
vg0-vg7	RESERVED_VOLUMES	<p>Reserves some tapes specifically for merging. (If all tapes on a COPAN VTL were to fill, then you would not be able to reclaim space by merging tapes, unlike a physical tape library, for which you could add a few tapes in order to do merges.) Always set this parameter to at least 1 for COPAN VTL systems.</p>
mg0 , mg1	GROUP_MEMBERS	<p>Lists the volume groups (such as vg0-vg7).</p>
mg0 , mg1	MULTIPLIER	<p>Specifies the amount of data to be sent to a group member relative to the other members listed in GROUP_MEMBERS. There should be a value for each member in GROUP_MEMBERS.</p>

Object	Parameter	Description
dump_tasks	DUMP_FILE_SYSTEMS	<p>Specifies the filesystems that are to backed up.</p> <hr/> <p>Note: You must remember to update this parameter if you later add a new or change the name of a DMF-managed user filesystem.</p> <hr/>
vg0-vg7	ZONE_SIZE	<p>Specifies approximately how much data the write child should put in a zone. You might want to adjust this parameter to achieve better performance, based on file size migrations specific to your site. For more information, see the DMF administrator's guide.</p> <hr/>

Create and Configure Each Virtual Library

Do the following for each virtual library in turn:

- "Invoke the Console and Attach to the VTL Server" on page 23
- "Determine the Migration Tape Size for the Library" on page 28
- "Create the Library" on page 31
- "Configure Virtual Migration Tapes for the Library" on page 41
- "Free Space in Library SGI-C00 for Dump Tapes" on page 46
- "Export Library Access to the DMF Server" on page 51
- "Configure OpenVault for the Library" on page 62

Note: The example output for some commands shown here has been edited for length and readability.

Invoke the Console and Attach to the VTL Server

This section discusses the following:

- "Adding the VTL Server at First Use" on page 23
- "Subsequently Connecting to the VTL Server " on page 26

Adding the VTL Server at First Use

The very first time you access the VTL Console, you must add the VTL Server. Do the following:

1. Start the VTL Console according to the directions in your COPAN VTL system administrator's guide.
2. Add the VTL server and log in to the VTL Console:

- a. Right-click the **COPAN *nnn* Servers** entry in the left-hand tree and select **Add**, as shown in Figure 3-1.
- b. Enter the following in the dialog box:
 - The name of the VTL server (such as VTL0) or its IP address
 - The user name `root`
 - The password `CPN200t`
- c. Click **OK**.

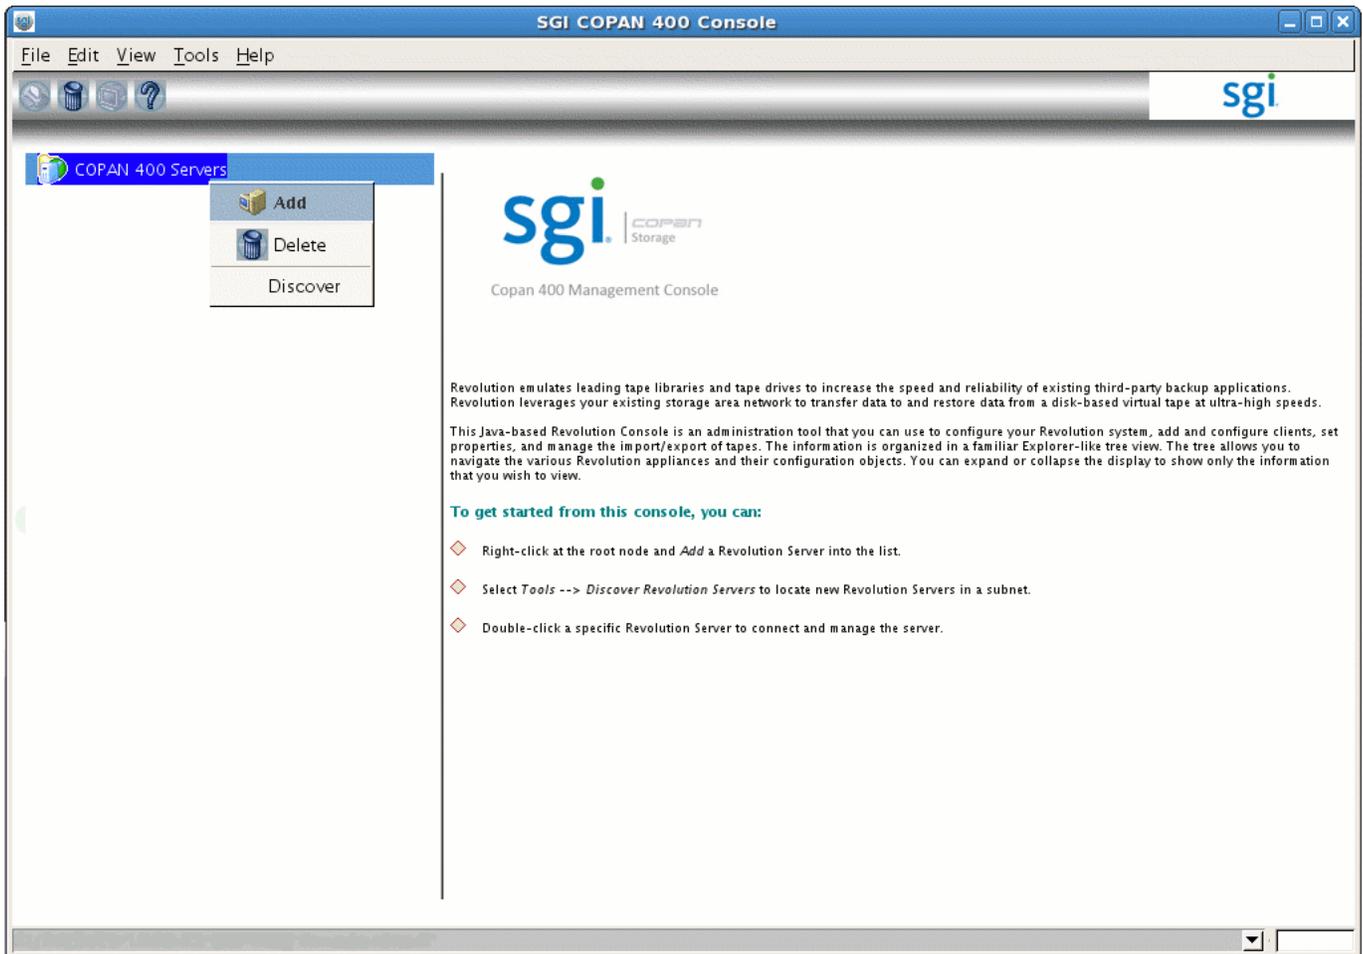


Figure 3-1 Adding the VTL Server

You can then proceed to "Determine the Migration Tape Size for the Library" on page 28.

Subsequently Connecting to the VTL Server

After the initial log in, you can connect to the VTL Console via the VTL server. Do the following:

1. Start the VTL Console according to the directions in your COPAN VTL system administrator's guide.
2. Right-click the VTL server name, such as **VTL0**, in the left-hand tree and select **Connect**, as shown in in Figure 3-2.
3. Enter the user name and password.
4. Click **OK**.

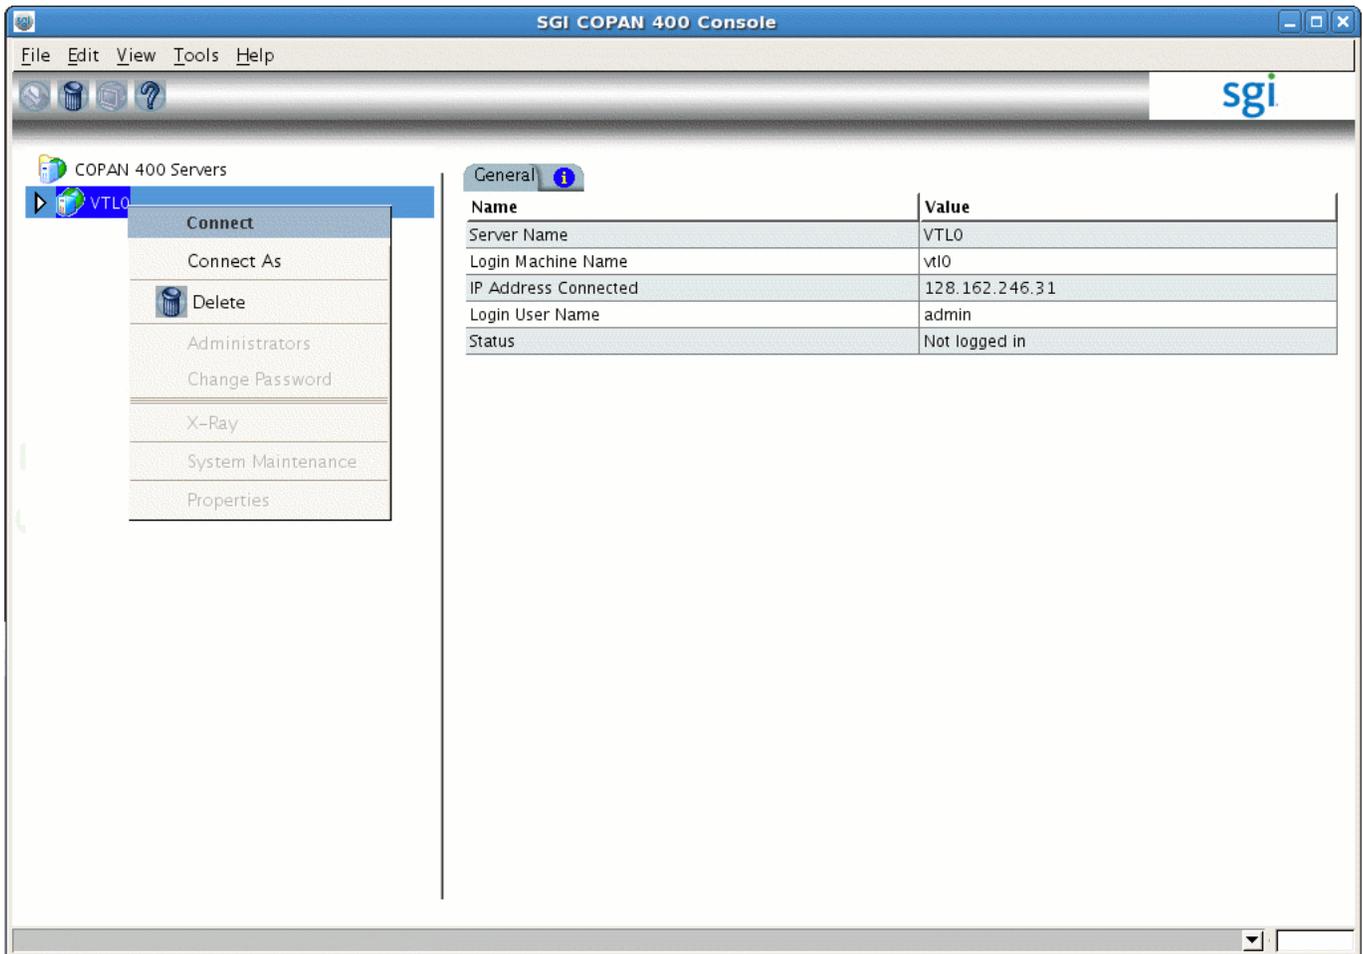


Figure 3-2 Connecting to the VTL Server

You can then proceed to "Determine the Migration Tape Size for the Library" on page 28.

Determine the Migration Tape Size for the Library

There are eight COPAN shelves, and each shelf consists of 26 RAID units. Each of those RAID units is configured to hold a fixed number of virtual tapes, all of which are the same size. You must specify the size of the virtual tapes.

Note: It is possible for different shelves in the same COPAN cabinet to contain RAID units with different capacities, so each shelf could have a different optimal virtual tape size.

You should select the number of migration tapes and the tape size that best accommodate the way you want to use DMF and that will best fit into your usable RAID unit space. (A certain percentage of space on the RAID is required for overhead. A greater number of tapes requires a larger amount of overhead.)

By default, the Console creates virtual tapes that are the same size as the corresponding physical tapes that are being emulated; because a virtual tape cannot span RAID units, this can end up wasting otherwise usable RAID space. For example, a RAID unit with 1,433 GB of usable space could accommodate only one 768-GB tape, wasting RAID space. Therefore, you want to select a different tape size if you are not obligated to match the physical size. You should choose a number of virtual tapes and a virtual tape size that wastes as little space as possible.

Note: If you want a huge number of tapes (more than the default slot number of 678), including both migration tapes and dump tapes, see Appendix A, "Using an Extremely Large Number of Tapes" on page 99.

1. Use the left-hand tree to access the **SCSI Devices** tab for the shelf you want to configure, such as the following for shelf 0:

- VTLO**
 - > **Physical Resources**
 - > **Storage Devices**
 - > **Fibre Channel Devices**
 - > **Shelf 0**

2. Record the number that appears in the right panel under the column header **Size (MB)** (such as the number 1,430,414 shown in Figure 3-3). This is the total RAID unit size.

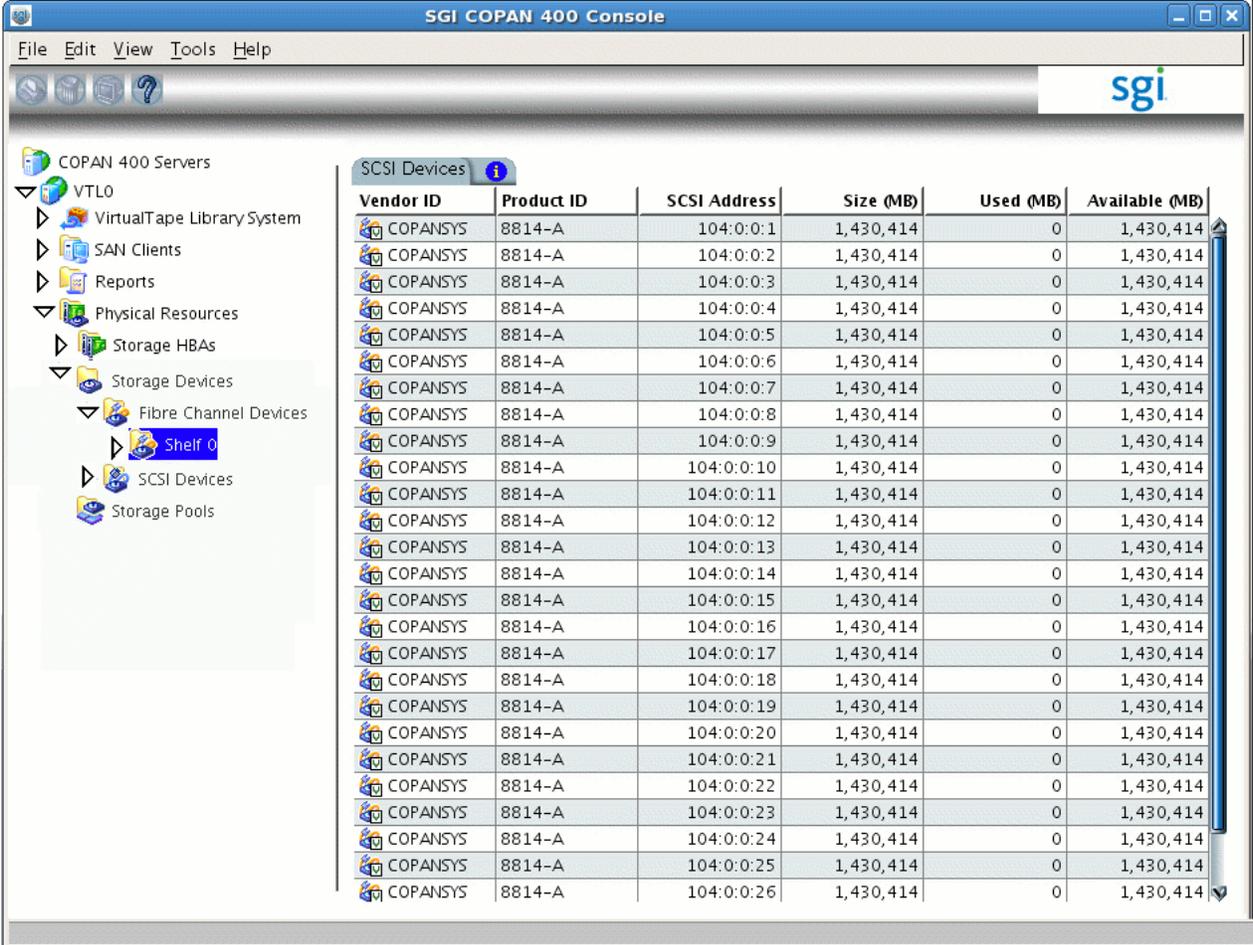


Figure 3-3 Determine the Total RAID Unit Size

Table 3-1 shows suggested tape sizes for common RAID unit sizes.

Table 3-1 Suggested Tape Sizes for Common RAID Unit Sizes

RAID Unit Size (MB)	Number of Tapes Per RAID Unit	Virtual Tape Size
715,229	1	698
715,229	2	349
1,430,414	2	698
1,430,414	3	465
1,430,414	4	349

If you have a RAID unit size listed in Table 3-1, record the value for use later (in step 7b of "Create the Library" on page 31). Otherwise, go on to step 3 to determine the tape size for the library.

3. Multiply the total RAID unit size by .976 to get the approximate amount of usable space. You can then divide that result by the desired number of tapes to see what each corresponding virtual tape size is; choose the size that will give you the number of tapes you prefer while wasting the least amount of space.

In general, a larger number of smaller-sized virtual tapes will result in fewer partially-full tapes in the DMF database (and therefore more room for new data). This can potentially provide faster recalls of migrated data because there are more tapes available for reading (you cannot simultaneously write to and read from the same tape). However, you do not want to use tapes that are unreasonably small, as that might cause excessive mounts and unmounts. Typically, you want to use a migration tape that is at least 500 GB.

Use the following formula as a guideline:

$$(Total_RAID_Size * .976) / \#_Migration_Tapes = Migration_Tape_Size$$

For example, if your total RAID size is 1,430,414 MB and you want two tapes, the resulting virtual tape size would be approximately 698,042.032 MB (or 698 GB).

$$(1430414 \text{ MB} * .976) / 2 = 698042.032 \text{ MB (or 698 GB)}$$

Record this information for use later (in step 7b of "Create the Library" on page 31).

Create the Library

Do the following:

1. Open the left-hand tree and place the cursor over **Virtual Tape Libraries**, such as the following for VTL0:

VTL0

> **Virtual Tape Library System**

> **Virtual Tape Libraries**

Right-click and select **New** as shown in Figure 3-4.

3: Create and Configure Each Virtual Library

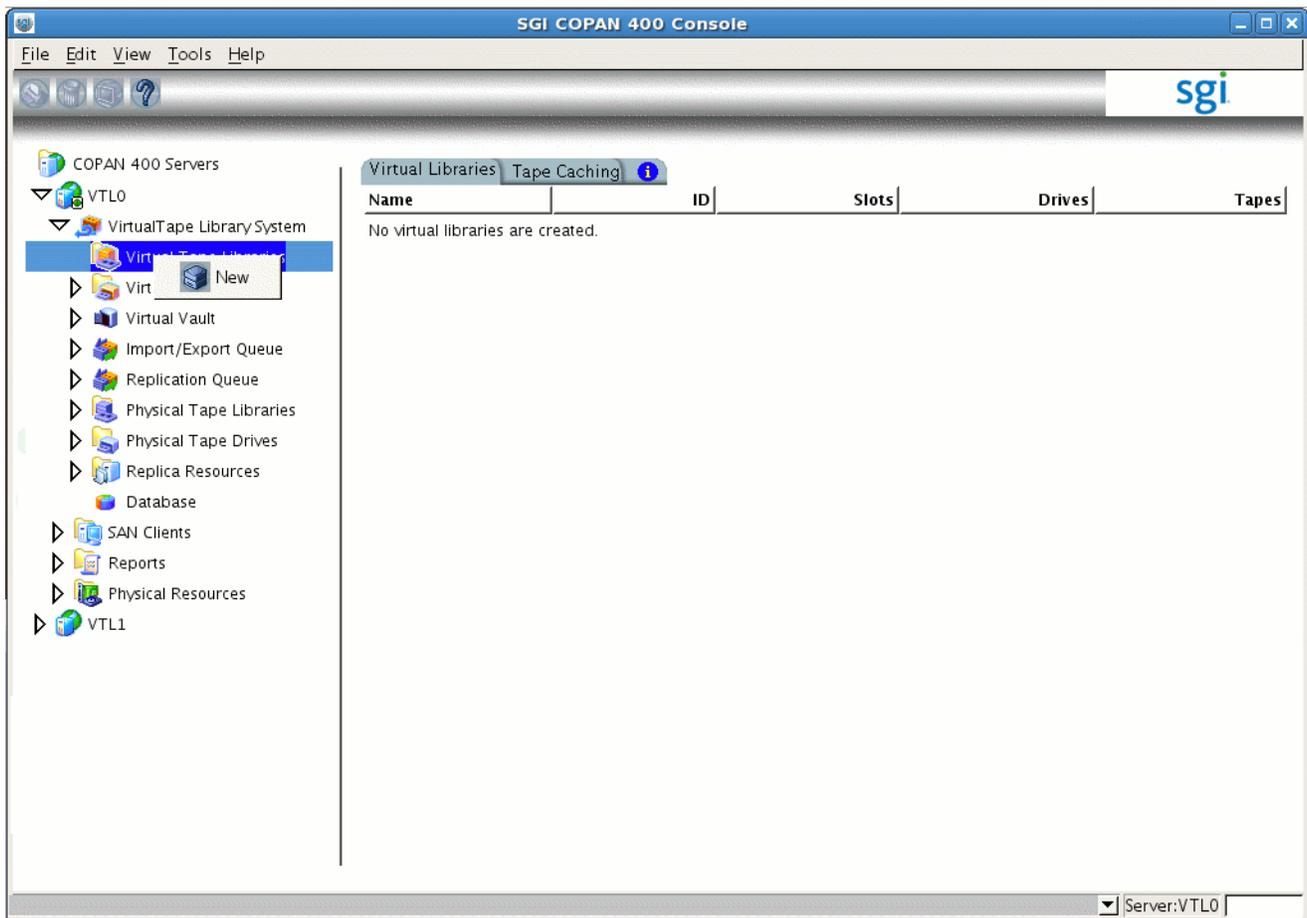


Figure 3-4 Create a New Virtual Library

2. Select a shelf by clicking the check box. Begin with shelf number 0, as shown in Figure 3-5.

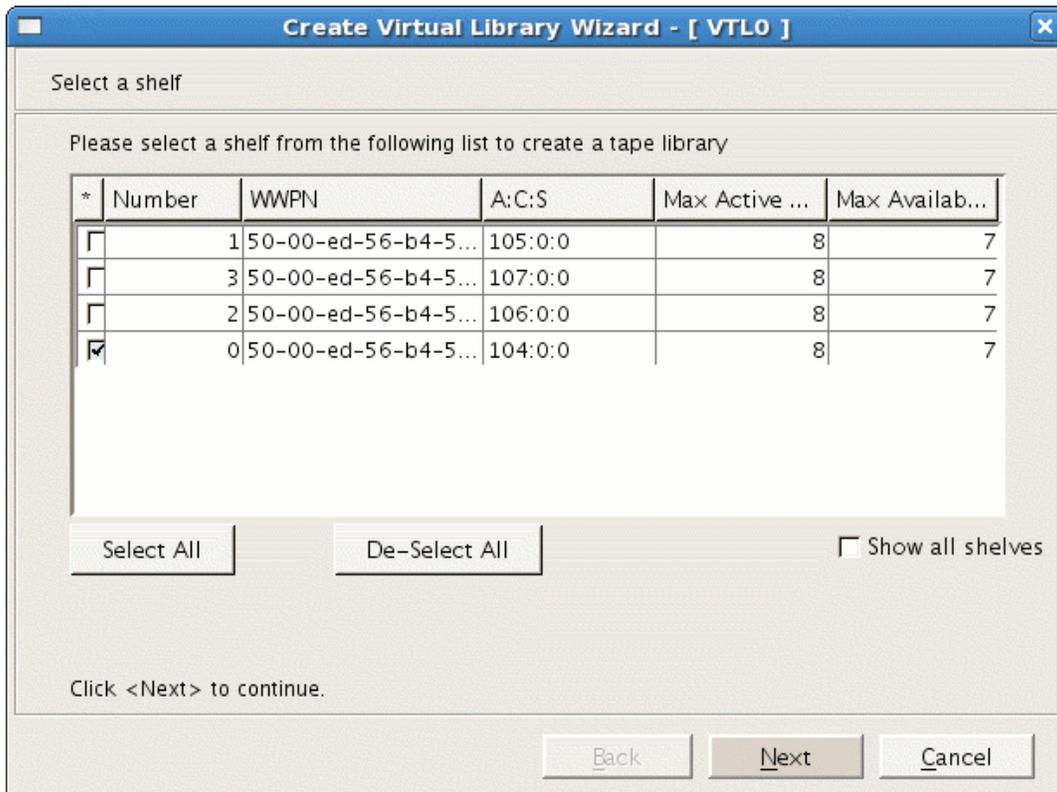


Figure 3-5 Select a Shelf

Take note of the **Max Available** drives (for use later in step 4c) and click **Next**.

3. Select the vendor ID type and then name the virtual library **in that order**, as shown in Figure 3-6.

Note: If you name the library first and then select the vendor ID type, the library name will be replaced by the default name. For simplicity during operation, SGI recommends that you **do not use the default name** but instead manually enter a name that corresponds to the shelf number.

- a. Select **SGI** under **Vendor ID**.
- b. Change the library name in the **Virtual Library Name** field so that it corresponds to the COPAN shelf number, such as **SGI-C00** for COPAN shelf 0, **SGI-C01** for COPAN shelf 1, and so on.
- c. Click **Next**.

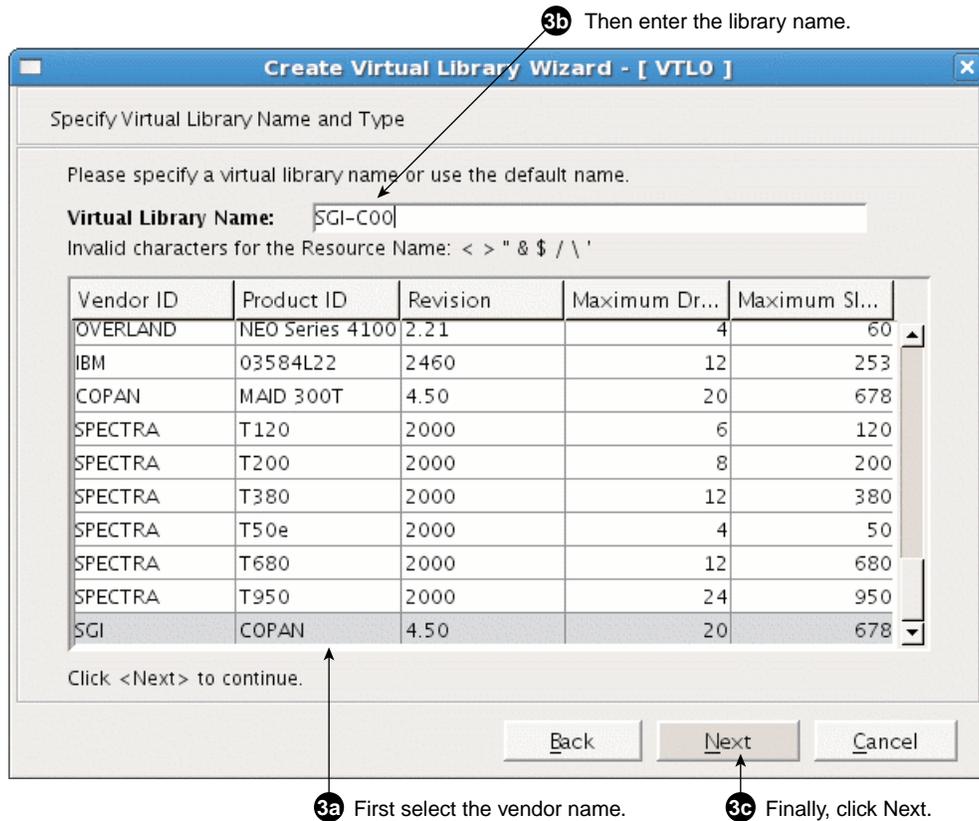


Figure 3-6 Specify the Library Vendor and Name

4. Enter the virtual drive information:
 - a. Select the **IBM ULTRIUM-TD4** product ID row.
 - b. Use the resulting default name in the **Virtual Drive Prefix** field.
 - c. Specify the **Max Available** value noted above in step 2 (rather than use the default) for **Total Virtual Drives**.

Note: The example procedure presented in this guide uses the value 7. If your system has a different number of maximum available drives, you must adjust this procedure and the contents of the DMF configuration file accordingly.

- d. Click **Next**.

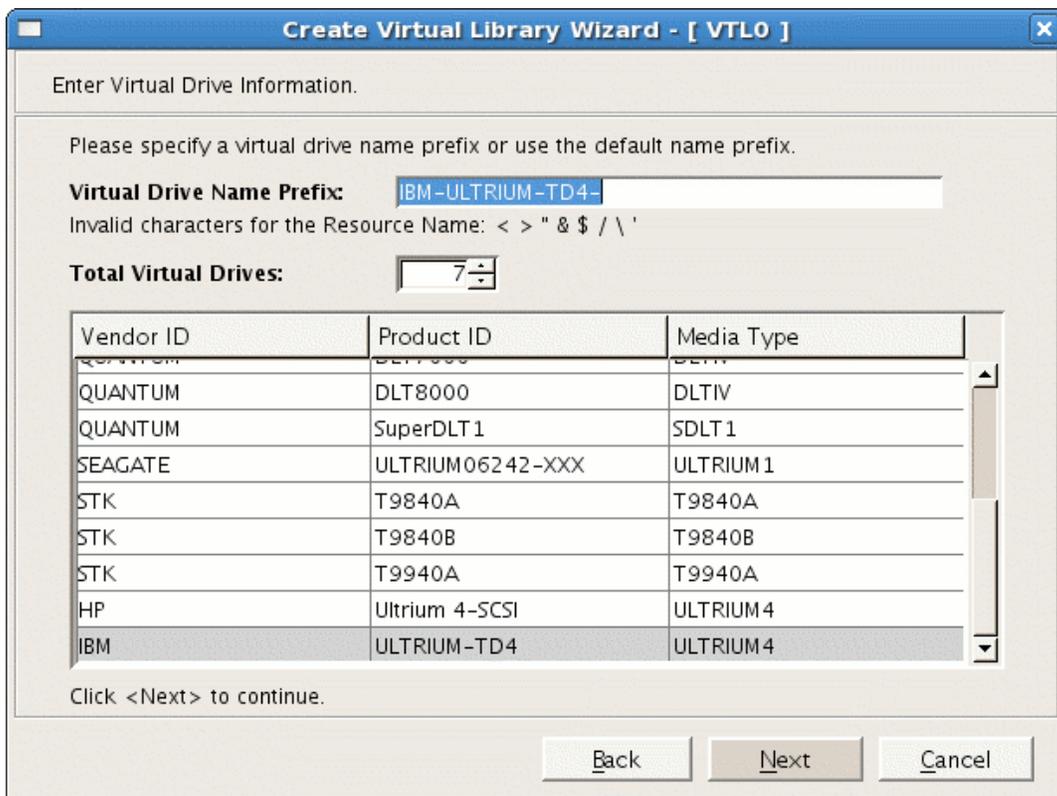


Figure 3-7 Enter Virtual Drive Information

- 5. Do not make any changes on the next two screens:
 - a. Do not check the **Enable Automated Tape Caching** box; just click **Next**.

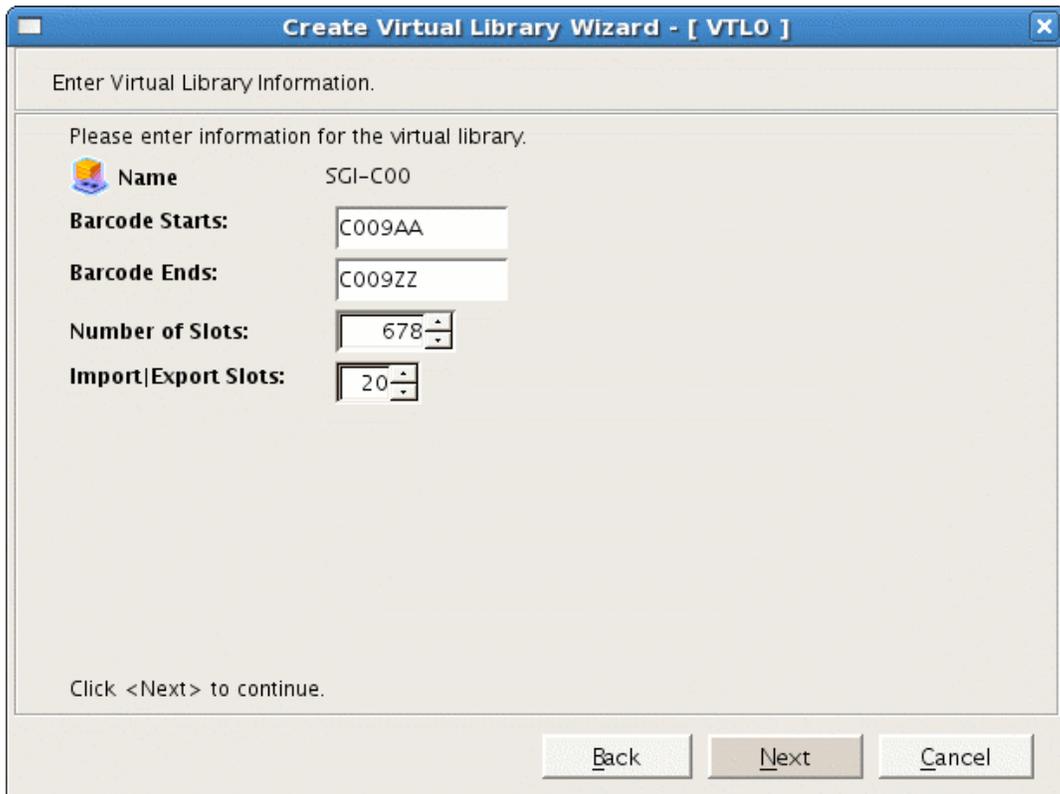


Figure 3-8 Enter the Barcode Information

For the virtual library on the next shelf (cabinet 0 and shelf 1, therefore SGI-C01), you would enter the following barcode information:

C019AA
C019ZZ

Note: Verify that you have used the correct shelf number.

- b. Use the defaults for **Number of Slots** and **Import | Export Slots**.

Note: If you must increase the number of slots, see Appendix A, "Using an Extremely Large Number of Tapes" on page 99.

- c. Click **Next**.
7. Enter the virtual tape properties:
 - a. Do not select **Tape Capacity on Demand**.
 - b. Enter the **Maximum Capacity** tape value from "Determine the Migration Tape Size for the Library" on page 28.
 - c. Click **Next**.
8. Verify that the library information displayed matches what you intended to configure and click **Finish** to complete creation of the library, as shown in Figure 3-9.

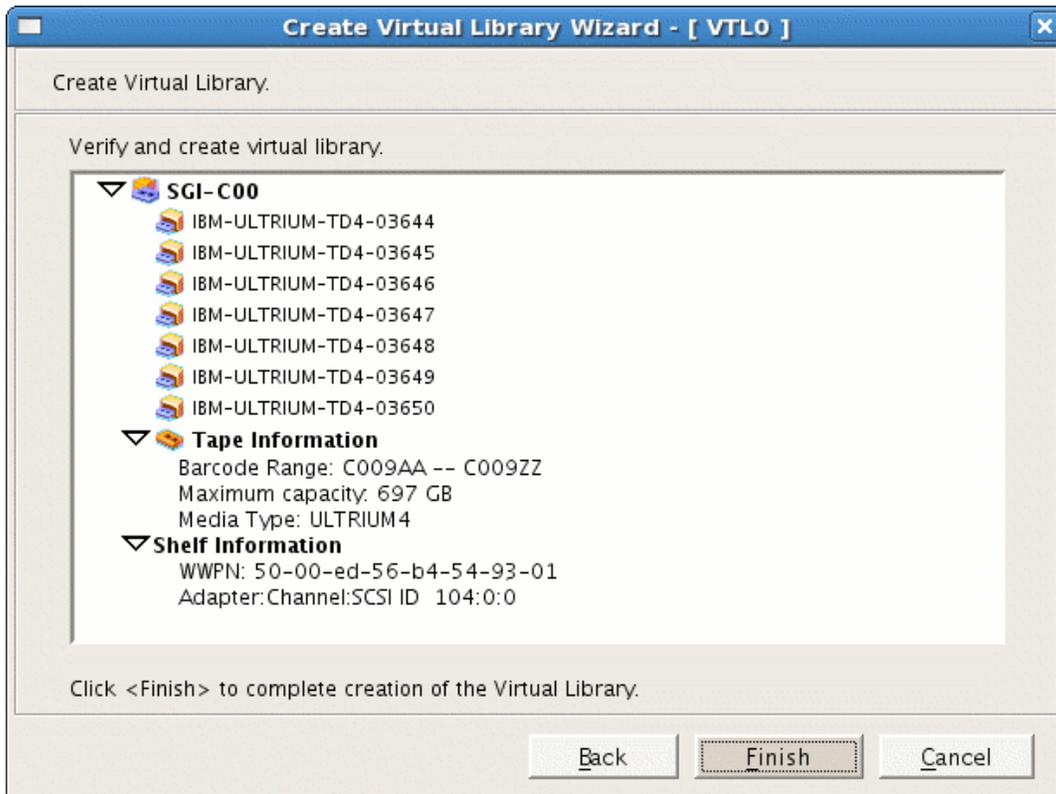


Figure 3-9 Finish Creating the Library

9. Click **Yes** to create the virtual tapes and go to the next section, "Configure Virtual Migration Tapes for the Library" on page 41.

Note: If your site's data would benefit from software compression, you can enable COPAN VTL compression mode (and therefore DMF compression) for each application server (VTL0 and VTL1). See Appendix B, "Enabling Compression " on page 101. However, compression carries an overhead CPU penalty and is not appropriate in all cases.

Configure Virtual Migration Tapes for the Library

This section discusses the following steps:

- "Create Migration Tapes" on page 41
- "Relabel the Migration Tapes" on page 45

Create Migration Tapes

Note: This can be a time-consuming process.

Do the following to create migration tapes for the library:

1. Select the default **Express** method for creating tapes and click **Next**.
2. Click **Next** to accept all of the physical devices (selected by default), as shown in Figure 3-10.

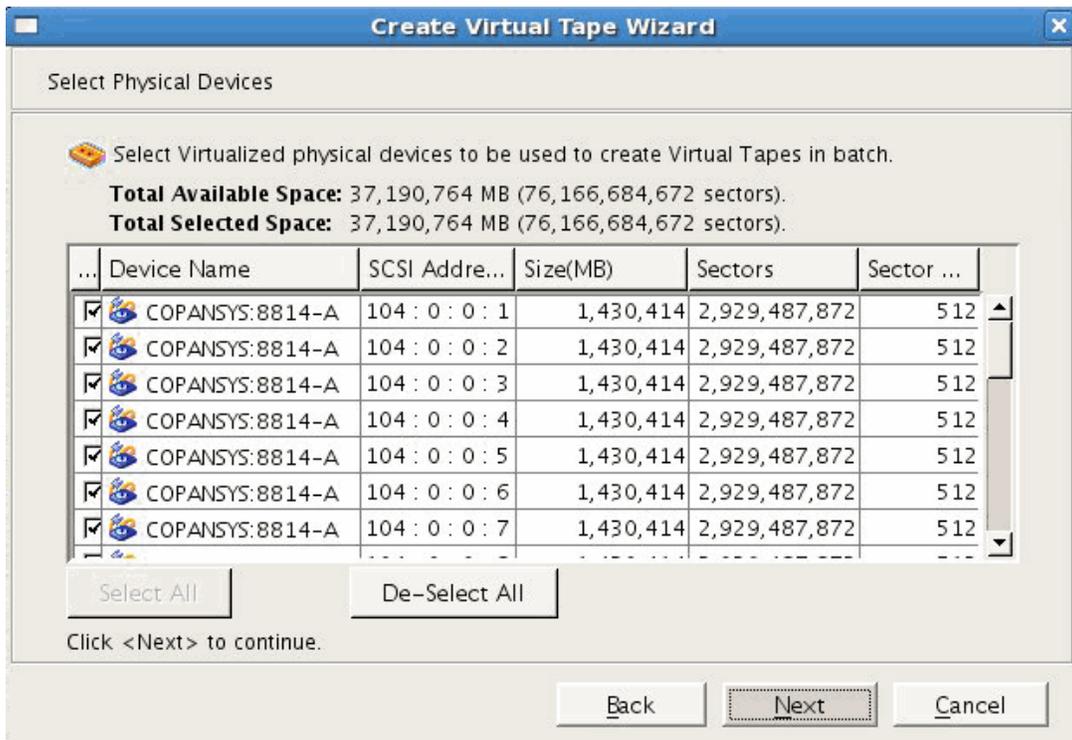


Figure 3-10 Select Physical Devices

3. Enter in the number of tapes to be configured and click **Next**, as shown in Figure 3-11.

Note: This step is creating the actual logical tape volumes on the RAID, which will require that disks be spun up. You cannot enter a number greater than 50. For example, if there are 52 tapes to be configured, you must do them in two groups (such as 2 and 50) by repeating some of these steps.

To use your time efficiently, you may want to create the smaller group first. For example, creating 2 tapes will take a short amount of time because they will fit on the active disk. Creating the remaining 50 tapes will require all of the remaining disks to be spun up, which will take more time.

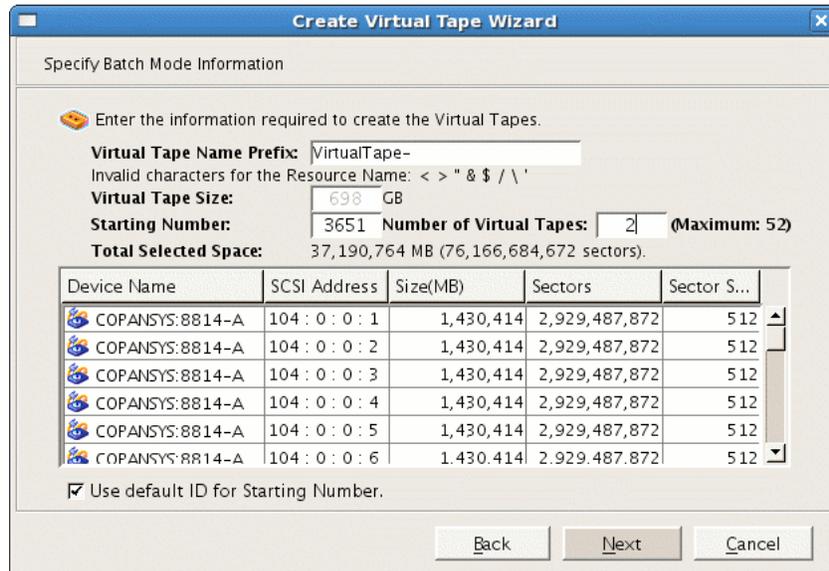


Figure 3-11 Enter the Number of Tapes to Be Configured (Up to 50 at a Time)

- Do not change the **Barcode Starts** information (originally input in step 6a of "Create the Library" on page 31) because the Console will continue from the correct point. Do not click **Use the following barcode range for this batch**.

Click **Next** to select the defaults for the barcode range option.

- Verify the tapes to be created and select **Finish** to create the first group of tapes for this library, as shown in Figure 3-12.

Note: The more tapes created, the longer this step will take. For example, depending upon the disk and power configuration, creating 50 tapes can take more than 15 minutes (during which time there will be no updates displayed).

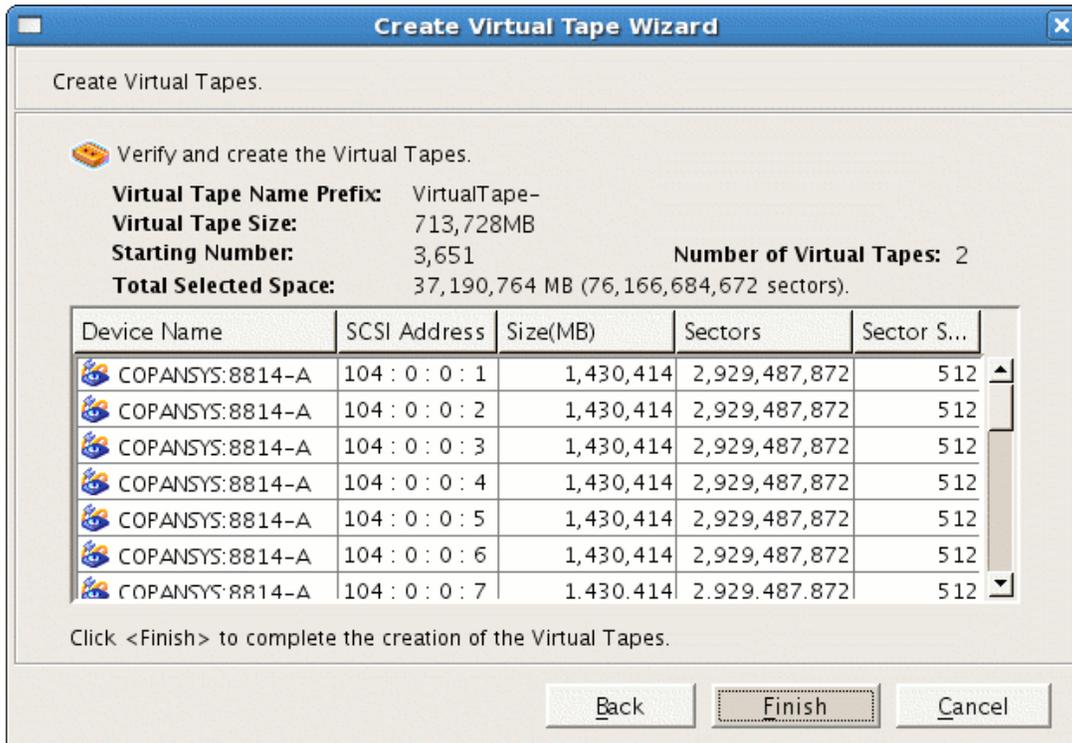


Figure 3-12 Verify and Create Tapes

6. Click **OK** to complete the step.
7. Open the left-hand tree and place the cursor over **Tapes**, such as the following for library SGI-C00:

```

VTLO
  > Virtual Tape Library System
    > Virtual Tape Libraries
      > SGI-C00
        > Tapes
    
```

Right-click and select **New Tape(s)**.

8. Repeat steps 1 through 7 above to create the remaining tapes for this library. (For example, if there are 52 total tapes possible and you entered 2 previously for step 3, enter 50 this time.) The more tapes created, the longer the **Finish** step will take.

Relabel the Migration Tapes

To make the migration tapes ready for use by DMF, you must run a script to relabel each virtual tape's barcode so that it indicates the specific RAID unit in which the tape is stored. (For example, C009AA might be transformed into C00AAA, where the fourth character identifies the RAID unit to DMF.) The DMF library server uses the barcode when picking tapes for writing in order to optimize the shelf's bandwidth.

Do the following:

1. Ensure that there is no other activity on the Console or on the VTL application server that controls the library you have just created (such as VTL0 for library SGI-C00). This is a requirement for the duration of this procedure.
2. Run the `dmreadycopantapes` script on the VTL application server from the `/usr/local/dmf` directory.

Note: This step requires that you previously downloaded the required files from the DMF server to each VTL application server, as specified in "Copy the Support Files to the VTL Application Servers" on page 3.

The script will output an `executed successfully` line for each barcode that is changed. Depending upon the number of tapes and drives, this can be a time-consuming process. For example:

```
[root@VTL0 vtl]# cd /usr/local/dmf
[root@VTL0 dmf]# ./dmreadycopantapes

Command: settapeproperty executed successfully.
...
Command: settapeproperty executed successfully.
[root@VTL0 dmf]#
```

For more information, add the `-v` option.

Free Space in Library SGI-C00 for Dump Tapes

Note: You will only perform this step once, after creating the first library on shelf 0. All of the dump tapes must be on a single shelf. The sample DMF configuration file defines this to be shelf 0. If you want to use a different shelf, you must modify the DMF configuration file drive group and these procedures accordingly.

In this step, you will free disk space from only one library (SGI-C00) so that the space can later be reclaimed for the purpose of dump tapes (which will occur in Chapter 4, "Configure Virtual Dump Tapes" on page 83.) The dump tapes must be on one library only. To avoid problems in case of potential hardware failure, the dump tapes should be spread across the RAID units on the shelf. To make the best use of disk space, the dump tapes should be sized to fit the amount of data needed to accommodate all of the dumps for a day's full backup.

Note: If the dumps for a day's backup require more than one tape, it will increase the complexity and time requirements of restores.

Do the following:

1. Determine how many migration tapes must be deleted in order to free up the required amount of dump space per day that you established in "Determine the Backup Requirements For Your Site" on page 4. Do the following:
 - a. Divide the migration tape size (determined in "Determine the Migration Tape Size for the Library" on page 28) by the dump space needed per day (estimated in "Space Required for the Daily Backup" on page 6) to determine the number of dump tapes that you can create from the space occupied by one migration tape:

$$\text{Migration_Tape_Size} / \text{Dump_Space_Needed_Per_Day} = \#_Dump_Tapes_Per_Migration_Tape$$

For example, suppose you determined that your migration tape size is 698 GB and you estimated that you require 100 GB for each day's dump set. You can therefore make six dump tapes out of each migration tape:

$$698 / 100 = 6.98 \text{ (rounds down to 6 dump tapes per migration tape)}$$

Note: This means that there are 98 GB of unused space that are left on the RAID unit. In step 2 below, you will make use of this space in the final tape size.

- b. Divide the total number of dump tapes required (established in "Number of Dump Tapes Required" on page 6) by the number of dump tapes per migration tape to determine the number of migration tapes to be deleted:

$$\#_Dump_Tapes \ / \ \#_Dump_Tapes_Per_Migration_Tape \ = \ \#_Migration_Tapes_To_Be_Deleted$$

For example, using the default DMF configuration file for COPAN VTL, you will retain the dumps for 28 days (requiring a minimum of 29 tapes). Because you can make 6 dump tapes out of each migration tape, you therefore need to delete 5 migration tapes:

$$29 \ / \ 6 \ = \ 4.83 \ (\text{rounds up to 5 migration tapes to be deleted})$$

Because you must delete 5 migration tapes and you can get 6 dump tapes per migration tape, you will end up with a total of 30 dump tapes, which is 1 greater than the absolute minimum of 29; having an extra dump tape is a good precaution.

2. Determine the size of the dump tape so that it includes the space that was left over after the calculation you made in step 1a above. To do this, divide the amount of space left over in the calculation of the number of dump tapes in step 1a above (in this case, 98 GB) by the number of dump tapes created per migration tape and add it to the original dump space needed per day. This will determine the final dump tape size:

$$Total_Left_Over \ / \ \#_Dump_Tapes_Per_Migration_Tape \ = \ Left_Over_Per_Dump_Tape$$

$$Left_Over_Per_Dump_Tape \ + \ Dump_Space_Needed_Per_Day \ = \ Dump_Tape_Size$$

For example:

$$98 \ / \ 6 \ = \ 16.333333 \ (\text{rounds down to 16})$$

$$16 \ + \ 100 \ = \ 116$$

Take note of the *Dump_Tape_Size* value for use later as the **Maximum Capacity** field in step 2 of "Create Dump Tapes" on page 83.

Note: It is possible to later reclaim more space for dump tapes, as long as there is still space on the shelf. However, it is more complicated. See Appendix C, "Reclaiming Space for Dumps" on page 103.

3. Delete the required number of migration tapes individually, selecting tapes across the RAID set by choosing tapes with barcodes that have different letters of the alphabet for the fourth character (the fourth character specifies the RAID unit). Doing so will reduce the risk due to possible hardware failures.

For example, if you wanted to delete 5 migration tapes, you might choose to delete the following (highlighting the fourth character):

```
C00AAA  
C00DAD  
C00GAG  
C00JAJ  
C00MAM  
  ^
```

To delete a given tape, open the left-hand tree and place the cursor over the library name, such as the following for library SGI-C00:

```
VTLO  
  > Virtual Tape Library System  
    > Virtual Tape Libraries  
      > SGI-C00
```

Right-click and select **Delete Tape(s)**. Then click the boxes for the tapes you want to delete and click **Delete**, as show in Figure 3-13.

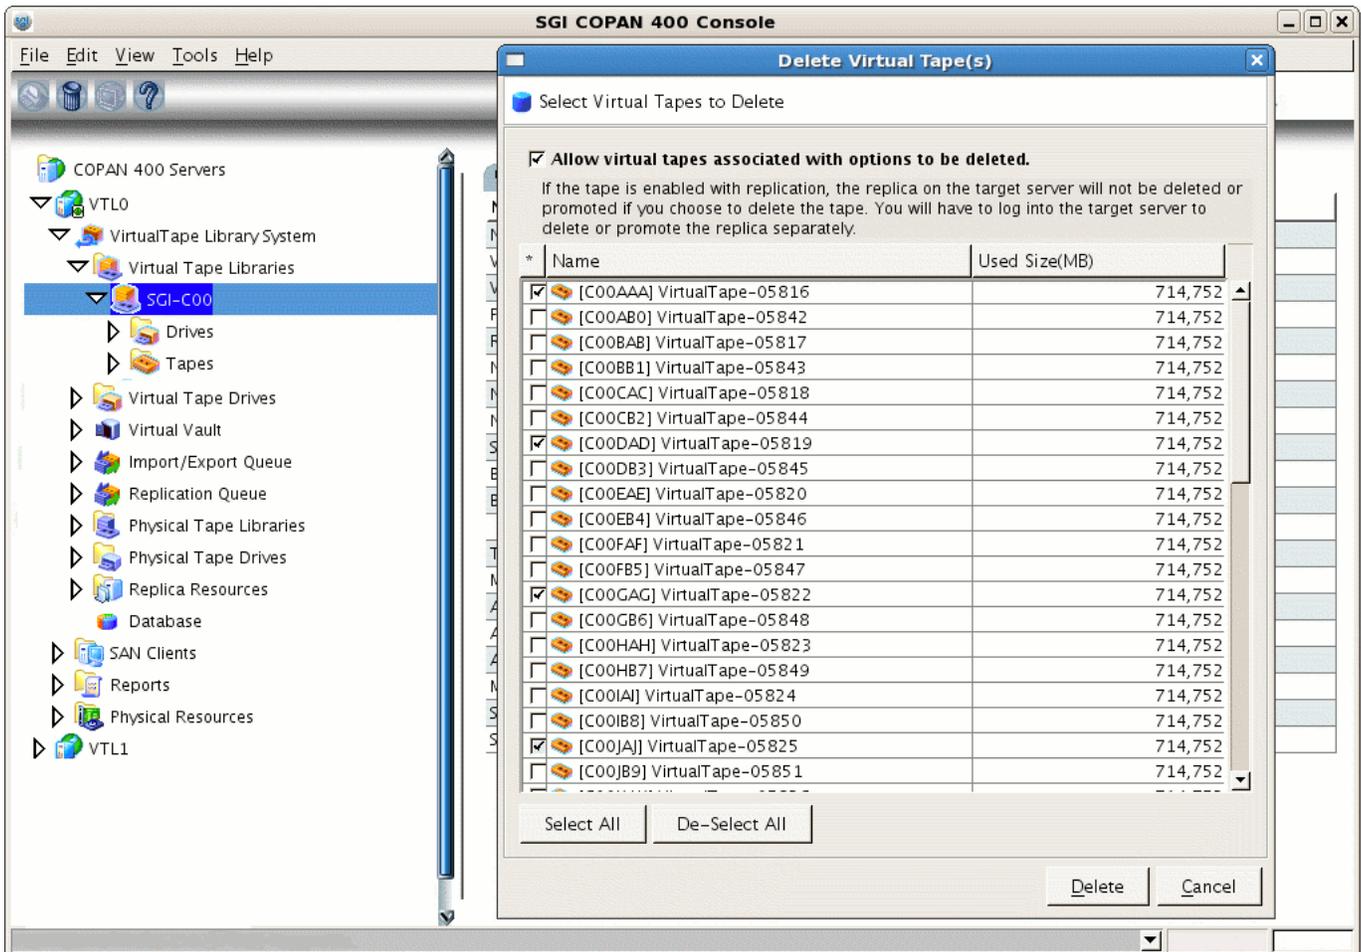


Figure 3-13 Delete Selected Migration Tapes to Free Space Needed for Dumps

In the **WARNING** dialog, type **YES** to confirm that you want to delete the tapes and click **OK**, as shown in Figure 3-14. (There is no data on the tapes at this point, so it is safe to delete them.)

3: Create and Configure Each Virtual Library

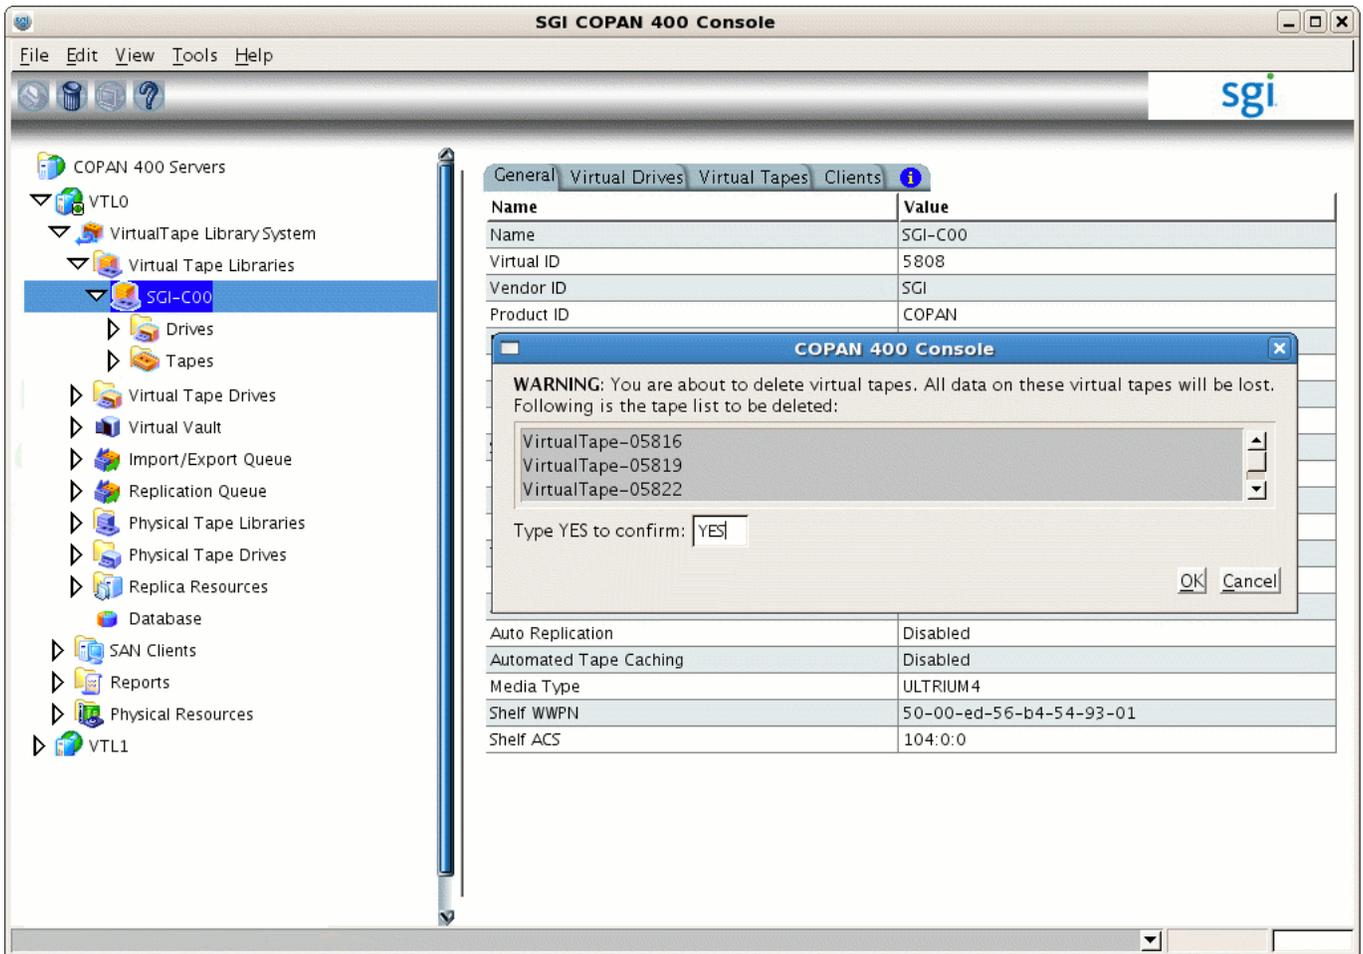


Figure 3-14 Confirm the Deletion of a Tape on SGI-C00

Export Library Access to the DMF Server

This section exports COPAN VTL access to a particular DMF server port via a particular COPAN VTL server port. To export library access, you must do the following:

- Identify the ports you want to connect between the DMF server (the *initiator port*) and the COPAN VTL server (the *target port*). There are four ports available for each VTL server (`vtl0` and `vtl1`); the number of ports available on the DMF server will vary by site.
- Configure a COPAN shelf (such as shelf 0) to the pair of desired initiator/target ports.

Note: For optimum bandwidth, SGI recommends that you configure each COPAN shelf to a unique pair of initiator/target ports. Ideally, each target port on the VTL server should connect to a different initiator port on the DMF server. However, if this is impossible due to insufficient ports on the DMF server, you should configure each shelf individually through a unique target port (rather than configuring multiple shelves on a single target port) in order to use unique initiator/target pairs.

The COPAN cabinet has a built-in zoning capability that lets you control which host ports in the SAN can see which virtual libraries. By default, the libraries are not visible anywhere; you must use the steps in this section to configure each library to accept Fibre Channel commands from only the particular port on the particular host that will be running OpenVault, thereby preventing all other initiator ports from causing problems. Essentially, you are creating a Fibre Channel zone where the only members in the zone are the OpenVault host bus adapter (HBA) and the virtual library.

Note: To accomplish this, you must add your own SAN clients. You should not use the **EveryoneFC** client because it allows every HBA in every host on the Fibre Channel SAN to see the virtual library, which could interfere with legitimate users of the library (for example, by inappropriately rewinding tapes while the legitimate user is writing them).

Do the following:

1. Log in to the DMF server and display the world wide port name (WWPN) of the DMF server port that you want to connect to the COPAN shelf for this library. To do this, view the contents of the appropriate `port_name` file:

```
dmfserver# cat /sys/class/fc_host/port/port_name
```

In this case, suppose you connected DMF server `burn` on port `host5` to COPAN shelf 0 (library `SGI-C00`). To determine the WWPN of `host5`, view the contents of its `port_name` file. For example:

```
burn# cat /sys/class/fc_host/host5/port_name  
0x210100e08b3c337d
```

You will use the WWPN (in this case, `210100e08b3c337d`) later in step 5.

2. In the left-hand panel of the Console, right-click **SAN Clients** and select **Add**.
3. Enter the name of the DMF server in the **Client Name** field, click **Find**, then click **Next**.

Note: If the client WWPN is in a zone, the Console will automatically let you select initiators only from that zone and will skip this step.

4. Select **Fibre Channel** and click **Next**.
5. Select the initiator WWPN that corresponds to the WWPN of the DMF server port that you displayed in step 1 above.

Note: If there is only one initiator WWPN in the client, the Console will automatically select it for you and this dialog will not be displayed.

For example, step 1 displayed `210100e08b3c337d`, so you would check that initiator WWPN line in the Console and click **Next**, as shown in Figure 3-15. Figure 3-16 shows the relationship of the **Initiator WWPN** field to the DMF server port.

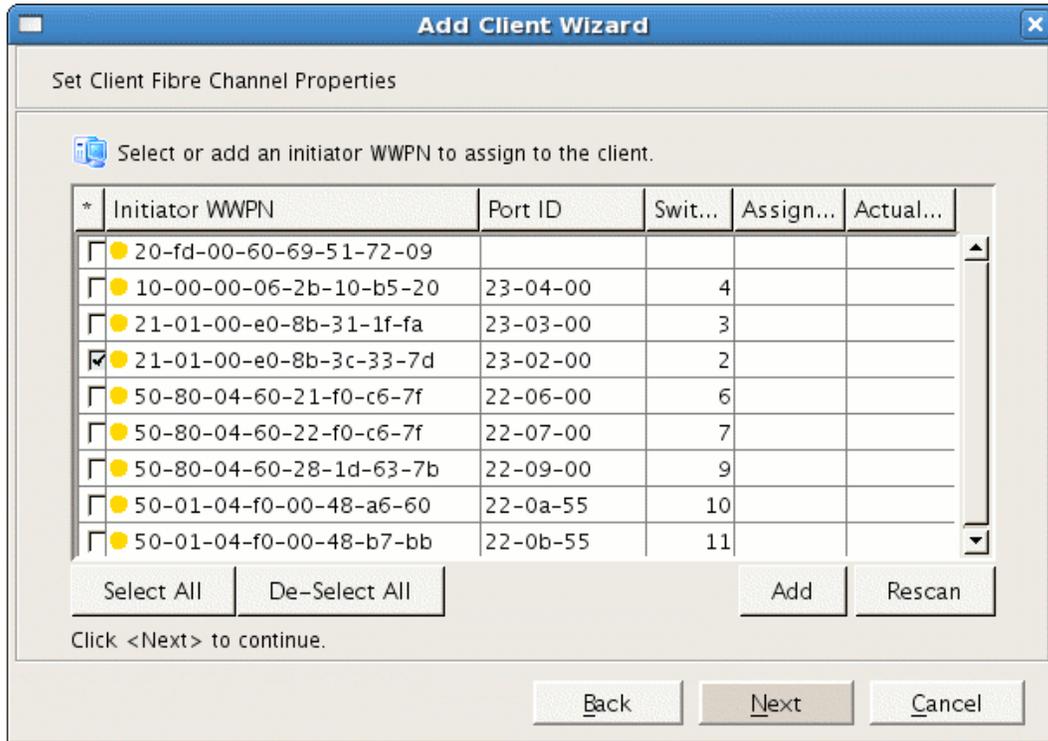


Figure 3-15 Select the Initiator WWPN

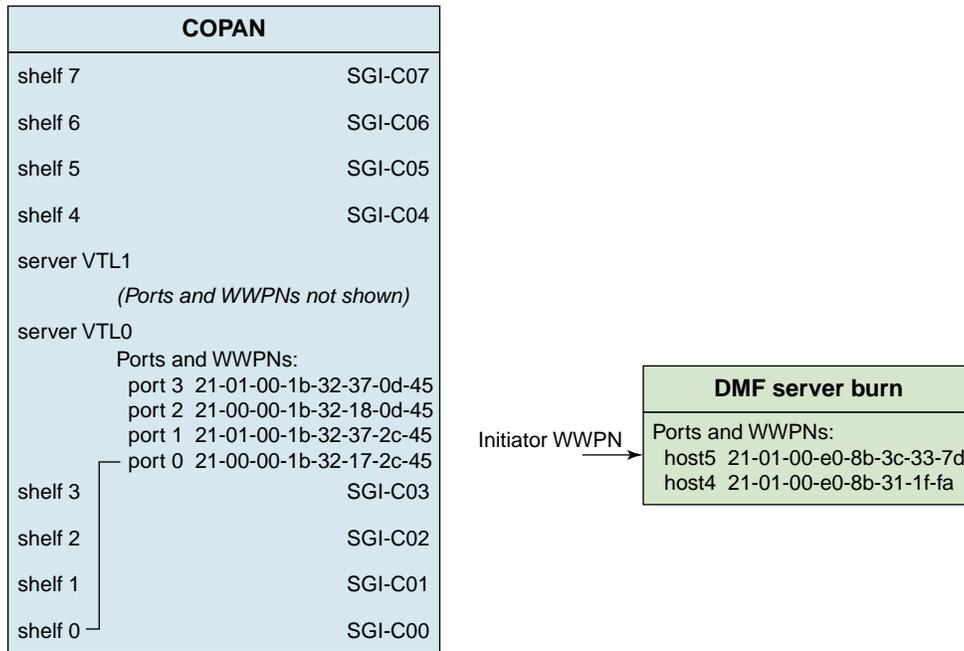


Figure 3-16 Relationship of the "Initiator WWPN" Field to the DMF Server Port

6. Do not check the boxes for **Enable Volume Set Addressing** or **Enable Celerra Support**; just click **Next**.
7. Verify that the client name and initiator WWPN information are as you intended and click **Finish**. Figure 3-17 shows an example.

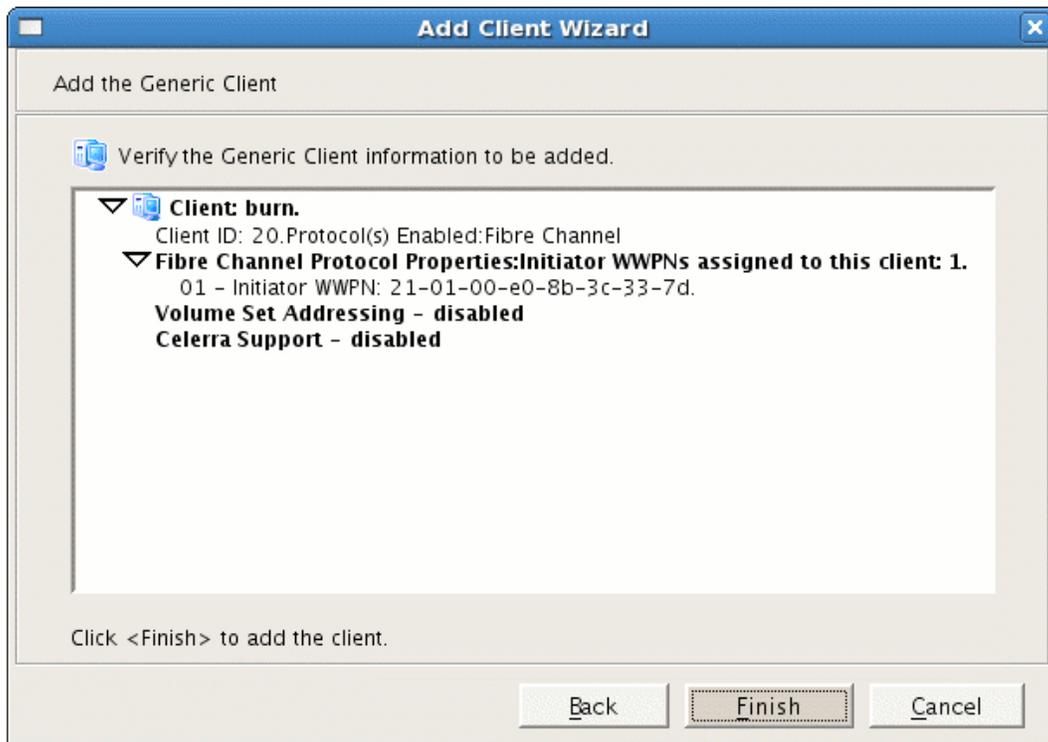


Figure 3-17 Verify the DMF Server as the Client

8. In the left-hand panel of the Console, place the cursor over the name of the DMF server under **SAN Clients**. For example, for DMF server **burn**:

VTLO

> **SAN Clients**
 > **burn**

Right-click and select **Assign**.

9. Select the library name, such as **SGI-C00** for library 0 on shelf 0. (The green dot indicates that the resource is available and has not been assigned to a client.) Click **Next**. Figure 3-18 shows an example for **SGI-C00**. Figure 3-19 shows the relationship of the **Name** field to the COPAN VTL.

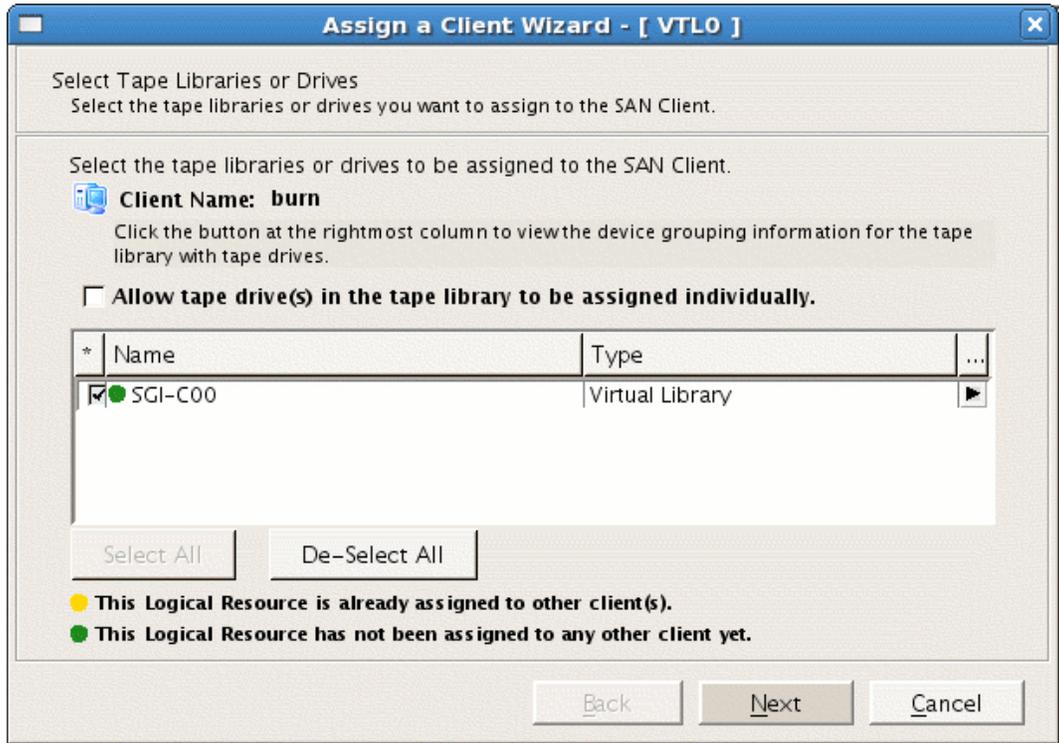


Figure 3-18 Select the Library to Assign to the SAN

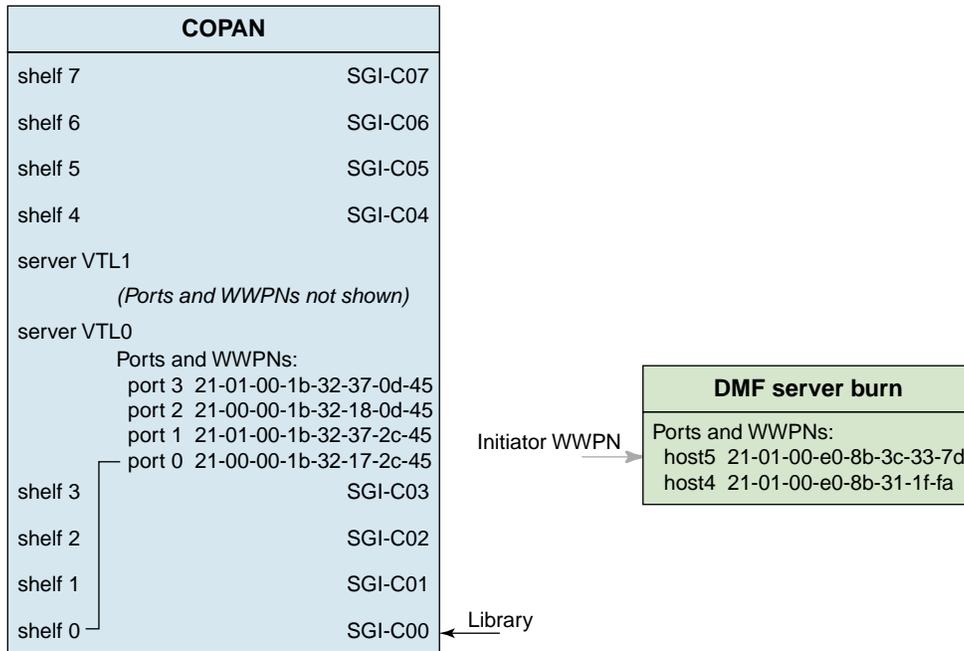


Figure 3-19 Relationship of the "Name" Field to the COPAN VTL

10. Select a WWPN that you want to use for connecting the shelf for this library to the DMF server, as shown in Figure 3-20. Figure 3-21 shows the relationship of the **Target WWPN** field to the COPAN VTL port.

Note: Take note of the WWPN you select here. You will use it later to identify the shelf when configuring OpenVault in step 2 of "Add an LCP for the Library" on page 68.

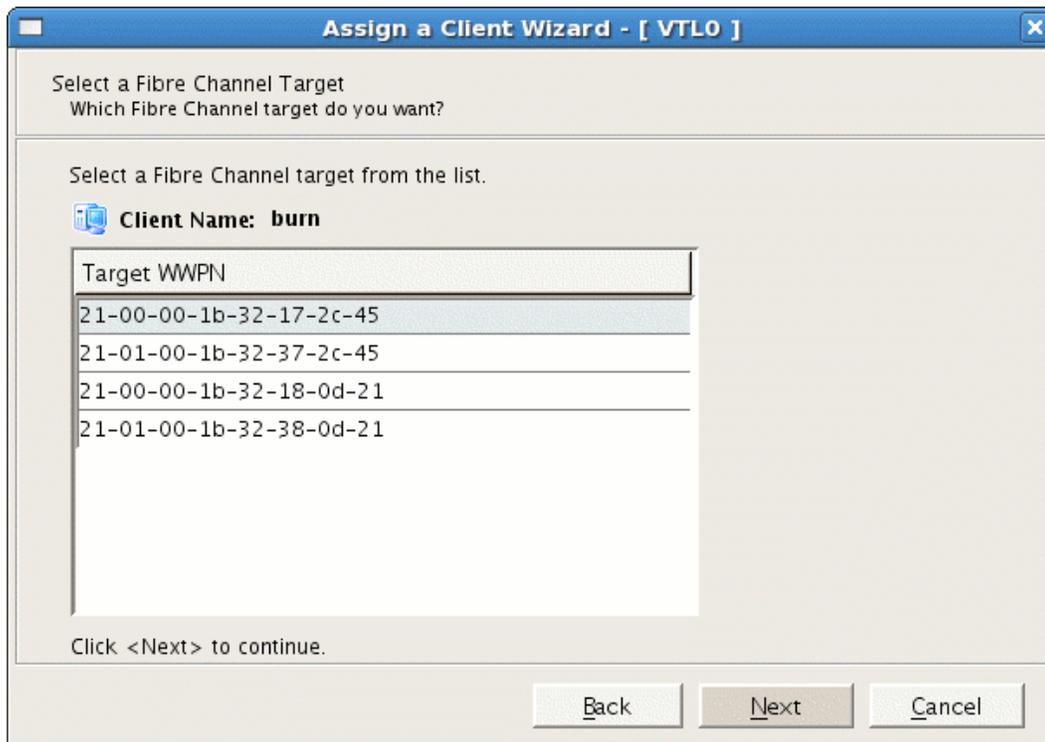


Figure 3-20 Select a Fibre Channel Target

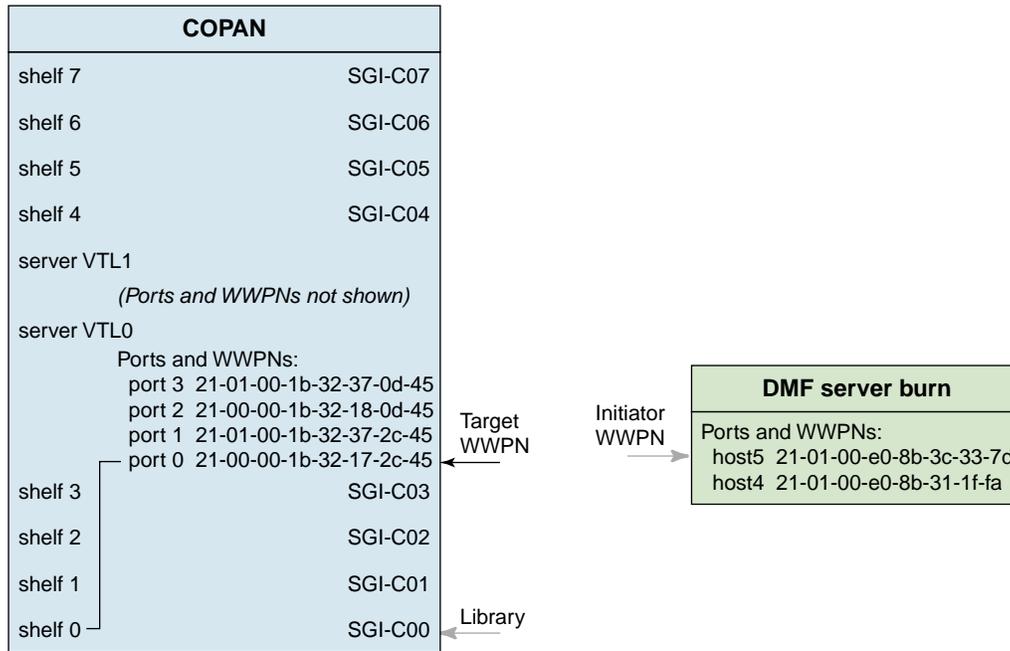


Figure 3-21 Relationship of the **Target WWPN** Field to the COPAN VTL Port

- Verify that the initiator WWPN from the DMF server corresponds to the target WWPN for the correct COPAN shelf. Click **Finish** to complete the configuration. Figure 3-22 shows an example. Figure 3-23 shows the relationships among the library, the DMF server initiator port, and the COPAN VTL target port.

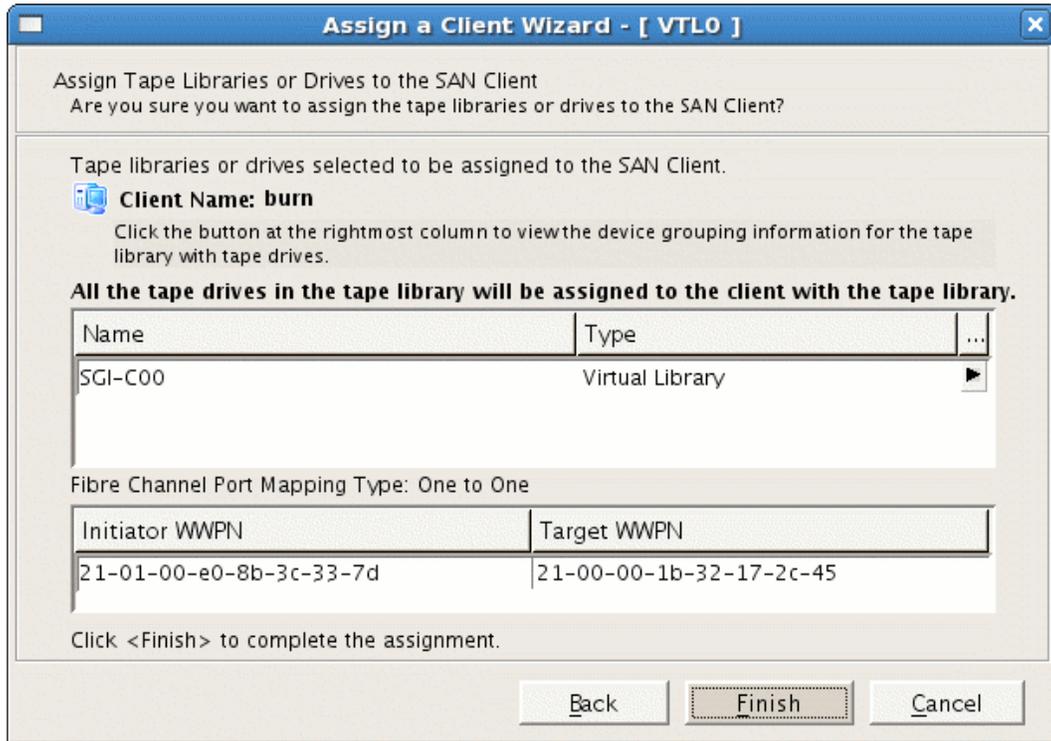


Figure 3-22 Verify that the Initiator and Target WWPNs Correspond

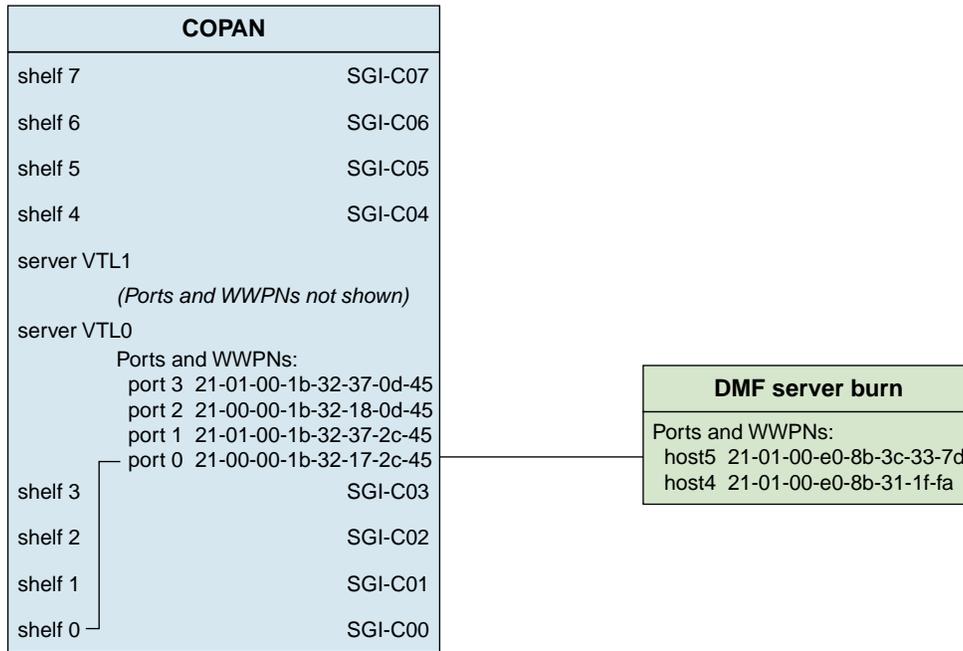


Figure 3-23 Relationships Among the Library, the DMF Server Initiator Port, and the VTL Target Port

- Log in to the DMF server and force the DMF server to scan this port for the new connection:

```
dmfserver# echo "- - -" > /sys/class/scsi_host/port/scan
```

For example, for port host5 on DMF server burn:

```
burn# echo "- - -" > /sys/class/scsi_host/host5/scan
```

- On the DMF server, use the `ts-lsscsi(8)` command to verify that the library is visible on the port:

```
dmfserver# ts-lsscsi
```

For example, the following output shows that the COPAN cabinet and the eight LUNs are visible, and highlights the world wide node name (WWN) and WWPN information that is displayed:

```
burn# ts-lsscsi
[0:0:0:0] disk ATA HDS722580VLSA80 V320 /dev/sda
[1:0:0:0] disk ATA HDS722580VLSA80 V320 /dev/sdb
...
                    WWN                               WWPN
[5:0:0:0] mediumx SGI COPAN          4.50 -          |-----| |-----|
[5:0:0:1] tape IBM ULTRIUM-TD4 4C17 /dev/ts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun1
[5:0:0:2] tape IBM ULTRIUM-TD4 4C17 /dev/ts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun2
[5:0:0:3] tape IBM ULTRIUM-TD4 4C17 /dev/ts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun3
[5:0:0:4] tape IBM ULTRIUM-TD4 4C17 /dev/ts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun4
[5:0:0:5] tape IBM ULTRIUM-TD4 4C17 /dev/ts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun5
[5:0:0:6] tape IBM ULTRIUM-TD4 4C17 /dev/ts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun6
[5:0:0:7] tape IBM ULTRIUM-TD4 4C17 /dev/ts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun7
...
```

Configure OpenVault for the Library

To configure OpenVault for the library, do the following:

- "Add the `dmf` Application to OpenVault" on page 63
- "Add an LCP for the Library" on page 68
- "Add the Set of DCPs for the Library" on page 73
- "Import the Migration Tapes for the Library" on page 78
- "Test that OpenVault Can Mount a Migration Tape from the Library" on page 81

For more details, see *OpenVault Operator's and Administrator's Guide*.

Add the `dmf` Application to OpenVault

Note: You will only perform this step once, when creating the first library. Ensure that OpenVault is not actively being used by other applications, as directed in "Ensure that OpenVault Is Not Active" on page 7.

Do the following to add the `dmf` application to OpenVault and create an unprivileged instance and a privileged instance of it, using the default values except where noted:

1. Log in to the DMF server and invoke the OpenVault administration tool
`ov_admin(8)`:

`dmfserver# ov_admin`
2. Answer the initial questions with the default values.
3. Enter 22 to manage applications.
4. Enter 1 to create a new application.
5. Name the new application `dmf`.
6. Enter 1 to create the `carts` tape (cartridge) group.
7. Enter 1 to create a drive group.
8. Enter the wildcard `*` for the application instance name. (Use the default of unprivileged.)
9. Enter 4 to activate another application instance.
10. Enter 1 to select the application `dmf`.
11. Enter the wildcard `*` for the application instance name.
12. Enter `yes` to make the application privileged.
13. Enter `q` to exit.

3: Create and Configure Each Virtual Library

Following is an example using a server named `burn` as the OpenVault server (the characters `###` in the right margin highlight comments related to the steps above):

```
burn# ov_admin ### STEP 1

    OpenVault Configuration

The general strategy for setting up OpenVault is to

    1) configure the OpenVault server
    2) configure LCP/DCPs on the server machine
    3) configure server for local Applications
    4) if needed, configure server for remote LCPs, DCPs, and Applications
    5) if needed, install and configure LCP/DCPs on remote machines
    6) from the server, for each library setup/import media

Where possible, defaults for each prompt are indicated by [value].
Help text may be obtained by entering '?' at most prompts.

Some menus will present only the available options depending
upon the software, hardware, or options that are installed.
If you do not see the choice you are looking for, double check
your installation to make sure the items are installed.

Press enter to continue...

What is (or will be) the name of the OpenVault server? [burn] ### STEP 2

The OpenVault server is not yet configured; would you like to do so now? [Yes]

What port number should the OpenVault server use? [44444]

What security key would you like the admin commands to use? [none]
Waiting for OpenVault to initialize ...
The OpenVault server was successfully started.

    OpenVault Configuration Menu for server "burn"

    Configuration on Machines Running LCPs and DCPs
        1 - Manage LCPs for locally attached Libraries
        2 - Manage DCPs for locally attached Drives
```

Configuration on Admin-Enabled Machines

- 11 - Manage Cartridge Groups
- 12 - Manage Drive Groups
- 13 - Import Media

Configuration on the OpenVault Server Machine

- 21 - Manage remote Libraries and LCPs
- 22 - Manage Applications
- 23 - Manage OpenVault Client Machines

q - Exit.

Which operation would you like to do: **22**

STEP 3

Manage Applications Menu

- 1 - Create a new Application
- 2 - Delete an Application
- 3 - Show all existing Applications

- 4 - Activate another Application Instance for an existing Application
- 5 - Deactivate an Application Instance
- 6 - Show all activated Application Instances

r - Return to Main Menu.

q - Exit.

Which operation would you like to do: **1**

STEP 4

Enter the name of the Application you want to create [] **dmf**

STEP 5

Select a Cartridge Group to which this Application should be granted access

1 - carts

d - Done (no more selections).

3: Create and Configure Each Virtual Library

Which item would you like to select: 1

STEP 6

What is the priority for this application's use of this Cartridge Group? [1000]

Application "dmf" now has access to Cartridge Group "carts".

Select a Drive Group to which this Application should be granted access

1 - drives

d - Done (no more selections).

Which item would you like to select: 1

STEP 7

What is the unload delay time for this application in this Drive Group? [0]

What is the priority for this application's use of this Drive Group? [1000]

Application "dmf" now has access to Drive Group "drives".

Application dmf was successfully created.

Do you want to activate an Instance of this Application? [Yes]

Enter the name of the Host where an instance of Application "dmf" will run [burn]

Enter the Application's instance name or "*" [] *

STEP 8

Should this Instance of the Application "dmf" be "privileged"? [No]

What security key will the Application use [none]

Unprivileged Instance "*" of Application "dmf"
was successfully activated on "burn".

Press enter to continue...

Manage Applications Menu

1 - Create a new Application

2 - Delete an Application

- 3 - Show all existing Applications
 - 4 - Activate another Application Instance for an existing Application
 - 5 - Deactivate an Application Instance
 - 6 - Show all activated Application Instances
- r - Return to Main Menu.
q - Exit.

Which operation would you like to do: 4

STEP 9

Select the Application for which you want to activate a new Instance

- 1 - dmf
 - 2 - ov_umsh
- r - Return to Previous Menu.
q - Exit.

Which operation would you like to do: 1

STEP 10

Enter the name of the Host where an instance of Application "dmf" will run [burn]

Enter the Application's instance name or "*" [] *

STEP 11

Should this Instance of the Application "dmf" be "privileged"? [No] yes

STEP 12

What security key will the Application use [none]

Privileged Instance "*" of Application "dmf"
was successfully activated on "burn".

Press enter to continue...

Manage Applications Menu

- 1 - Create a new Application
- 2 - Delete an Application
- 3 - Show all existing Applications

3: Create and Configure Each Virtual Library

- 4 - Activate another Application Instance for an existing Application
 - 5 - Deactivate an Application Instance
 - 6 - Show all activated Application Instances
-
- r - Return to Main Menu.
 - q - Exit.

Which operation would you like to do: **q**

STEP 13

Add an LCP for the Library

You must add one library control program (LCP) for each virtual library. Do the following:

1. Stop OpenVault by using the `ov_stop(8)` command:

```
dmfserver# ov_stop
```

2. Discover the device name that maps to the COPAN shelf by examining the output from the following `ov_scandev(8)` command:

```
dmfserver# ov_scandev -p vendor,product,serial -L
```

The WWPN in the output is the WWPN of the shelf assigned in step 10 of "Export Library Access to the DMF Server" on page 51. For example, for the DMF server `burn`, the WWPN `2100001b32172c45` (highlighted here) is shelf 0. This is the device name that you must select later in step 3d. Also note the serial number as well for confirmation in step 3e:

```
burn# ov_scandev -p vendor,product,serial -L
```

```
/dev/tape/by-path/pci-0002:00:02.1-fc-0x2100001b32172c45:0x0000000000000000 SGI COPAN 8VM1008S00
```

```
| _____ |  
|-----|  
WWPN
```

```
| _____ |  
|-----|  
SERIAL NUMBER
```

As you add libraries, they will be reflected in the `ov_scandev` output. For example, the following shows the output after you have added another library (the line ending in `8VM1008S01` highlighted in this example):

```
burn# ov_scandev -p vendor,product,serial -L
/dev/tape/by-path/pci-0002:00:02.1-fc-0x2101001b32372c45:0x0000000000000000 SGI COPAN 8VM1008S01
/dev/tape/by-path/pci-0002:00:02.1-fc-0x2100001b32172c45:0x0000000000000000 SGI COPAN 8VM1008S00
```

3. Use the `ov_admin` command to add the LCP, using the defaults except as noted:

a. Log in to the DMF server and invoke the OpenVault administration tool:

```
dmfserver# ov_admin
```

b. Enter 1 to manage LCPs.

c. Enter 1 to create a new SCSI LCP.

d. For the SCSI library selection, enter the number associated with the device name that corresponds to the library (determined in step 2).

e. Confirm that the serial number (such as `8VM1008S00` indicating shelf 0 and library `SGI-C00`) matches the WWPN of the device (such as `2000001b32172c45`) that was displayed in step 2 above.

f. Enter the device name `c0n` where *n* matches the OpenVault library number, such as `c00` for library `SGI-C00`.

Note: SGI recommends that you use a similar name but varying case to maintain a correspondence between the COPAN VTL view of the library (such as the `C00` in `SGI-C00`) and OpenVault's view of the library (such as `c00`).

This is the value that is used for the `MOUNT_SERVICE_GROUP` parameter in the DMF configuration file. If you use a different naming scheme, you must modify the DMF configuration file. You must use a matching value later in step 3g of "Add the Set of DCPs for the Library" on page 73.

g. Enter the drive names in turn, such as from `c00d1` through `c00d7` for library `SGI-C00`. In a COPAN environment, these names correspond to the logical unit numbers (LUNs) for this library, `lun1` through `lun7`.

h. Enter `q` to exit.

3: Create and Configure Each Virtual Library

For example:

```
burn# ov_admin
```

STEP a

```
What is the name of the OpenVault server? [burn]
```

```
OpenVault Configuration Menu for server "burn"
```

```
Configuration on Machines Running LCPs and DCPs
```

- 1 - Manage LCPs for locally attached Libraries
- 2 - Manage DCPs for locally attached Drives

```
Configuration on Admin-Enabled Machines
```

- 11 - Manage Cartridge Groups
- 12 - Manage Drive Groups
- 13 - Import Media

```
Configuration on the OpenVault Server Machine
```

- 21 - Manage remote Libraries and LCPs
- 22 - Manage Applications
- 23 - Manage OpenVault Client Machines

```
q - Exit.
```

```
Which operation would you like to do: 1
```

STEP b

```
OpenVault LCP Configuration Menu
```

- 1 - Create a new SCSI LCP
- 2 - Create a new network LCP

```
r - Return to Main Menu.
```

```
q - Exit.
```

```
Which operation would you like to do: 1
```

STEP c

```
OpenVault -- SCSI LCP Creation Menu
```

WWPN

```

-----
|                                     |
|                                     |
1 - /dev/tape/by-path/pci-0002:00:02.1-fc-0x2100001b32172c45:0x0000000000000000

- Return to Previous Menu.
q - Exit.

```

For which SCSI library would you like to add a LCP: 1 **### STEP d**

Device information:

```

vendor : SGI
product : COPAN
serial : 8VM1008S00
wnn : 2000001b32172c45

```

STEP e
CONFIRM THAT THIS MATCHES
THE ov_scandev SERIAL NUMBER
IN STEP 2 ABOVE

Enter a name for the device, or <enter> to use the default name [lib1] c00 **### STEP f**
What instance name would you like to give to this LCP? [c00@burn]

What security key would you like to give to this LCP? [none]

What polling interval would you like this LCP to use? [30]

Configuring STK-Iseries at /dev/tape/by-path/pci-0002:00:02.1-fc-0x2100001b32172c45:0x0000000000000000 to be "c00"

What is the default shape of the slots in the library? [LTO]

For the drive at location "bottom drive",

Enter a drive name for the element address "500": c00d1 **### STEP g: lun1**

For the drive at location "2nd drive from bottom",

Enter a drive name for the element address "501": c00d2

For the drive at location "3rd drive from bottom",

Enter a drive name for the element address "502": c00d3

For the drive at location "4th drive from bottom",

Enter a drive name for the element address "503": c00d4

For the drive at location "5th drive from bottom",

Enter a drive name for the element address "504": c00d5

For the drive at location "6th drive from bottom",

Enter a drive name for the element address "505": c00d6

For the drive at location "7th drive from bottom",

Enter a drive name for the element address "506": c00d7

3: Create and Configure Each Virtual Library

LCP Configuration Parameters:

```
Library name           : c00
LCP name               : c00@burn
LCP type               : STK-Lseries
OpenVault Server host name : burn
OpenVault Server port number: 44444
Security key           : none
LCP polling interval   : 30
Number of drives       : 7
Direct SCSI access path : /dev/tape/by-path/pci-0002:00:02.1-fc-0x2100001b32172c45:0x0000000000000000
Default cartridge shape : LTO
```

Drives in the Library

Drive Name	Drive Address
-----	-----
c00d1	500
c00d2	501
c00d3	502
c00d4	503
c00d5	504
c00d6	505
c00d7	506

Create the LCP now? [Yes]

LCP successfully created

Library c00 was successfully created.

OpenVault -- SCSI LCP Creation Menu

- /dev/tape/by-path/pci-0002:00:02.1-fc-0x2100001b32172c45:0x0000000000000000 c00 c00@burn

r - Return to Previous Menu.

q - Exit.

For which SCSI library would you like to add a LCP: q

STEP h

Add the Set of DCPs for the Library

To add the drive control programs (DCPs) for the library, do the following:

1. Stop OpenVault by using the `ov_stop` command:

```
dmfserver# ov_stop
```

2. Review the device name that maps to the COPAN shelf by examining the output from the following `ov_scandev` command:

```
dmfserver# ov_scandev -p vendor,product,serial -L
```

For example, for the DMF server `burn` shelf 0, the WWPN portion of the device name (such as `2100001b32172c45` highlighted in this example) is the device name that you must verify later in step 3d.

```
burn# ov_scandev -p vendor,product,serial -L
/dev/tape/by-path/pci-0002:00:02.1-fc-0x2100001b32172c45:0x0000000000000000 SGI COPAN 8VM1008S00
```

```

|           |
-----
      WWPN

```

3. Add the DCP, using the defaults except as noted:

- a. Invoke the OpenVault administration tool:

```
dmfserver# ov_admin
```

- b. Enter 2 to manage DCPs.
- c. Enter 1 to create a new DCP.
- d. Verify that the WWPN in the device name displayed in the LUNs matches the library for which you want to configure the DCPs, displayed in step 2 above.
- e. Enter the menu selection number for the pathname that corresponds to the drive for which you want to add a DCP. This pathname will include the WWPN noted in step 2 above and will end with a LUN number that corresponds to the drive number, such as `lun1` for drive 1.

Note: This WWPN/LUN name ordering convention is only true for COPAN VTL systems. For physical tape libraries, the WWPN/LUN names will be unique, but not necessarily ordered.

- f. Enter a name for the device that associates it with the library (rather than using the default name), such as `c00d1` for library `SGI-C00`.
- g. Enter a name for the drive group that associates it with the library (rather than using the default name), such as `c00`.

Note: This is the value that is used for the `MOUNT_SERVICE_GROUP` parameter in the DMF configuration file. This value must match the value used earlier in step 3f of "Add an LCP for the Library" on page 68.

- h. Enter `2` to give access to the `dmf` application.
 - i. Enter `d` to complete the drive group definition.
 - j. Repeat steps 3e through 3i for each successive drive group until you have completed the last drive (such as `c00d7`).
 - k. Enter `q` to exit.
4. Restart OpenVault by using the `ov_start(8)`:

```
burn# ov_start
```

For example:

```
burn# ov_admin
```

```
### STEP a
```

```
What is the name of the OpenVault server? [burn]
```

```
OpenVault Configuration Menu for server "burn"
```

```
Configuration on Machines Running LCPs and DCPs
```

- 1 - Manage LCPs for locally attached Libraries
- 2 - Manage DCPs for locally attached Drives

```
Configuration on Admin-Enabled Machines
```

- 11 - Manage Cartridge Groups
- 12 - Manage Drive Groups
- 13 - Import Media

```
Configuration on the OpenVault Server Machine
```

- 21 - Manage remote Libraries and LCPs

- 22 - Manage Applications
- 23 - Manage OpenVault Client Machines

q - Exit.

Which operation would you like to do: **2**

STEP b

OpenVault DCP Configuration Menu

1 - Create a new DCP

r - Return to Main Menu.

q - Exit.

Which operation would you like to do: **1**

STEP c

STEP d

VERIFY THAT THE

WWPN MATCHES THE

ov_scandev OUTPUT

OpenVault -- DCP Creation Menu

WWPN

Pathname	WWPN	Drive
1 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun1		
2 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun2		
3 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun3		
4 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun4		
5 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun5		
6 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun6		
7 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun7		

r - Return to Previous Menu.

q - Exit.

For which Drive would you like to add a DCP: **1**

STEP e

lun1 CORRESPONDS TO DRIVE 1

Device information:

3: Create and Configure Each Virtual Library

Vendor: IBM
Product: ULTRIUM-TD4
Serial Number: 1285424968
DCP Type: Ultrium4
DCP Tape Path: /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun1

Enter a name for the device, or <enter> to use the default name [tapel] **c00d1** **### STEP f**
MATCH THE DRIVE NAME

The following Drive Groups currently exist:

drives

What Drive Group do you want to use (or create)? [drives] **c00** **### STEP g**
ENTER A NAME THAT
ASSOCIATES TO THE
LIBRARY NAME

What is the unload delay time for this Drive Group? [0]

Select an Application which should be granted access to this Drive Group

- 1 - ov_umsh
- 2 - dmf

- d - Done (no more selections).

Which item would you like to select: **2**

STEP h

What is the unload delay time for this application in this Drive Group? [0]

What is the priority for this application's use of this Drive Group? [1000]

Application "dmf" now has access to Drive Group "c00".

Select another Application which should be granted access to this Drive Group

- 1 - ov_umsh

- d - Done (no more selections).

Which item would you like to select: **d**

STEP i

Drive c00d1 was successfully created.

What name would you like to give to this DCP? [c00d1@burn]

OpenVault -- DCP Creation Menu

Pathname	Drive	DCP
- /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun1	c00d1	c00d1@burn
1 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun2		
2 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun3		
3 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun4		
4 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun5		
5 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun6		
6 - /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun7		

r - Return to Previous Menu.

q - Exit.

For which Drive would you like to add a DCP: **1**

STEP j

Device information:

```
Vendor:          IBM
Product:         ULTRIUM-TD4
Serial Number:   1285424969
DCP Type:        Ultrium4
DCP Tape Path:   /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun2
```

Enter a name for the device, or <enter> to use the default name [tape1] **c00d2**

REPEAT THE STEPS

FOR EACH DRIVE

(SUCH AS c00d2-c00d7)

...

Drive c00d7 was successfully created.

What name would you like to give to this DCP? [c00d7@burn]

3: Create and Configure Each Virtual Library

OpenVault -- DCP Creation Menu

Pathname	Drive	DCP
- /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun1	c00d1	c00d1@burn
- /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun2	c00d2	c00d2@burn
- /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun3	c00d3	c00d3@burn
- /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun4	c00d4	c00d4@burn
- /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun5	c00d5	c00d5@burn
- /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun6	c00d6	c00d6@burn
- /dev/pts/pci0002:00:02.1/fc/2000001b32172c45-2100001b32172c45/lun7	c00d7	c00d7@burn

r - Return to Previous Menu.

q - Exit.

For which Drive would you like to add a DCP: **q**

STEP k

Import the Migration Tapes for the Library

Do the following to import the migration tapes for use by OpenVault and DMF:

1. View the available library and drives by using the following `ov_stat(8)` command:

```
dmfserver# ov_stat -ld
```

For example:

```
burn# ov_stat -ld
```

Library Name	Broken	Disabled	State	LCP State
c00	false	false	ready	ready

Drive Name	Group	Access	Broken	Disabled	SoftState	HardState	DCP State	Occupied	Cartridge PCL
c00d1	c00	true	false	false	ready	unloaded	ready	false	
c00d2	c00	true	false	false	ready	unloaded	ready	false	
c00d3	c00	true	false	false	ready	unloaded	ready	false	
c00d4	c00	true	false	false	ready	unloaded	ready	false	
c00d5	c00	true	false	false	ready	unloaded	ready	false	
c00d6	c00	true	false	false	ready	unloaded	ready	false	
c00d7	c00	true	false	false	ready	unloaded	ready	false	

- List the slot information to see all of the virtual tapes that can be imported.

```
dmfserver# ov_stat -L OV_library_name -s
```

The Cart ID field should be blank, indicating that no tapes (whose barcodes are listed in the PCL, *physical cartridge label*, column) have yet been imported. For example:

```
burn# ov_stat -L c00 -s
```

Library Name	Broken	Disabled	State	LCP State
c00	false	false	ready	ready

```
Library: 'c00'
```

Library	Slot Name	Slot Type	Occupied	PCL	Cart ID
c00	slot 1000	LTO	true	C00AAA	
c00	slot 1001	LTO	true	C00BAB	
c00	slot 1002	LTO	true	C00CAC	
c00	slot 1674	LTO	true	C00YT0	
...					
c00	slot 1675	LTO	true	C00ZT1	
c00	slot 1676	LTO	true	C00AT2	
c00	slot 1677	LTO	true	C00BT3	

Library	Bay Name	Slot Type	Total Slots	Free Slots
c00	bay 1	DLT	0	0

- Import the virtual tapes for the library by tape type into OpenVault and add them to DMF according to the DMF volume group (VG) name (such as `vg0` for OpenVault library `c00` and COPAN library `SGI-C00`) by entering the following `dmov_loadtapes(8)` command:

```
dmfserver# dmov_loadtapes -t Ultrium4-800 -l OV_library_name vg_name
```

Note: The tape type `Ultrium4-800` is the name recognized by the `dmov_loadtapes` command for the **IBM ULTRIUM-TD4** tape type. You must enter the tape type on the command line or set the `OV_DEFAULT_CART_TYPE` environment variable.

This command will invoke an editor session. If there are any tapes that you do not want added to the library server database, such as any that should be reserved for use by an application other than DMF, you should delete those barcodes from the list. Otherwise, you should exit the editor.

3: Create and Configure Each Virtual Library

For example, for library SGI-C00, you would enter c00 (the corresponding OpenVault library name) and vg0 (the corresponding VG name for library SGI-C00):

```
burn# dmov_loadtapes -t Ultrium4-800 -l c00 vg0
...
(editor session is invoked)
Unused tapes in library c00.
Delete any you do not wish to use for allocation or volume group vg0.
C00AAA
C00BAB
C00CAC
...
(exit the editor session)
...
(wait a few moments for the process to complete)
...
Loading tapes into allocation/volume group vg0.
Creating Ultrium4-800 cartridges in cartgroup carts for vg0.
```

The tapes for the library are now imported and ready for use. A tape that has been imported into OpenVault can be referred to as a *tape volume*.

4. Verify that the tapes now have OpenVault cartridge IDs assigned to them by examining the output from the following command:

```
dmfserver# ov_stat -L OV_library_name -s
```

For example, the following output shows that the tape with the barcode C00AAA now has an OpenVault cartridge ID of ooA69kzOtNYADeH5:

```
burn# ov_stat -L c00 -s
Library Name  Broken  Disabled  State  LCP State
c00           false   false     ready  ready
Library: 'c00'

Library  Slot Name  Slot Type  Occupied PCL  Cart ID
c00     slot 1000  LTO        true   C00AAA ooA69kzOtNYADeH5
c00     slot 1001  LTO        true   C00BAB ooA69kzOtNcAATXk
c00     slot 1002  LTO        true   C00CAC ooA69kzOtNcAAwqN
...
c00     slot 1675  LTO        true   C00ZT1 ooA69kzOtSkAAQGF
c00     slot 1676  LTO        true   C00AT2 ooA69kzOtSkAAtZU
```

```
c00      slot 1677  LTO      true      C00BT3  ooA69kzOtSkABKsZ
```

Library	Bay Name	Slot Type	Total Slots	Free Slots
c00	bay 1	DLT	0	0

Test that OpenVault Can Mount a Migration Tape from the Library

To test that OpenVault can mount a tape from the library for the `dmf` application, enter the following `ov_mount(8)` command:

```
dmfserver# ov_mount -A dmf -v VSN
```

For example, to test that OpenVault can mount the tape with the VSN (barcode) `C00BAB` and then exit:

```
burn# ov_mount -A dmf -v C00BAB
Mounted C00BAB on /var/opt/openvault/clients/handles//tEyedOqkcssi
burn:/sys/class/fc_host/host5 # exit
exit
```

Repeat the steps in this chapter for each COPAN shelf.

Configure Virtual Dump Tapes

In this chapter, you will use the space in shelf 0 (library SGI-C00) reclaimed in "Free Space in Library SGI-C00 for Dump Tapes" on page 46 to create a set of dump tapes for the DMF system. There will be one set of dump tapes for the entire system, all located on shelf 0.

Note: All of the dump tapes must be on a single shelf. The sample DMF configuration file defines this to be shelf 0. If you want to use a different shelf, you must modify the DMF configuration file drive group and the procedures in this guide accordingly.

This chapter discusses the following:

- "Create Dump Tapes" on page 83
- "Relabel the Dump Tapes" on page 86
- "Import the Dump Tapes into OpenVault" on page 87
- "Test that OpenVault Can Mount a Dump Tape" on page 90

Create Dump Tapes

Note: This can be a time-consuming process.

Do the following:

1. Start the VTL Console as directed in "Subsequently Connecting to the VTL Server" on page 26.
2. Open the left-hand tree and place the cursor over the SGI-C00 library name:

```
VTL0  
  > Virtual Tape Library System  
    > Virtual Tape Libraries  
      > SGI-C00
```

Right-click and select **Properties**, as shown in Figure 4-1.

4: Configure Virtual Dump Tapes

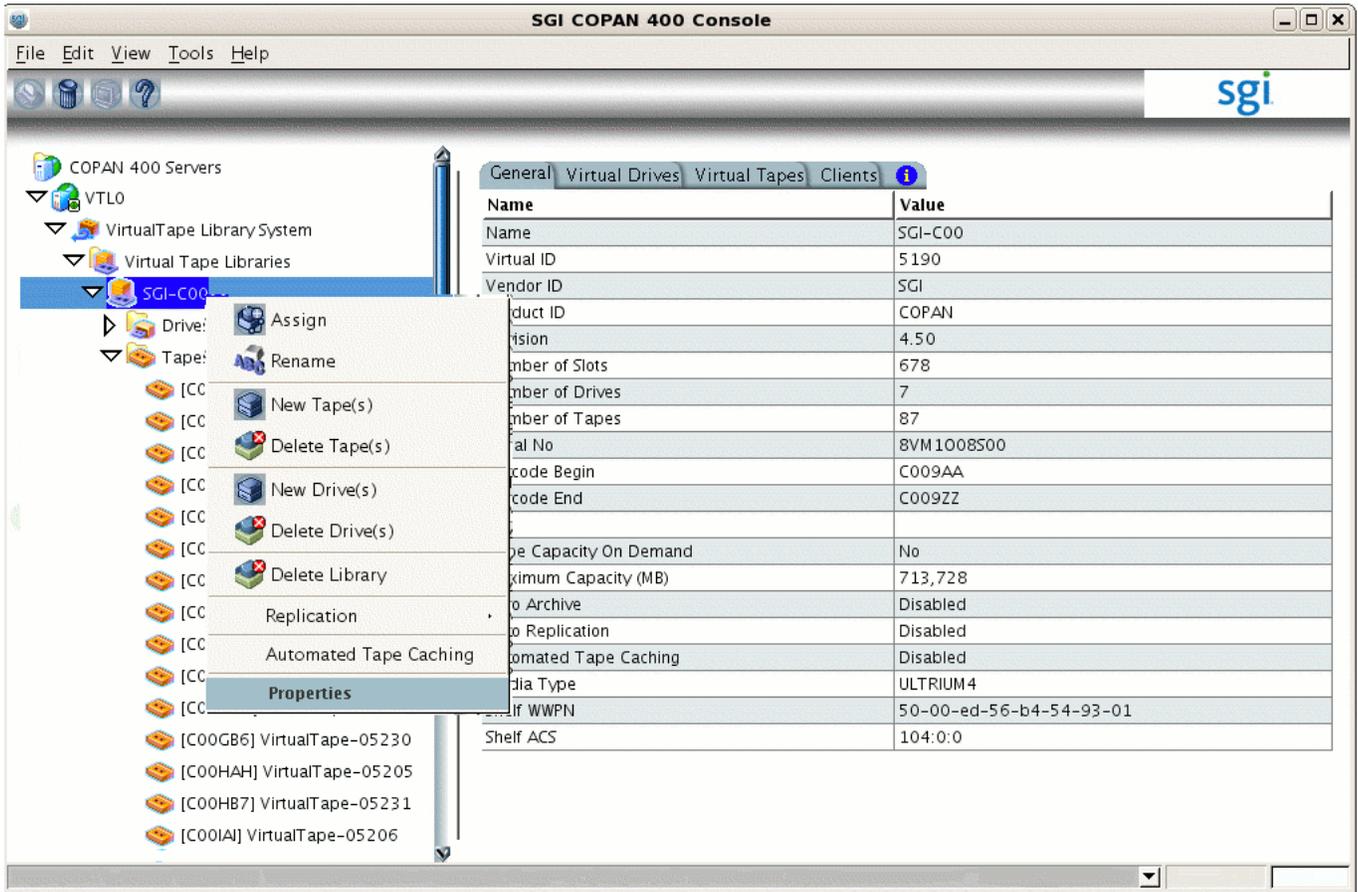


Figure 4-1 Change Tape Properties

Then set the **Maximum Capacity** field in the **Tape Properties** tab to the *Dump_Tape_Size* value you determined in step 2 of "Free Space in Library SGI-C00 for Dump Tapes" on page 46 and click **OK**. For example, Figure 4-2 shows setting the size to be 116 GB for dump tapes.

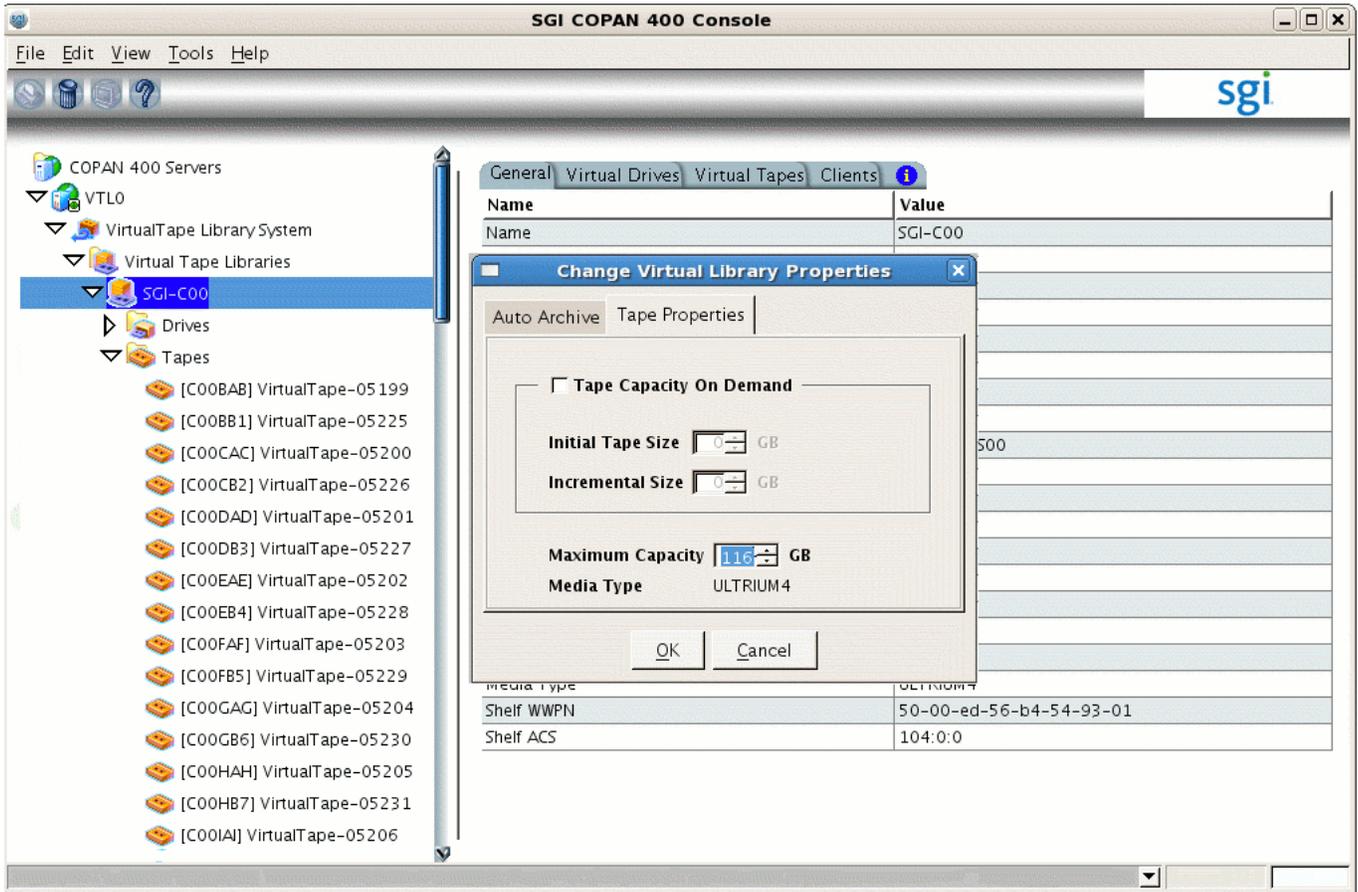


Figure 4-2 Set the Maximum Capacity for Dump Tape Size

3. Place the cursor over the library name, for example:

```
VTL0  
  > Virtual Tape Library System  
    > Virtual Tape Libraries  
      > SGI-C00
```

Right-click and select **New Tape(s)**.

4. Repeat the actions in steps 1 through 8 of "Configure Virtual Migration Tapes for the Library" on page 41 to create the required number of dump tapes.

Relabel the Dump Tapes

To make the virtual tapes created in the previous section ready for use as dump tapes, you must run the `dmreadycopantapes` script to relabel each virtual tape's barcode (*volume serial number, VSN*) so that it indicates the specific RAID unit in which the tape is stored. (For example, `C009AA` might be transformed into `D00AAA`, where the first character `D` indicates that it is a dump tape, and the fourth character identifies the RAID unit to DMF.)

Do the following:

1. Ensure that there is no other activity on the VTL Console or on the VTL application server that controls first library (such as `VTL0` for library `SGI-C00`). This is a requirement for the duration of this procedure.
2. Run the `dmreadycopantapes` script on the VTL application server from the `/usr/local/dmf` directory and provide the library portion of the barcode (the first three characters, such as `C00` in `C00AAA`).

The script will output an `executed successfully` line for each barcode that is changed. Depending upon the number of tapes and drives, this can be a time-consuming process.

For example, for dump tapes created on library SGI-C00, which have barcodes that begin with C00:

```
[root@VTL0 vtl]# cd /usr/local/dmf
[root@VTL0 dmf]# ./dmreadycopantapes -d -l C00

Command: settapeproperty executed successfully.
...
Command: settapeproperty executed successfully.
[root@VTL0 dmf]#
```

For more information, add the `-v` option.

Import the Dump Tapes into OpenVault

Do the following to import the dump tapes for use by OpenVault and DMF:

1. Stop and restart OpenVault in order to refresh the cartridge inventory:

```
dmfserver# ov_stop
dmfserver# ov_start
```

For example:

```
burn# ov_stop
OpenVault clients stopped
Successfully initiated shutdown on OpenVault server burn with the message:
  Shutdown by root
burn# ov_start
OpenVault server started
OpenVault clients started
```

After OpenVault starts, wait a moment for other initialization to fully take place.

4: Configure Virtual Dump Tapes

2. View the available library and drives by using the following `ov_stat(8)` command:

```
burn# ov_stat -ld
```

Library Name	Broken	Disabled	State	LCP State
c00	false	false	ready	ready

Drive Name	Group	Access	Broken	Disabled	SoftState	HardState	DCP State	Occupied	Cartridge PCL
c00d1	c00	true	false	false	ready	unloaded	ready	false	
c00d2	c00	true	false	false	ready	unloaded	ready	false	
c00d3	c00	true	false	false	ready	unloaded	ready	false	
c00d4	c00	true	false	false	ready	unloaded	ready	false	
c00d5	c00	true	false	false	ready	unloaded	ready	false	
c00d6	c00	true	false	false	ready	unloaded	ready	false	
c00d7	c00	true	false	false	ready	unloaded	ready	false	

3. List the slot information to see all of the dump tapes that can be imported:

```
dmfserver# ov_stat -s -L OV_library_name
```

For example, for OpenVault library c00 (COPAN VTL library SGI-C00):

```
burn# ov_stat -s -Lc00
```

Library Name	Broken	Disabled	State	CP State
c00	false	false	ready	ready

```
Library: 'c00'
```

Library	Slot Name	Slot Type	Occupied	PCL	Cart ID
c00	slot 1000	LTO	true	D00ABW	
c00	slot 1001	LTO	true	C00BAB	ooA69k0rR6IACBC+
c00	slot 1002	LTO	true	C00CAC	ooA69k0rR6IACeS1
c00	slot 1003	LTO	true	D00DBX	
c00	slot 1004	LTO	true	C00EAE	ooA69k0rR6IAC71x
c00	slot 1005	LTO	true	C00FAF	ooA69k0rR6IADY40
c00	slot 1006	LTO	true	D00GBY	
c00	slot 1007	LTO	true	C00HAH	ooA69k0rR6MAACDa
c00	slot 1008	LTO	true	C00IAI	ooA69k0rR6MAAfWQ
c00	slot 1009	LTO	true	D00JBZ	

```
...
```

Library	Bay Name	Slot Type	Total Slots	Free Slots
c00	bay 1	DLT	0	0

The above output shows that the dump tape whose PCL column contains the VSN (barcode) D00ABW has not yet been imported into OpenVault, because it has no cartridge ID listed in the Cart ID column. (The VSNs for the migration tapes, such as C00BAB, do have cartridge IDs.)

4. Import the dump tapes for the library by tape type into OpenVault and add them to DMF according to the DMF configuration file `TASK_GROUPS` name by entering the following:

```
dmfserver# dmov_loadtapes -t Ultrium4-800 -l OV_library_name TASK_GROUPS_name
```

This command will invoke an editor session. If there are any tapes that you do not want added to the dump tapes list, such as any that should be reserved for use by an application other than DMF, you should delete those VSNs from the list. Otherwise, you should exit the editor.

For example, for COPAN library SGI-C00, you would enter `c00` (the corresponding OpenVault library name) and `dump_tasks` (the corresponding `TASK_GROUPS` name from the sample DMF configuration file for COPAN VTL use):

```
burn# dmov_loadtapes -t Ultrium4-800 -l c00 dump_tasks
...
(editor session is invoked)
Unused tapes in library c00.
Delete any you do not wish to use for task group dump_tasks.
D00ABW
D00DBX
D00GBY
...
(exit the editor session)
...
(wait a few moments for the process to complete)
...
Loading tapes into /dmf/home/dump_tasks/tapes for task group dump_tasks.
Creating Ultrium4-800 cartridges in cartgroup carts for dump_tasks.
```

The dump tapes for the library are now imported and ready for use.

5. Verify that the dump tapes now have OpenVault cartridge IDs assigned to them by examining the output from the following command:

```
dmfserver# ov_stat -s -L OV_library_name
```

4: Configure Virtual Dump Tapes

For example, the following output shows that the dump tape with the VSN D00ABW in the PCL column now has an OpenVault cartridge ID of ooA69k0sSawABQWg:

```
burn# ov_stat -s -L c00
```

Library Name	Broken	Disabled	State	LCP State
c00	false	false	ready	ready

```
Library: 'c00'
```

Library	Slot Name	Slot Type	Occupied	PCL	Cart ID
c00	slot 1000	LTO	true	D00ABW	ooA69k0sSawABQWg
c00	slot 1001	LTO	true	C00BAB	ooA69k0rR6IACBC+
c00	slot 1002	LTO	true	C00CAC	ooA69k0rR6IACeS1
c00	slot 1003	LTO	true	C00BAB	ooA69k0rR6IACBC+
c00	slot 1002	LTO	true	D00DBX	ooA69k0sSawABtiq
c00	slot 1004	LTO	true	C00EAE	ooA69k0rR6IAC71x
c00	slot 1005	LTO	true	C00FAF	ooA69k0rR6IADY40
c00	slot 1006	LTO	true	D00GBY	ooA69k0sSawACK2A
c00	slot 1007	LTO	true	C00HAH	ooA69k0rR6MAACDa
c00	slot 1008	LTO	true	C00IAI	ooA69k0rR6MAAfWQ
c00	slot 1009	LTO	true	D00JBZ	ooA69k0sSawACoJB

```
...
```

Library	Bay Name	Slot Type	Total Slots	Free Slots
c00	bay 1	DLT	0	0

Test that OpenVault Can Mount a Dump Tape

To test that OpenVault can mount a dump tape from the library for the `dmf` application, enter the following:

```
dmfserver# ov_mount -A dmf -v VSN
```

For example, to test that OpenVault can mount the tape with the VSN (barcode) D00ABW and then exit:

```
burn# ov_mount -A dmf -v D00ABW
Mounted D00ABW on /var/opt/openvault/clients/handles//3yhZogXOqM4P
burn:/sys/class/fc_host/host5 # exit
exit
```

Test the DMF System

This chapter describes how to test the DMF system:

- "Validate the DMF Configuration" on page 91
- "Enable Audits of the DMF-Managed Filesystems" on page 92
- "Test the DMF Configuration" on page 96

Validate the DMF Configuration

To verify the DMF configuration after the tapes have been created and imported into OpenVault, repeat the validation check in DMF Manager (as in step 5 of "Create the DMF Configuration File" on page 13) by right-clicking anywhere within the **Overview** panel and selecting:

Configure
 > Validate Configuration

You could instead run the `dmcheck(8)` command on the DMF server. There should not be any errors or warnings. For example:

```
burn# dmcheck

Checking DMF installation.
  Linux burn 2.6.32.23-0.3-default #1 SMP 2010-10-07 14:57:45 +0200 ia64 ia64 ia64 GNU/Linux -
dmfserver
  SuSE-release: SUSE Linux Enterprise Server 11 (ia64)
  SuSE-release: VERSION = 11
  SuSE-release: PATCHLEVEL = 1
  sgi-issp-release:      SGI InfiniteStorage Software Platform, version 2.2, Build
702rp41.sles11-1101052113
  sgi-foundation-release:      SGI Foundation Software 2.2, Build 702rp41.sles11-1101052113
  lsb-release:
LSB_VERSION="core-2.0-noarch:core-3.2-noarch:core-4.0-noarch:core-2.0-ia64:core-3.2-ia64:core-4.0-ia64"
  DMF version 5.4.0-0 rpm dmf-5.4.0-0 installed.

Checking DMF config file
  Scanning for non-comment lines outside define/endif pairs
```

5: Test the DMF System

```
Scanning for DMF parameters without values
Checking all objects for invalid names
Checking base
Checking daemon
Checking policy space_policy
Checking policy copan_policy
Checking filesystem /dmi_fs
Checking Library Server vtl_ls
Checking Drive Group dg0
Checking Volume Group vg0
Checking Migrate Group mg0
Checking selection rules in policy space_policy.
Checking selection rules in policy copan_policy.
Checking Task Group daemon_tasks
Checking Task Group dump_tasks
Checking Task Group ls_tasks
Checking for unreferenced objects
Cross-checking LSs and task groups for duplicate VSNs

Checking other daemons.
  Checking OpenVault
  Checking chkconfig

No Errors found.
No warnings found.
```

If there are any errors or warnings, fix them and then rerun the validation. For more information, see the *DMF 5 Administrator's Guide for SGI InfiniteStorage*.

Enable Audits of the DMF-Managed Filesystems

The DMF configuration file for COPAN VTL performs a nightly audit at 23:00 to check for database consistencies. To enable these audits of the DMF-managed filesystems, you must initialize the `dmaudit(8)` working environment. For more information about `dmaudit`, see *DMF 5 Filesystem Audit Guide for SGI InfiniteStorage*.

Do the following:

1. Start the DMF service:

```
dmfserver# service dmf start
```

2. Run the `dmaudit(8)` command to verify the filesystems:

```
dmfserver# dmaudit
```

In particular, set up the file system scan list and run a simple snapshot.

3. Enter `edit` to edit a fresh copy of the filesystem scan list.
4. Delete the `/dcmmssp` and `/dmf/move` filesystems, leaving just your DMF-managed filesystem (such as `/myfs`).
5. Enter `accept`.
6. Enter `snapshot`.
7. Enter `quit`.

For example, on DMF server `burn` (the characters `###` in the right margin highlight comments related to the steps above):

```
burn# dmaudit
```

```
This program must create a working directory named 'working_dir' to hold
several very large work files.  The files may be needed in subsequent
executions of this program, so the directory should be placed in a file system
that is not cleared frequently.
```

```
Please enter the full path name of an existing directory in which subdirectory
'working_dir' can be created (<CR> to quit): /dmf/home
```

```
You must select the file systems to be scanned when this program searches for
migrated files.  By default the list contains all file systems currently
mounted.
```

```
IF THERE ARE ANY FILE SYSTEMS CONTAINING MIGRATED FILES THAT DO NOT APPEAR IN
THIS LIST, EXIT THIS PROGRAM AND MOUNT THEM BEFORE CONTINUING!!!
```

```
Failure to do so could mean the loss of the data in those files, because this
program sometimes removes database entries if it cannot find matching migrated
files for them.  File systems that you are sure do not contain migrated files
may be removed from this list to speed execution.  Remember that using restore
to load files dumped from a DMF-configured file system can result in migrated
files in other file systems.  If there is any question whether a file system
contains migrated files, leave it in the list.
```

5: Test the DMF System

Select:

<view> View the current file system scan list
<edit> Edit a fresh copy of the file system scan list
<accept> Accept the current file system scan list
<quit> Quit

Please enter your selection: **edit**

STEP 3

/dcmmssp
/dmf/move
/myfs

Delete /dcmmssp and /dmf/move

STEP 4

/dmi_fs

Select:

<view> View the current file system scan list
<edit> Edit a fresh copy of the file system scan list
<accept> Accept the current file system scan list
<quit> Quit

Please enter your selection: **accept**

STEP 5

MAIN MENU

Select:

<snapshot> Take a snapshot and report status of file systems and databases
<config> Examine or modify configuration information
<quit> Quit

Please enter your selection: **snapshot**

STEP 6

DAEMON DATABASE ERROR REPORT

No errors were discovered comparing the file systems against the daemon database.

DATA MIGRATION CONFIGURATION

```
-----  
Data migration home directory:      /dmf/home  
Data migration binaries directory:  /usr/sbin  
  
Server name:                        daemon  
Server home directory:              /dmf/home/daemon  
Server spool directory:              /dmf/spool/daemon  
  
Data migration daemon process ID:   19275
```

No MSPs are configured

```
Name          Type  
-----  
vtl_ls        dmatls  
vg0           volume group  in Library Server vtl_ls  
vg1           volume group  in Library Server vtl_ls  
vg2           volume group  in Library Server vtl_ls  
vg3           volume group  in Library Server vtl_ls  
vg4           volume group  in Library Server vtl_ls  
vg5           volume group  in Library Server vtl_ls  
vg6           volume group  in Library Server vtl_ls  
vg7           volume group  in Library Server vtl_ls  
mg0           migrate group Group Members: vg0  
mg1           migrate group Group Members: vg1
```

LIST OF FILE SYSTEMS SCANNED

```
-----  
/myfs  xfs
```

MAIN MENU

```
-----  
Select:
```

```
<inspect>  Inspect and correct file system and database errors  
<report>   Reprint status report for the current snapshot  
<verifymsp> Check the dmatls tape library server databases against the
```

```
daemon databases
<snapshot> Take a snapshot and report status of file systems and
databases
<free> Release all file space used by the current snapshot
<config> Examine or modify configuration information
<quit> Quit
```

Please enter your selection: **quit**

STEP 7

Test the DMF Configuration

To test the completed DMF configuration, do the following from the DMF server:

1. Change to a DMF-managed filesystem directory and create a test file of at least 1 MB. For example, to create the file `testfile` in the filesystem `/dmi_fs` on the DMF server burn:

```
burn# cd /dmi_fs
burn# /usr/lib/dmf/support/dmtwf -l 1m testfile
```

2. List the DMF status of the test file by using the `dmls(1)` command, which should show that the file is a regular (REG) file. For example, from the DMF server burn:

```
burn# dmls -l
total 980
-rw-r--r-- 1 root      root      1000000 2010-11-05 12:36 (REG) testfile
```

3. Migrate the file and release its data blocks after the offline copies are made by using the `dmp(1)` command:

```
burn# dmp -r testfile
```

4. Idle the DMF daemon so that the `dmp` request will take place immediately by using the `dmdidle(8)` command:

```
burn# dmdidle
```

5. List the progressing status of the file by executing the `dmls` command multiple times:

```
burn# dmls -l
```

For example, the following shows that `testfile` moves from migrating (MIG) to offline (OFF):

```
burn# dmfs -l
total 980
-rw-r--r--  1 root      root      1000000 2010-11-05 12:36 (MIG) testfile
burn#
burn# dmfs -l
total 980
-rw-r--r--  1 root      root      1000000 2010-11-05 12:36 (OFL) testfile
```

6. Delete the test file. For example:

```
burn# rm testfile
```


Using an Extremely Large Number of Tapes

This appendix discusses the following:

- "Number of Slots" on page 99
- "Creating Tapes and Relabeling Barcodes in Batches" on page 99

Number of Slots

There must be at least as many slots as there are virtual tapes. By default, the VTL Console provides 678 slots for virtual tapes. For most sites, this is a sufficient number. However, if you want a greater number of tapes, you must adjust the **Number of Slots** field in step 6 of "Create the Library" on page 31 accordingly. You must adjust this number the first time that you create tapes for the library, because you cannot modify the slot number later. The maximum number of slots is 4096.

Creating Tapes and Relabeling Barcodes in Batches

The algorithm used to relabel the barcodes so that they refer to the specific RAID unit allows for up to 1,296 tapes per RAID unit (which is 33,696 tapes per shelf, because there are 26 RAID units per shelf). For most sites, this is a more than sufficient number. However, if you want an extremely large number of tapes, you must adjust the number of slots as mentioned above and create the tapes in multiple batches, running the `dmreadycopantapes` script ("Relabel the Migration Tapes" on page 45) on the first batch before creating the second batch.

Note: You must adjust the slot number when creating the first batch of tapes; after the first batch has been created, you can no longer adjust the slot number.

Enabling Compression

If your site's data would benefit from software compression, you can enable COPAN VTL compression mode (and therefore DMF compression) for each application server (VTL0 and VTL1).

Note: Compression carries an overhead CPU penalty and is not appropriate in all cases.

Do the following:

1. Open the left-hand tree and place the cursor over **Virtual Tape Library System**.
For example, for VTL0:

VTL0

> **Virtual Tape Library System**

Right-click and select **Properties**.

2. Check the **Enable Virtual Tape Library compression mode** box, select **Software**, use the default threshold value, and click **OK**. Figure B-1 shows an example.

B: Enabling Compression

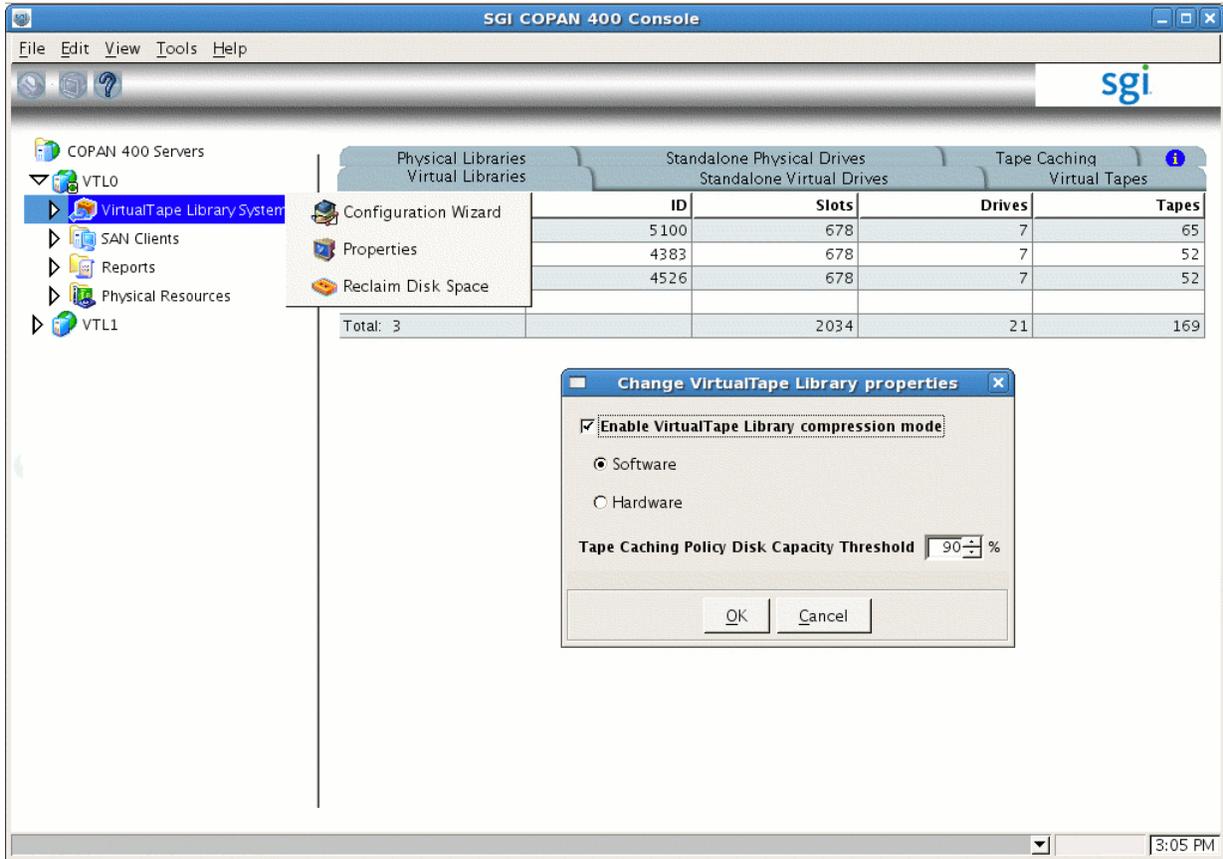


Figure B-1 Enabling Compression

Reclaiming Space for Dumps

If you do not have enough space designated in dump tapes for your backup requirements, you can do the following to reclaim space from an empty migration tape:

1. Verify that the migration tape it is empty by examining the output from the `dmvoladm(8)` command on the DMF server, specifying the volume serial number (VSN, which is the same as the barcode) for the tape:

```
dmfserver# dmvoladm -c "list vsn=VSN"
```

The `DATA LEFT` field should show that there is no data on the tape (0.000000), as in the following example for the migration tape with VSN C00SAW and DMF server burn:

```
burn# dmvoladm -c "list vsn=C00SAW"
-----
VSN          VOLGRP LB      DATA LEFT      DATA  EOT  EOT          WR/FR
WRITTEN  CHUNK  ZONE  HFLAGS          AGE
-----
C00SAW      vg0  al      0.000000      0.000000      1    1  -----      12m
Database was not modified.
```

2. Lock the tape by setting the operator hold flag to on, which means that it cannot be used for migrating data:

```
dmfserver# dmvoladm -c "update VSN hoa on"
```

For example:

```
burn# dmvoladm -c "update C00SAW hoa on"
Updated 1 record.
```

3. Verify that the tape is not already mounted by verifying that it does not show up in OpenVault status output by using the `ov_stat(8)` command:

```
dmfserver# ov_stat -ld | grep VSN
```

For example:

```
burn# ov_stat -ld | grep C00SAW
burn#
```

If the VSN does appear in the `grep` output, wait for the tape to unmount before continuing on to the next step. It can take up to 10 minutes for the unmount to complete.

4. Reconfirm that the migration tape it is still empty and that it is now locked:

```
dmfserver# dmvoladm -c "list vsn=VSN"
```

The DATA LEFT field should still show that there is no data on the tape (0.000000), and the `o` hold flag should appear in the HFLAGS field, as in the following example:

```
burn# dmvoladm -c "list vsn=C00SAW"
          DATA    EOT    EOT                WR/FR
VSN      VOLGRP LB   DATA LEFT    WRITTEN  CHUNK  ZONE  HFLAGS    AGE
-----
C00SAW   vg0 a1     0.000000    0.000000    1      1  --o-----  13m
Database was not modified.
```

If the output now shows that there is data left on this tape, see the information about managing tapes and setting the sparse flag in the *DMF 5 Administrator's Guide for SGI InfiniteStorage*.

5. Delete the tape from the DMF volume database:

```
dmfserver# dmvoladm -c "delete VSN"
```

For example:

```
burn# dmvoladm -c "delete C00SAW"
Deleted 1 record.
```



Caution: If you do not see the above output, do not continue with this tape. Reset the hold flags to the values the file had in step 1 (for more information, see *DMF 5 Administrator's Guide for SGI InfiniteStorage*). Try a different tape or contact SGI Support.

6. Remove the volume from the OpenVault system by using the `ov_vol(8)` command:

```
dmfserver# ov_vol -D -a dmf -v VSN
```

For example:

```
burn# ov_vol -D -a dmf -v C00SAW
```

Volume deleted:

```
volume name = 'C00SAW', application name = 'dmf'
cartridgeID = 'ooA69k0uDdAABqXI', side = 'SideA', partition = 'PART 1'
```

Take note of the cartridgeID field (in this case, ooA69k0uDdAABqXI), which will be required for the *cartID* variable in the next step.

7. Remove the cartridge ID entry from the OpenVault catalog by using the `ov_purge(8)` command:

```
dmserver# ov_purge -f -C cartID
```

For example, for cartridge ID ooA69k0uDdAABqXI:

```
burn# ov_purge -f -C ooA69k0uDdAABqXI
Deleted partition PART 1
Deleted cartridge ooA69k0uDdAABqXI
```

8. Verify that the tape's VSN is no longer in the OpenVault catalog by examining the output of the `ov_dumptable(8)` command, which should no longer display the cartridge ID for the VSN:

```
dmfserver# ov_dumptable -n -d'|' -c LibraryName,CartridgePCL,CartridgeID SLOT | grep VSN
```

For example, the cartridge ID ooA69k0uDdAABqXI does not appear in the following output:

```
burn# ov_dumptable -n -d'|' -c LibraryName,CartridgePCL,CartridgeID SLOT | grep C00SAW
c00|C00SAW|
```

9. Use the VTL Console to delete the migration tape. Open the left-hand tree and place the cursor over the library name. For example, for SGI-C00:

VTL0

```
> Virtual Tape Library System
  > Virtual Tape Libraries
    > SGI-C00
```

Right-click and select **Delete Tape(s)**.

10. Reuse the freed space for dump tapes. See "Create Dump Tapes" on page 83.