


## KEYBOARD RESISTORS .5% TOLERANCE

R32	6,300	R39	9,430	R46	14,148	R53	21,200	R60	31,720
R33	6,670	R40	10,000	R47	14,980	R54	22,456	R61	33,316
R34	7,074	R41	10,600	R48	15,860	R55	23,776	R62	35,600
R35	7,490	R42	11,228	R49	16,808	R56	25,200	R63	37,720
R36	7,930	R43	11,888	R50	17,800	R57	26,680	R64	40,000
R37	8,404	R44	12,600	R51	18,860	R58	28,296	R65	42,400
R38	8,900	R45	13,340	R52	20,000	R59	29,960	R66	44,912

VALUES ARE IN OHMS.

### CLAVIOLINE KEYBOARD SCHEMATIC

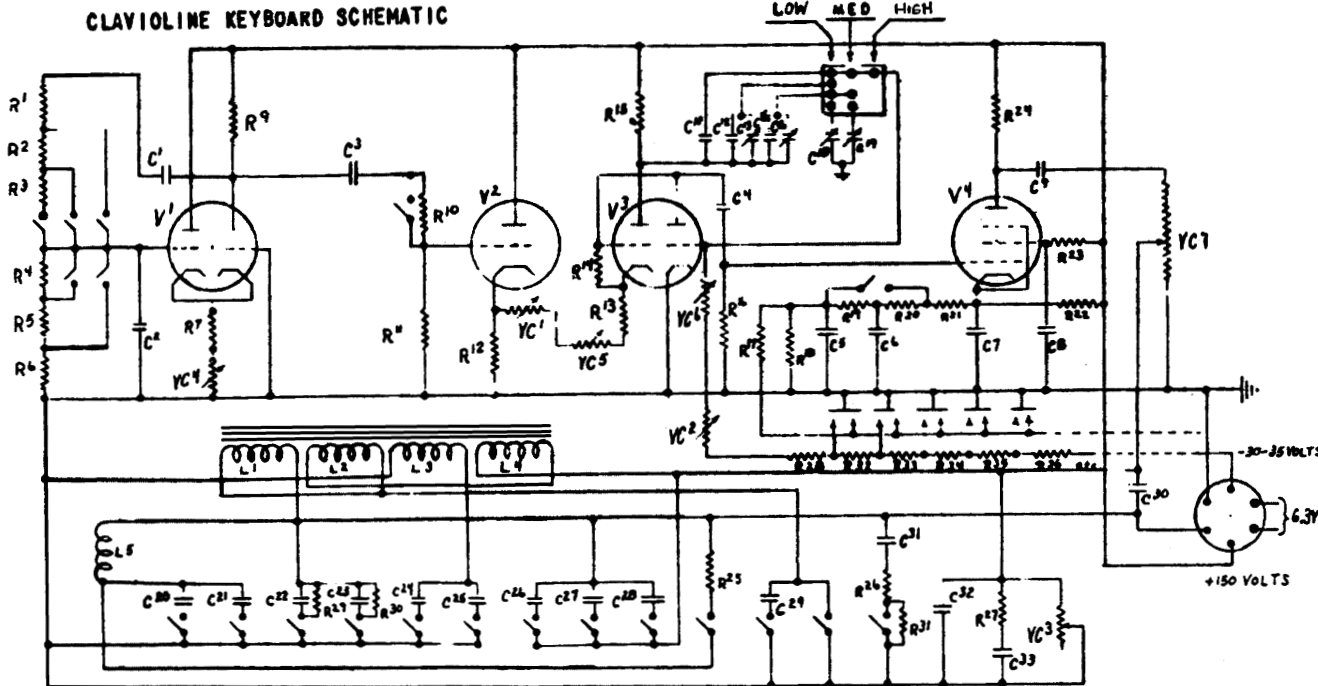

C1	.03 MFD.
C2	.03 MFD.
C3	.25 MFD.
C4	.75 MMF.
C5	.1 MFD.
C6	.1 MFD.
C7	.25 MFD.
C8	.05 MFD.
C9	.02 MFD.
C10	2300 MMF.
C11	4400 MMF.
C12	300 MMF.
C13	2100 MMF.
C14	300 MMF.
C15	750 MMF.
C16	250 MMF.
C17	.02 MFD.
C18	.005 MFD.
C19	.005 MFD.
C20	.015 MFD.
C21	.01 MFD.
C22	.05 MFD.
C23	200 MMF.
C24	.005 MFD.
C25	.015 MFD.
C26	.02 MFD.
C27	100 MMF.
C28	1 MFD.
C29	.001 MFD.
C30	.05 MFD.
C31	6SN7GT
C32	6J5
C33	6SN7GT
C34	6J7

R1	750K
R2	120K
R3	200K
R4	200K
R5	200K
R6	120K
R7	750K
R8	5.1K
R9	
R10	22K
R11	1.5 Megohm
R12	510K
R13	3.9K
R14	25K
R15	8.5K
R16	20K
R17	2.2 Megohm
R18	1K
R19	510K
R20	51K
R21	2.4K
R22	5.1K
R23	510K
R24	1. Megohm
R25	56K
R26	10K
R27	5.1K
R28	20K
R29	60-62K
R30	240K
R31	120K
R32	3 Megohm
R33	
L1-4	Tone Choke
L5	" "
VC1	10K Pot. W.W.
VC2	10K
VC3	Special
VC4	5K Pot.
VC5	5K Pot. W.W.
VC6	10K
VC7	250K Pot.

Clavioline Licensed under  
Constant Martin Patent No. 2,563,477