

Using the Phantogram Technique for a Collaborative Stereoscopic Multitouch Tabletop Game

Perry Hoberman
Interactive Media Division
School of Cinematic Arts
University of Southern California
phoberman@cinema.usc.edu

Andrew Sacher
Sacher Creative, Inc.
andrew@sachercreative.com

David Turpin
Interactive Media Division
School of Cinematic Arts
University of Southern California
dhturpin@gmail.com

Marientina Gotsis
Creative Media & Behavioral Health Center
Interactive Media Division
School of Cinematic Arts
University of Southern California
mgotsis@cinema.usc.edu

Mark Bolas
Interactive Media Division
School of Cinematic Arts
Mixed Reality Lab
Institute for Creative Technologies
University of Southern California
bolas@well.com

Rohit Varma
Department of Ophthalmology
Keck School of Medicine
University of Southern California
rvarma@usc.edu

Abstract—This paper outlines the design of a stereoscopic project utilizing the 3D phantogram technique (anamorphically distorted projection onto a horizontal surface) to implement a two-person multitouch game using the Unity 3D engine and IZ3D drivers on the Microsoft Surface tabletop display. The purpose of the project was to develop an engaging platform for the communication of basic concepts about vision and perception for a target audience of children under six and their families in a research clinic setting. Viewed from an appropriate height and position, virtual objects and characters appear to stand directly on the tabletop, facilitating a direct and intuitive mixed reality interface. The technical challenges included occlusion of stereoscopic images by users' hands, the generation of appropriate perspectives for multiple users, and the integration of a two-dimensional multitouch surface with a three-dimensional stereoscopic display.

Keywords—component; stereoscopy, computer graphics technique, mixed reality, display technology, experimental methods, collaborative interaction, 3D interaction, education, psychology, training, visualization, medicine, entertainment, virtual/digital characters, gesture

I. INTRODUCTION

A team of research faculty and an independent game producer, working with students at the University of

Southern California (USC) School of Cinematic Arts and Viterbi School of Engineering, has been collaborating with a team at USC's Doheny Eye Institute to investigate the use of interactive media to increase participation in MEPEDS (Multi-Ethnic Pediatric Eye Disease Study), the first major epidemiological eye study of visual disorders in young children in the United States.

The media components of the project are designed and intended to convey the importance of healthy vision in an entertaining, non-didactic manner, with the goal of improving attitudes toward vision correction, as well as improving long-term follow-up with eye care providers.

Dr. Rohit Varma, principal investigator of MEPEDS, is a Professor of Ophthalmology and Preventative Medicine and Director of the Glaucoma Service, Ocular Epidemiology Center and Clinical Trials Unit at the USC Keck School of Medicine. Participants for MEPEDS are mailed a letter notifying them that study coordinators will be in their neighborhood and are subsequently visited to determine eligibility. Eligible families are consented and scheduled for a comprehensive eye examination. Although free, the eye exam is time-consuming (three hours), and it is always challenging to meet recruitment goals.



Figure 1. MEPEDS 3D comic strip

Discussions between Dr. Varma, his colleagues and the research faculty at the Interactive Media Division of the School of Cinematic Arts revealed an opportunity to increase commitment and participation in MEPEDs by creating and disseminating entertaining visual materials at various steps of the study process. We mutually agreed to center materials around the subject of vision and visual perception since encouraging positive attitudes about healthy vision and vision correction would be most likely to serve overall goal of greater participation and follow-up. The subject of binocular vision (stereoscopic 3D) was chosen, in part because of the current surge of interest in stereo 3D. We felt that this fascination quite naturally leads to a desire to learn something about how stereoscopic vision actually works.

The project was structured as a three-phase transmedia narrative, built around a pair of one-eyed (cylopean) cartoon characters named *Lefty* and *Righty*, with the concept being that the two of them could only see in stereoscopic 3D if they cooperated and collaborated with each other. Each phase was designed to bring an increased sense of involvement, moving from print media to digital video, and finally to an interactive experience.

The first phase took the form of a 3D comic strip, printed using an anaglyph (red/cyan) process, included with the initial preliminary letter soliciting participation in the study (Fig. 1). This was followed by a stereo 3D animation (with the same characters), to be displayed in anaglyph on the screener's laptop during site visits (Fig. 2), as well as in full-color polarized 3D on a flat screen in the waiting room of the clinic.

The third phase is a two-person multitouch game deployed on the Microsoft Surface to be installed in the research clinic's waiting room area. The game takes place in an idyllic garden setting, with *Lefty* and *Righty*, each exploring their environment with a large magnifying glass. Sprinkled throughout the garden are a variety of tiny creatures. When users manipulate *Lefty* or *Righty* to view one of these creatures through their magnifying glasses, the creatures pop into full size and detail, illustrating how lenses and optical devices can aid and correct vision.

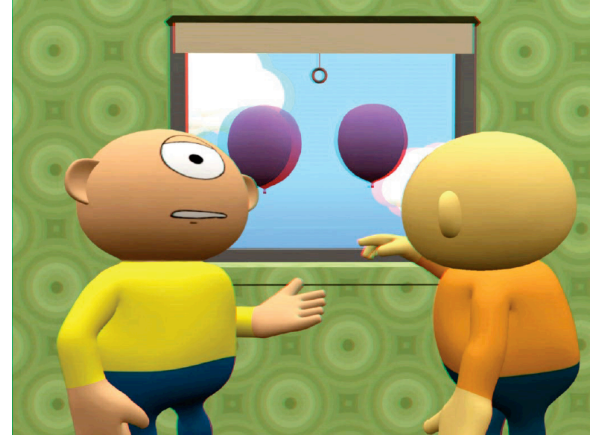


Figure 2. MEPEDS 3D animation still

II. BACKGROUND

Perspectival anamorphosis utilizes the perspective projection of an image onto a surface at an oblique angle to the projection itself, thereby requiring the image to be viewed from a specific vantage point. One of its traditional uses in art has been as a means of hiding an image from immediate apprehension (as in the painter Hans Holbein's *The Ambassadors*, where a distorted view of a skull initially appears as a ghostly wraith, only becoming coherent when seen from an acute angle).

Anamorphosis can also be used as a means of enhancing the spatial realism of an image by emphasizing a single ideal vantage point from which to view the image; as such, it is part of the arsenal of *trompe l'oeil* effects employed by various artists for centuries. In a certain sense, all normal perspective projection can be seen as merely a special case of anamorphic projection, in which the projection surface is at right angles to the line of sight; and in fact, all perspectival images also posit their own ideal vantage point (usually a center point directly in front of the image).

A *phantogram* is a stereoscopic anamorphic image, generally made to be viewed on a horizontal surface such as a tabletop from an angle of approximately 45 degrees [1] By exploiting the conjunction of the (actual) flat tabletop with its (virtual) representation in the stereoscopic image, objects can be made to convincingly 'pop up' from the tabletop with surprising realism, even when displayed as anaglyphs (red/blue filtered images).

A phantogram can thus be seen as a special case of the viewer-centric perspective required by the CAVE™ (Cave Automatic Virtual Environment) [2] and similar projection-based head-tracked virtual reality configurations. In fact, this type of viewer-centric projection is precisely the real-time calculation of anamorphic projection, updated continuously through the use of head-tracking. Like any projection-based viewer-centric display, phantogram views are generated with an off-axis frustum, in which the line of sight is at some oblique angle to the projection surface. These displays are also instances of *orthostereoscopic* imaging, in which the position and optics of the virtual cameras are modeled as precisely as possible to the viewer's position and gaze.

Lacking the headtracking and immersiveness of a CAVETM (as well as some recent tabletop projects; see [3]), the phantogram might be seen as a rather primitive and limited media form, especially in its usual presentation a fixed anaglyph image. However, it exhibits some subtle qualities that enhance its effectiveness, in spite of its limitations.

By using a horizontal rather than an upright projection surface, the phantogram emphasizes the weight and solidity of virtual objects; rather than floating in space, or resting on equally virtual surfaces, the objects in a phantogram seem to sit on the actual surface of the tabletop. And because the boundary of the image is congruent with the tabletop, the virtual objects can be seen in same context as the table itself, giving them added status as objects in the world. For these reasons, phantograms could be called a form of (proto-) augmented reality, in which virtual objects are apprehended as, and registered to, the physical environment.

Although any particular phantogram has to be generated to correspond to a single defined vantage point, there is generally a zone around this point from which the phantogram can still be viewed, albeit with some amount of distortion depending on the direction (a skew from any horizontal offset, a compression/extension resulting from varying distance). This distortion is immediately apparent on a change of position, but to some extent the visual system adapts to the new vantage point over a short period (just as we adapt to off-axis viewing angles in movie theatres), and thus images can be viewed convincingly by several viewers at once (just as a CAVE can be viewed from a number of angles nearby the head-tracked position), even without head-tracking.

The *Microsoft Surface* is a table-sized multi-touch, multi-user platform that uses a built-in rear-projection system to display a 1024 x 768 image on a 30" horizontal screen surface. Designed to withstand harsh environments (such as museums, restaurants and bars), the Surface is fairly rugged, and is thus an appropriate choice for the deployment of an interactive game in a public setting for young children. The tabletop is 27 inches off the ground, making it an ideal height for small children seated in appropriately-sized chairs or stools. Using a five camera vision system and a near-infrared light source, the Surface is able to track up to 52 simultaneous touches at a resolution of 48 dots per inch.

III. CONCEPT DESIGN

In designing a framework for the game prototype, the team had a number of specific requirements that needed to be coordinated and reconciled. Because the game was going to be played primarily by children under the age of six and their caretakers, we decided to design a simple, casual, non-competitive game for two [4]. Although the Microsoft Surface is designed to accommodate users seated anywhere around the unit, we decided against having the two players face each other across the table, since we wanted to make an experience that would encourage collaboration and cooperation [5]. This also fit well with the requirements for a phantogram, which has fairly stringent requirements for viewing position. The Surface is a self-contained unit with a

fixed, non-stereo ready projector, thus we chose to employ the anaglyph stereo technique in red and cyan.

Although it is possible to treat the projection surface of a phantogram as a window on a virtual world (just like a normal upright screen), it is most effective when the ground plane is matched with the screen surface, which results in all other virtual objects being placed stereoscopically in front of that surface. In other words, every object other than the ground plane has negative parallax (where the left eye image appears to the right of the right eye image). Because the stereoscopic illusion breaks down when objects having negative parallax are clipped by the projection edge (since they cannot be simultaneously in front of and in back of the screen edge), it is preferable, if not necessary, to keep objects contained entirely within the projected area.



Figure 3. *Lefty* and *Righty* at 'home' on the Microsoft Surface

Because a phantogram depends on the confluence of the physical and the virtual to create its effect, and because it is a form of near-field (within arm's length) stereography, the scale of virtual objects is perceived to not be the result of the optics of a particular camera, but as the actual size of their presentation. We therefore decided to treat the table surface as a miniature toy-sized world seen by from a fixed vantage point, with *Lefty* and *Righty* appearing to be only a few inches in height. This was in keeping in with the game's target audience of young children.

The game design team developed and presented a number of scenarios, most of which foregrounded the pleasure and utility of stereoscopic vision. In one scenario that was partially developed, the characters appear inside their home, with all furnishings appearing as two-dimensional pictures scattered on the floor. When both characters stand side-by-side in front of one of these pictures (thus creating the condition for binocular vision) it is suddenly pumped up into a full three dimensional object (like a balloon) that can then be utilized by the characters (Fig. 3).

Once we decided on the garden scenario, assets were developed in Maya, including fully rigged versions of *Lefty* and *Righty*, with textures created in Photoshop and other programs.

IV. IMPLEMENTATION

We developed the application using the Unity 3D engine, which is well-supported and capable of displaying stereoscopic images. Unity is cross-platform, and day-to-day development took place mostly on the Apple side. A custom script was developed to handle the off-axis projection (using the Camera Class projectionMatrix variable) and the generation of left-right anaglyph images (using Render Textures), as well one for communicating with a concurrently-running application that processed Surface touch events.

We discovered a Unity engine bug that disabled Render Textures when using an off-axis frustum, making it impossible to generate and display an anaglyph phantogram image at the same time. A workaround was found by using a stereoscopic driver available from iZ3D; this freed up Unity to render the views directly to a window (instead of a Render Texture), with iZ3D handling the task of combining the left and right views into a single anaglyph image.

V. INTERACTION DESIGN

In the final version of the game, the two characters Lefty and Righty appear in a fanciful rural garden setting, each holding a large magnifying glass (about the size of the characters' heads). Two users can simultaneously steer the characters to pursue small crawling and flying creatures that populate the garden. When one of the characters manages to catch up with one of the creatures, that character raises his magnifying glass, thereby 'magnifying' the creature, which suddenly pops into scale and detail (Fig. 4).

In the process of attempting to find an intuitive and straightforward method for controlling the characters, we experimented with a number of different interaction models. Objects placed above the tabletop (with negative parallax) present a real challenge for touch-based interaction, since touch is by definition restricted to the two-dimensional tabletop, making periodic occlusion of the objects by the user's hand almost inevitable. This momentarily destroys the stereoscopic illusion.

We considered treating the table surface as a transparent ceiling, with the garden scene and characters placed below it (with positive parallax), but it was found that this largely removed any sense that the space of the game was contiguous with our own world. Eventually we accepted the inevitability of these occlusions, and instead focused on methods for minimizing their occurrence and duration. Therefore, actions that required the user to continuously touch the character (such as pushing or grabbing) were rejected, in favor of actions that encouraged users to touch the flat ground plane instead.



Figure 4. *Lefty* and *Righty* in the garden

At the other extreme, the most "hands off" method involved dragging a finger along the ground to set a path for the character to follow, but this was felt to be too indirect, analogous to dropping a trail of breadcrumbs for the characters to follow. We also didn't want players to become preoccupied with drawing patterns on the surface, thus confusing the game narrative.

The most intuitive control seemed to be somewhere in between, in effect pointing or dragging along the desired location, with the character following close behind. We found that occlusions could be minimized by introducing a slight lag to the character's response, which usually resulted in a bit of distance between the character and the user's hand, while maintaining a sense of close control. Instead of placing an absolute limit on how close a touch had to be to initiate a character's movement, we implemented a limit for how far or fast the character could move; in effect, this meant that a distant touch would only bring the character partway to the desired destination, with the almost universal response being to next touch an intermediate point to coax the character closer. Since there was no foolproof way to tell which player initiated any particular touch, we relied on proximity to the characters and to previous touches, ignoring any touches that were equidistant from both characters.

Each touch (whether effective or not) triggered a subtle sparkling particle effect at the location of the touch, accompanied by a sound effect, which provided instant and perceptible feedback for every interaction. A fairly quiet ambient soundtrack of natural sounds, as well as appropriate sound effects triggered upon the appearance of each creature, enhanced user involvement as well.

VI. FUTURE DIRECTIONS

We are currently beginning the process of assessing the prototype game's conceptual affectiveness and technical robustness by observing its use on site in the MEPEDS clinic in Alhambra. We then plan to develop the prototype further, as well as implement additional gameplay based on the same framework. Preliminary data shows the game most understandable conceptually by children between ages 4-6.

The use of anaglyph display severely restricted the color and visual style of the project, and we are anxious to move beyond its limits. Available full-color stereoscopic display technologies include field-sequential (requiring active shutter glasses), micro-polarizer (with passive polarizing glasses), and lenticular (autostereoscopic) displays. The target audience of small children precludes the use of active shutter glasses, but passive glasses would be acceptable. Autostereoscopic displays have limited viewing zones, but obviously a glasses-free solution would be attractive.

A camera-based system for either head-tracking and/or "in the air" three-dimensional interaction (as in some other recent projects; see [6]) is also under consideration, but we should emphasize that we were pleasantly surprised at how effective the technique of fixed stereoscopic anamorphosis was in creating a convincing augmented reality experience.

ACKNOWLEDGMENTS

This project was made possible through a gift by the *Going Beneath the Surface* program of Microsoft Research and funding through grant 5U10EY014472-09 by the National Institutes of Health. We would like to thank the MxR lab, the MEPEDS staff, and following students and alumni who aided design, development and production: Damon Stea, Devon Johnson, Keren Albala, Zachary Radke, Nitin John, Dhaval Shah and Manjeet Chawla. Special thanks to Ray Zone.

REFERENCES

[1] A.J.Macy, inventor; 1926 July. 13. Process and method of effective

angular levitation of printed imaged and the resulting proeuct. United States patent US 1,592,034.

- [2] Cruz-Neira, C., Sandin, D.J., DeFanti, T.A., Kenyon, R.V., and Hart, J.C. "The CAVE: Audio Visual Experience Automatic Virtual Environment," *Communications of the ACM*, Vol. 35, No. 6, June 1992, pp. 65-72.
- [3] de la Rivière, J., Kervégant, C., Dittlo, N., Courtois, M., and Orvain, E. 2010. 3D multitouch: when tactile tables meet immersive visualization technologies. In *ACM SIGGRAPH 2010 Emerging Technologies* (Los Angeles, California, July 26 - 30, 2010).
- [4] Rick, J., Harris, A., Marshall, P., Fleck, R., Yuill, N., and Rogers, Y. 2009. Children designing together on a multi-touch tabletop: an analysis of spatial orientation and user interactions. In *Proceedings of the 8th international Conference on interaction Design and Children* (Como, Italy, June 03 - 05, 2009).
- [5] Gross, T., Fetter, M., and Liebsch, S. 2008. The cuetable: cooperative and competitive multi-touch interaction on a tabletop. In *CHI '08 Extended Abstracts on Human Factors in Computing Systems* (Florence, Italy, April 05 - 10, 2008). CHI '08. ACM, New York, NY, 3465-3470. DOI= <http://doi.acm.org/10.1145/1358628.1358875>
- [6] Hilliges, O., Izadi, S., Wilson, A. D., Hodges, S., Garcia-Mendoza, A., and Butz, A. 2009. Interactions in the air: adding further depth to interactive tabletops. In *Proceedings of the 22nd Annual ACM Symposium on User interface Software and Technology* (Victoria, BC, Canada, October 04 - 07, 2009).