

Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------



## Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

### Engine and cooling system 80, 1.6 CAT 1993 to 1995

Type		ADA (74kW) SOHC 8V
Capacity (cm <sup>3</sup> ) / number of cylinders		1595 / 4
Compression ratio / pressure	bar	10.5 / ≥7.0
Oil pressure	bar	[2.0]
Oil temperature	°C	80
Valve clearance - inlet	mm	0: Hyd.
Valve clearance - exhaust	mm	0: Hyd.
Firing order		1-3-4-2
No 1 cylinder position		TBE
Thermostat opening temperature	°C	85
Radiator cap pressure	bar	1.2 to 1.5

### Fuel system 80, 1.6 CAT 1993 to 1995

Idle speed - manual [auto]	rpm	800 to 900 N/A
Fast idle speed - manual [auto]	rpm	—
CO @ idle speed [3000 rpm] - see page VI	%	≤0.5 N/A
HC @ idle speed [3000 rpm] - see page VI	ppm	≤200
CO <sub>2</sub> @ idle speed [3000 rpm] - see page VI	%	—
O <sub>2</sub> @ idle speed [3000 rpm] - see page VI	%	—
Carburettor / fuel injection		—
Type / ref		MPI
Main jet / needle		—
Injection pressure	bar	—
Pump pressure	bar	—
Octane rating	RON	95[U]

### Ignition system 80, 1.6 CAT 1993 to 1995

Type		FEI
Ignition coil		N70
Primary resistance	ohms	0.5 to 1.5
Ballast resistor	ohms	—
Voltage - Tmnl 15(+) to earth	V	—
Distributor		Bosch
Points gap (air gap)	mm	—
Dwell angle	° (%)	—
Condenser capacity	µF	—
Rotation		Clockwise
Ignition timing - basic [static	° Crankshaft @ rpm	Computer control N/A
V = Vacuum NV = No Vacuum		—
Total ignition advance	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Centrifugal check.	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Vacuum range check	mbar	Computer control
Maximum vacuum advance	° Crankshaft	—
Spark plugs		NGK
Type		BUR6ET
Electrode gap	mm	0.90 to 1.10

### Electrical system 80, 1.6 CAT 1993 to 1995

Battery	V / CC / RC	12 / 36, 45Ah
Alternator voltage / full load current / engine rpm		14.0 / _ / 2000
Starter motor current / voltage - cranking	A / V	—
- locked	A / V	—

### Running gear 80, 1.6 CAT 1993 to 1995

<b>Brakes -</b>		
Front (min. friction material thickness)	mm	2.0
Rear (min. friction material thickness)	mm	2.5

<b>Tyres</b>		
Saloon	Size	195/65x15: 205/60x15
Estate / Van	Size	195/65x15: 205/60x15
Pressure - front / rear - Saloon	bar	2.0 / 2.0
- Estate / Van	bar	2.0 / 2.0

<b>Front suspension / wheel alignment</b>		
Toe-in (+) / Toe-out (-)	mm [°]	[+10'±10']
Camber		-45'±30'
Castor		+1°15'±30'
King pin inclination		—

<b>Rear suspension / wheel alignment</b>		
Toe-in (+) / Toe-out (-)	mm [°]	[+20'±20']
Camber		-1°±20'


### Torque wrench settings 80, 1.6 CAT 1993 to 1995

Cylinder head - stage 1	Nm	40 N
- stage 2	Nm	60
Cylinder head - stage 3	Nm	+ 90°
- stage 4	Nm	+ 90°
Big-end bearings	Nm	30 + 90°
Main bearings	Nm	65
Clutch cover	Nm	25
Flywheel [driveplate]	Nm	60 + 90° N
Front hubs	Nm	265 LkC
Rear hubs	Nm	WSM
Wheel nuts / bolts	Nm	110
Spark plugs	Nm	25

### Capacities 80, 1.6 CAT 1993 to 1995

Engine oil & filter	litres	3.0
Gearbox - 4-speed [5-speed]	litres	2.4
Automatic transmission - refill	litres	—
Final drive	litres	WT
Cooling system	litres	7.0
Fuel tank	litres	68

### Notes and Illustrations

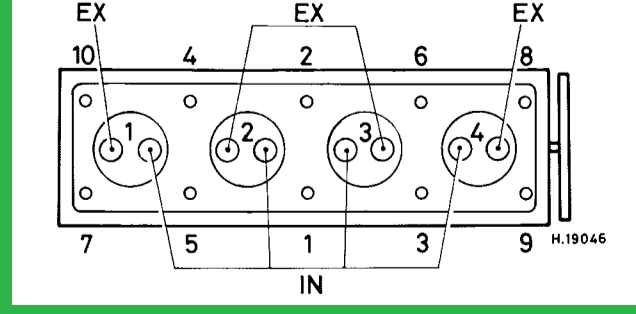

1595 cm<sup>3</sup>