

Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------



# Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

### Engine and cooling system NSX 1991 to 1997

Type		C30A DOHC 24V V-TEC 201kW
Capacity (cm <sup>3</sup> ) / number of cylinders		2977 / 6
Compression ratio / pressure	bar	10.2 / ≥10.0
Oil pressure	bar	0.7 [3.5]
Oil temperature	°C	80
Valve clearance - inlet	mm	0.15 to 0.19
Valve clearance - exhaust	mm	0.17 to 0.21
Firing order		1-4-2-5-3-6
No 1 cylinder position		PER
Thermostat opening temperature	°C	78±2
Radiator cap pressure	bar	0.93 to 1.23

### Fuel system NSX 1991 to 1997

Idle speed - manual [auto]	rpm	800±50 [750±50]
Fast idle speed - manual [auto]	rpm	1500±400
CO @ idle speed [3000 rpm] - see page VI	%	≤0.1 N/A
HC @ idle speed [3000 rpm] - see page VI	ppm	≤200
CO <sub>2</sub> @ idle speed [3000 rpm] - see page VI	%	-
O <sub>2</sub> @ idle speed [3000 rpm] - see page VI	%	-
Carburettor / fuel injection		Honda
Type / ref		PGM-Fi MPI
Main jet / needle		-
Injection pressure	bar	2.7 to 3.2
Pump pressure	bar	-
Octane rating	RON	95[U]

### Ignition system NSX 1991 to 1997

Type		Direct electronic
Ignition coil		-
Primary resistance	ohms	0.9 to 1.1
Ballast resistor	ohms	-
Voltage - Tmnl 15(+) to earth	V	-
Distributor		-
Points gap (air gap)	mm	-
Dwell angle	° (%)	-
Condenser capacity	µF	-
Rotation		-
Ignition timing - basic [static V = Vacuum NV = No Vacuum]	° Crankshaft @ rpm	15±2 BTDC @ 800 [750]
Total ignition advance	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	-
	° Crankshaft @ rpm	-
Centrifugal check.	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	-
	° Crankshaft @ rpm	-
Vacuum range check	mbar	Computer control
Maximum vacuum advance	° Crankshaft	-
Spark plugs		NGK
Type		PFR6G-11
Electrode gap	mm	1.00 to 1.10

### Electrical system NSX 1991 to 1997

Battery	V / CC / RC	12 / 65Ah
Alternator voltage / full load current / engine rpm		13.5 / 110 / 2000
Starter motor current / voltage - cranking	A / V	-
- locked	A / V	-

### Running gear NSX 1991 to 1997

<b>Brakes -</b>		
Front (min. friction material thickness)	mm	1.6
Rear (min. friction material thickness)	mm	1.6
<b>Tyres</b>		
Saloon	Size	205/50x15:225/50x16:245/40x17
Estate / Van	Size	-
Pressure - front / rear - Saloon	bar	Refer to vehicle
- Estate / Van	bar	-
<b>Front suspension / wheel alignment</b>		
Toe-in (+) / Toe-out (-)	mm [°]	-3.5±1.0
Camber		-20'±30'
Castor		+8°±45'
King pin inclination		-
<b>Rear suspension / wheel alignment</b>		
Toe-in (+) / Toe-out (-)	mm [°]	+6.0±1.0
Camber		-1°30'±30'


### Torque wrench settings NSX 1991 to 1997

Cylinder head - stage 1	Nm	40
- stage 2	Nm	78
Cylinder head - stage 3	Nm	-
- stage 4	Nm	-
Big-end bearings	Nm	20 + 95°
Main bearings	Nm	M10: 50. M11: 66
Clutch cover	Nm	26
Flywheel [driveplate]	Nm	105 [75]
Front hubs	Nm	335
Rear hubs	Nm	335
Wheel nuts / bolts	Nm	110
Spark plugs	Nm	18


### Capacities NSX 1991 to 1997

Engine oil & filter	litres	5.0
Gearbox - 4-speed [5-speed]	litres	2.7
Automatic transmission - refill	litres	2.9
Final drive	litres	WT
Cooling system	litres	16.0 [AT: 16.5]
Fuel tank	litres	70

### Notes and Illustrations

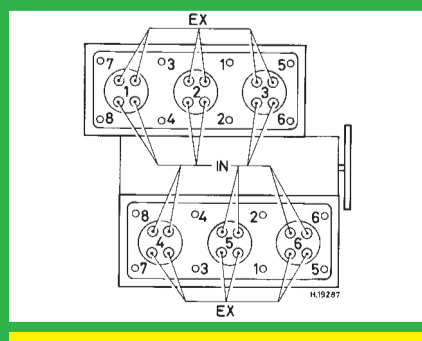

2977 cm<sup>3</sup>

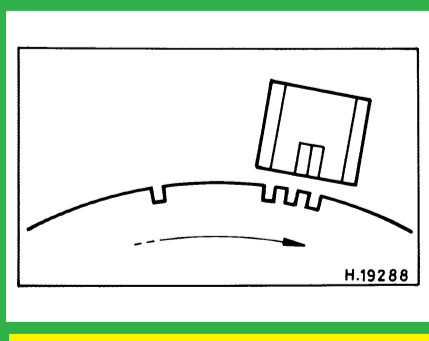

2977 cm<sup>3</sup>