

Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------



Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system 911 Carrera 2 & 4 CAT 1990 to 1994

Type	M64/01 [AT: M64/02]	184kW
Capacity (cm ³) / number of cylinders	3600 / 6	
Compression ratio / pressure	bar	11.3 / _
Oil pressure	bar	[3.5]
Oil temperature	°C	80 to 100
Valve clearance - inlet	mm	0.10
Valve clearance - exhaust	mm	0.10
Firing order		1-6-2-4-3-5
No 1 cylinder position		PEL
Thermostat opening temperature	°C	_
Radiator cap pressure	bar	_

Fuel system 911 Carrera 2 & 4 CAT 1990 to 1994

Idle speed - manual [auto]	rpm	880±40 N/A
Fast idle speed - manual [auto]	rpm	_
CO @ idle speed [3000 rpm] - see page VI	%	0.4 to 1.2
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO ₂ @ idle speed [3000 rpm] - see page VI	%	_
O ₂ @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection		Bosch
Type / ref		DME Sequential Motronic
Main jet / needle		_
Injection pressure	bar	_
Pump pressure	bar	3.6 to 4.0
Octane rating	RON	95[U]

Ignition system 911 Carrera 2 & 4 CAT 1990 to 1994

Type		DME Motronic ¹
Ignition coil		2x Bosch
Primary resistance	ohms	0.4 to 0.7
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor		Bosch
Points gap (air gap)	mm	_
Dwell angle	° (%)	_
Condenser capacity	µF	_
Rotation		_
Ignition timing - basic [static	° Crankshaft @ rpm	Computer control
V = Vacuum NV = No Vacuum		_
Total ignition advance	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Vacuum range check	mbar	Computer control
Maximum vacuum advance	° Crankshaft	_
Spark plugs		Bosch/Champion
Type		FR5DTC / RC6BYC
Electrode gap	mm	0.80

Electrical system 911 Carrera 2 & 4 CAT 1990 to 1994

Battery	V / CC / RC	12 / 72Ah
Alternator voltage / full load current / engine rpm		_
Starter motor current / voltage - cranking	A / V	_
- locked	A / V	_

Running gear 911 Carrera 2 & 4 CAT 1990 to 1994

Brakes -		
Front (min. friction material thickness)	mm	2.0
Rear (min. friction material thickness)	mm	2.0

Tyres		
Saloon	Size	205/55x16: 225/50x16
Estate / Van	Size	_
Pressure - front / rear - Saloon	bar	2.5 / 3.0
- Estate / Van	bar	_

Front suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	[+15'±5']
Camber		0±10'
Castor		+4°10'±15'
King pin inclination		_

Rear suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	[+10'±5'] PW
Camber		-20'±10'

Torque wrench settings 911 Carrera 2 & 4 CAT 1990 to 1994

Cylinder head - stage 1	Nm	15
- stage 2	Nm	+ 90°
Cylinder head - stage 3	Nm	_
- stage 4	Nm	_
Big-end bearings	Nm	15 + 90° + 90°
Main bearings	Nm	Crankcase: 35
Clutch cover	Nm	20 to 25
Flywheel [driveplate]	Nm	90
Front hubs	Nm	WSM
Rear hubs	Nm	WSM
Wheel nuts / bolts	Nm	130
Spark plugs	Nm	30


Capacities 911 Carrera 2 & 4 CAT 1990 to 1994

Engine oil & filter	litres	11.5
Gearbox - 4-speed [5-speed]	litres	3.8
Automatic transmission - refill	litres	9.0
Final drive	litres	AT: 0.9 ²
Cooling system	litres	_
Fuel tank	litres	77

Notes and Illustrations

¹Twin spark ignition system with knock control

²Carrera 4: Rear: WT. Front: 1.2

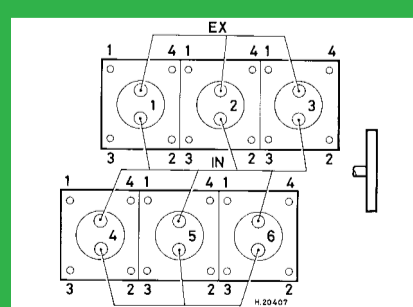

3600 cm³