


Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------

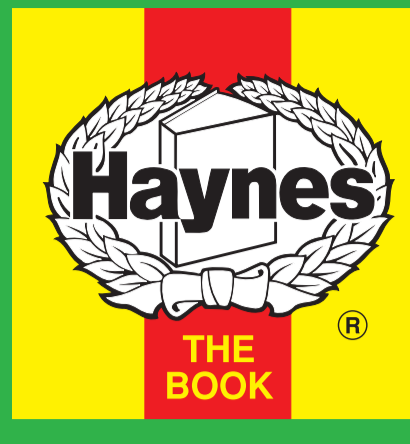

Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system Calibra 2.0i & 4x4 1990 to 1996

Type	C20NE SOHC 85kW 91/441/EEC	
Capacity (cm ³) / number of cylinders	1998 / 4	
Compression ratio / pressure	bar	9.2 / _
Oil pressure	bar	1.5
Oil temperature	°C	≥80
Valve clearance - inlet	mm	0: Hyd.
Valve clearance - exhaust	mm	0: Hyd.
Firing order	1-3-4-2	
No 1 cylinder position	TBE	
Thermostat opening temperature	°C	91 to 107
Radiator cap pressure	bar	1.20 to 1.35

Fuel system Calibra 2.0i & 4x4 1990 to 1996

Idle speed - manual [auto]	rpm	720 to 880. 4x4: 890 to 990
Fast idle speed - manual [auto]	rpm	_
CO @ idle speed [3000 rpm] - see page VI	%	≤0.5
HC @ idle speed [3000 rpm] - see page VI	ppm	≤200
CO ₂ @ idle speed [3000 rpm] - see page VI	%	_
O ₂ @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection	Bosch	
Type / ref	M1.5.4-Motronic	
Main jet / needle	_	
Injection pressure	bar	1.8 to 2.2
Pump pressure	bar	2.5 to 3.0
Octane rating	RON	95[U]

Ignition system Calibra 2.0i & 4x4 1990 to 1996

Type	DME Motronic	
Ignition coil	Bosch	
Primary resistance	ohms	_
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor	Bosch	
Points gap (air gap)	mm	_
Dwell angle	° (%)	Electronic control
Condenser capacity	µF	_
Rotation	_	
Ignition timing - basic [static	° Crankshaft @ rpm	8 to 12 BTDC @ idle N/A
V = Vacuum NV = No Vacuum	NV	
Total ignition advance	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Vacuum range check	mbar	Computer control
Maximum vacuum advance	° Crankshaft	_
Spark plugs	Bosch/Champion	
Type	WR8DC / RN7YCC	
Electrode gap	mm	0.70 to 0.80

Electrical system Calibra 2.0i & 4x4 1990 to 1996

Battery	V / CC / RC	12 / 210 / 65
Alternator voltage / full load current / engine rpm	13.6 to 14.0 / 70, 90 / 3000	
Starter motor current / voltage - cranking	A / V	35 to 80 / 10.6 to 11.5
- locked	A / V	350 to 820 / 4.5 to 8.6

Running gear Calibra 2.0i & 4x4 1990 to 1996

Brakes -		
Front (min. friction material thickness)	mm	7.0 with backing
Rear (min. friction material thickness)	mm	7.0 with backing

Tyres		
Saloon	Size	195/60x14:195/60x15:205/55x15
Estate / Van	Size	_
Pressure - front / rear - Saloon	bar	2.3 / 2.1: 2.4 / 2.2
- Estate / Van	bar	_

Front suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	[-15'±10']
Camber	-40'±45' L	
Castor	+2°±1° L	
King pin inclination	_	

Rear suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	[-22'+30'-20']
Camber	-2°17'±41'	

Torque wrench settings Calibra 2.0i & 4x4 1990 to 1996


Cylinder head - stage 1	Nm	25 N
- stage 2	Nm	+90°
Cylinder head - stage 3	Nm	+90°
- stage 4	Nm	+90°
Big-end bearings	Nm	35 + 45° +15° N
Main bearings	Nm	50 + 45° +15° N
Clutch cover	Nm	15
Flywheel [driveplate]	Nm	65 + 30° +15° N [65]
Front hubs	Nm	WSM
Rear hubs	Nm	WSM ¹
Wheel nuts / bolts	Nm	110
Spark plugs	Nm	25

Capacities Calibra 2.0i & 4x4 1990 to 1996

Engine oil & filter	litres	4.0
Gearbox - 4-speed [5-speed]	litres	1.9. Transfer: 0.6
Automatic transmission - refill	litres	3.0 to 3.5
Final drive	litres	WT
Cooling system	litres	7.2 [AT: 7.1]
Fuel tank	litres	65. 91 ▶: 63

Notes and Illustrations

¹4x4: 50 + 60° +15°

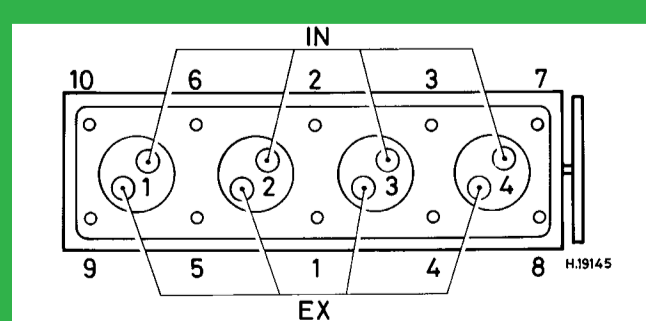

1998 cm³, 8V