

Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------



Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system Carlton/Omega-A 1.8 1986 to 1991

Type		18SV SOHC. 66kW. 15.04
Capacity (cm ³) / number of cylinders		1796 / 4
Compression ratio / pressure	bar	10.0 / _
Oil pressure	bar	1.5
Oil temperature	°C	≥80
Valve clearance - inlet	mm	0: Hyd.
Valve clearance - exhaust	mm	0: Hyd.
Firing order		1-3-4-2
No 1 cylinder position		TBE
Thermostat opening temperature	°C	92 to 107
Radiator cap pressure	bar	1.2 to 1.3

Fuel system Carlton/Omega-A 1.8 1986 to 1991

Idle speed - manual [auto]	rpm	850 to 900 [750 to 800]
Fast idle speed - manual [auto]	rpm	1900 to 2300
CO @ idle speed [3000 rpm] - see page VI	%	0.5 to 1.0
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO ₂ @ idle speed [3000 rpm] - see page VI	%	_
O ₂ @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection		Pierburg
Type / ref		2E3 90 107 504 [AT: 505]
Main jet / needle		107.5, 132.5
Injection pressure	bar	_
Pump pressure	bar	0.25 to 0.33
Octane rating	RON	98[E 95 RON] ¹

Ignition system Carlton/Omega-A 1.8 1986 to 1991

Type		MSTS-i
Ignition coil		Bosch 0 221 600 053
Primary resistance	ohms	0.70 to 0.75
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor		Bosch
Points gap (air gap)	mm	_
Dwell angle	° (%)	Electronic control
Condenser capacity	µF	_
Rotation		Anticlockwise
Ignition timing - basic [static	° Crankshaft @ rpm	10±2 BTDC @ idle N/A ²
V = Vacuum NV = No Vacuum		NV
Total ignition advance	° Crankshaft @ rpm	12 to 17 @ 2000
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Vacuum range check	mbar	Computer control
Maximum vacuum advance	° Crankshaft	_
Spark plugs		AC/Champion
Type		CR42CXLS / RN7YC
Electrode gap	mm	0.70 to 0.80

Electrical system Carlton/Omega-A 1.8 1986 to 1991

Battery	V / CC / RC	12 / 44Ah
Alternator voltage / full load current / engine rpm		13.8 to 14.8 / 55-90 / 2000
Starter motor current / voltage - cranking	A / V	75 / 11.5 (no load)
- locked	A / V	475 to 600 / 12

Running gear Carlton/Omega-A 1.8 1986 to 1991

Brakes -		
Front (min. friction material thickness)	mm	7.0 with backing
Rear (min. friction material thickness)	mm	7.0 with backing
Tyres		
Saloon	Size	175x14: 185/70x14: 195/65x15
Estate / Van	Size	175x14: 185x14: 185/70x14
Pressure - front / rear - Saloon	bar	2.0 / 2.0
- Estate / Van	bar	2.0 / 2.2

Front suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	[0 to +20'] L
Camber		-1°55' to -25'
Castor		³
King pin inclination		_

Rear suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	-0.5 to +5.5 ⁴
Camber		4D: -2°20' to -1°. 5D ⁵

Torque wrench settings Carlton/Omega-A 1.8 1986 to 1991

Cylinder head - stage 1	Nm	25 N
- stage 2	Nm	+90°
Cylinder head - stage 3	Nm	+90°
- stage 4	Nm	+90°
Big-end bearings	Nm	35 + 45° to 60° N
Main bearings	Nm	50 + 40° to 50° N
Clutch cover	Nm	15
Flywheel [driveplate]	Nm	65 + 30° to 45° ⁶
Front hubs	Nm	320
Rear hubs	Nm	WSM
Wheel nuts / bolts	Nm	90
Spark plugs	Nm	25

Capacities Carlton/Omega-A 1.8 1986 to 1991

Engine oil & filter	litres	4.5
Gearbox - 4-speed [5-speed]	litres	1.9
Automatic transmission - refill	litres	5.5
Final drive	litres	4D: 0.8. 5D: 1.0
Cooling system	litres	6.4
Fuel tank	litres	4D: 75. 5D: 70

Notes and Illustrations

¹Octane rating plug = 95 RON. 89 ▶: [E 95 RON]

²89 ▶: 14±3 BTDC @ 2000±50 N/A


³4D manual steering: +2° to 4°. PAS: +4°30' to 6°30' 5D manual steering: +1°30' to 3°30'. PAS: +4° to 6°

⁴5D: 0 to +6.0


⁵-2°5' to -45'

⁶Use locking compound


1: Idle speed 2: CO / Mixture

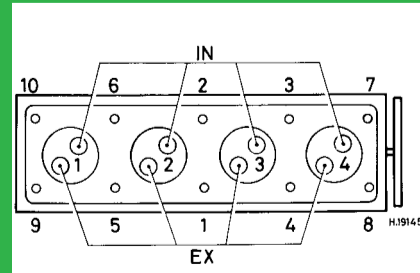

1796 cm³, 8V

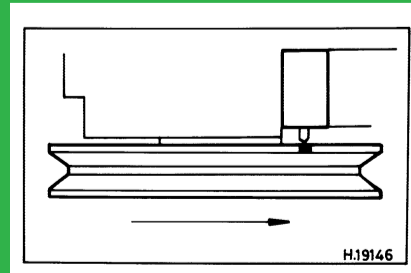

1796 cm³, 8V

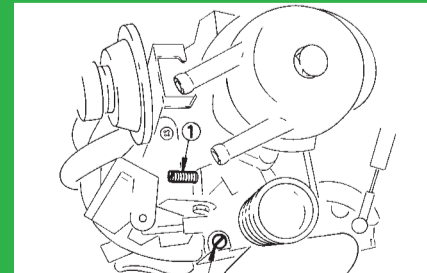

Pierburg 2E3